

PART III: EXHIBITS

State Timber Sale Contract
No. 341-06-38
Cole Mountain Combo

EXHIBIT B

Page 1 of 3
629-Form 341-203
Revised 06/97


OREGON DEPARTMENT OF FORESTRY

TIMBER SALE OPERATIONS PLAN

(See Page 2 for instructions)

Date Received by STATE: _____

(5) State Brand Information (complete):



(1) Contract No.: 341-06-38

(2) Sale Name: Cole Mountain Combo

(3) Contract Expiration Date: October 31, 2008

Project Completion Dates: October 31, 2007

(4) Purchaser: _____

(6) Purchaser Representatives:

Projects: _____

Phone: _____

Cell/Other

Phone: _____

Home: _____

Projects: _____

Phone: _____

Cell/Other

Phone: _____

Home: _____

Projects: _____

Phone: _____

Cell/Other

Phone: _____

Home: _____

Projects: _____

Phone: _____

Cell/Other

Phone: _____

Home: _____

Logging: _____

Phone: _____

Cell/Other

Phone: _____

Home: _____

Logging: _____

Phone: _____

Cell/Other

Phone: _____

Home: _____

Logging: _____

Phone: _____

Cell/Other

Phone: _____

Home: _____

Logging: _____

Phone: _____

Cell/Other

Phone: _____

Home: _____

(7) State Representatives:

Projects: _____

Phone: (503) 352-5451

Cell/Other

Phone: _____

Home: _____

Logging: _____

Phone: _____

Cell/Other

Phone: _____

Home: _____

(8) Name of Subcontractors & Starting Dates:

Projects: No(s) _____ - _____

Date: _____

Phone: _____

No(s) _____ - _____

Date: _____

Phone: _____

No(s) _____ - _____

Date: _____

Phone: _____

No(s) _____ - _____

Date: _____

Phone: _____

Logging: Felling _____

Date: _____

Phone: _____

Yarding: _____

Date: _____

Phone: _____

(9) Comments:

(10) Operations Map: Attach a copy of timber sale Exhibit A or other suitable map which plainly shows the items listed on the instruction sheet.

EXHIBIT B
INSTRUCTION SHEET FOR OPERATIONS PLAN

SUBMIT ONE COPY OF PLAN TO STATE

Operations shall be limited to the work shown in the plan until a revised plan or supplemental plan is submitted covering additional work. Compliance with this plan is not in lieu of compliance with any federal requirements related to the federal Endangered Species Act. If STATE has prepared a required Forest Practices Act (FPA) "Written Plan" for operations, PURCHASER shall comply with all provisions of the Written Plan.

Item No. (from Page 1)

- (5) All sales require you to use a brand furnished by STATE. If the State brand has not been assigned when the plan is submitted, it will be furnished and assigned later. Complete drawing. If more than one brand is assigned to the sale, complete both drawings.
- (6) The contract requires you to have a designated representative available on the sale area or work location who is authorized to receive in your behalf any notice or instruction given by STATE and to take action in regard to performance under the contract. If logging and project work is widely separated, a representative is required for each.
- (7) The STATE representative will be designated when your plan is approved and is the person who will inspect and issue instructions regarding performance.
- (8) Show names of subcontractors to be used for any or all phases of the operations. If subcontractors are not known, or are changed later, give notification to the STATE representative prior to commencement of work by subcontractor.

Show projected dates for commencement of both projects and logging. If projected dates need to be changed at a later date, notification must be given to the STATE representative by supplemental plan or otherwise, prior to commencement of such operations.

- (10) The STATE representative will furnish extra copies of Exhibit A of the contract for your use in preparing the operations map. The map shall use the following legend and show:
 1. Landing locations, approximate setting boundaries, and probable sequence of logging the settings. Number the settings in sequence.
 2. Locations of spur roads planned for construction, other than those required by the timber sale contract. Provide spur road specifications.
 3. Location of proposed tractor yarding roads. Show if and how marked on the ground.
 4. Location of temporary stream crossings.
 5. List the sequence of performing project work.
 6. Location of rock sources - attach pit development plans.



Cable landing, with numbers for sequence.



Tractor landing with alphabetical sequence.



Approximate setting boundary.



Spur truck roads.



Tractor yarding roads.




Temporary stream crossings.

EXHIBIT B
 OPERATIONS PLAN


Completion Timeline

Indicate on the appropriate timeline below, the dates by which you plan to complete the work as required under this contract. The purpose of this section is to develop a plan that will ensure you complete the work as required, and meet the interim completion date(s) and contract expiration date. This plan is incorporated and made a part of the contract. When, in the opinion of STATE, operations are not commencing in a manner that meets the intent of this plan, you may be placed in violation of contract and your operations suspended until an amended plan is submitted and approved by STATE.

Projects

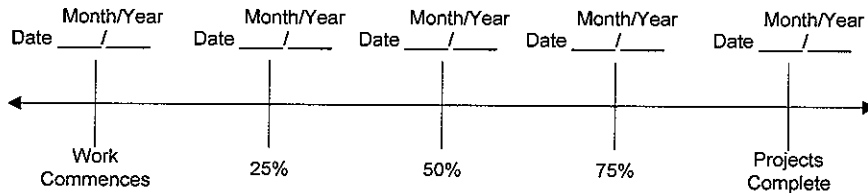

Harvest & Other Requirements

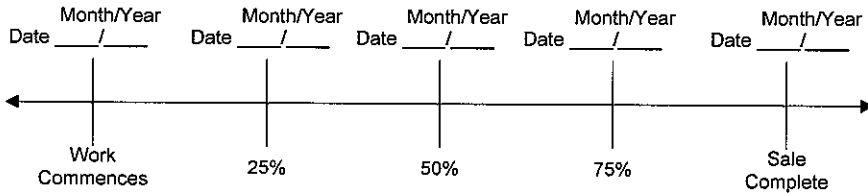

The Federal Endangered Species Act (ESA) prohibits a person from taking any federally listed threatened or endangered species. Taking under the federal ESA may include alteration of habitat. STATE's approval of this plan does not certify that PURCHASER's operation under the plan is lawful under the federal ESA. As provided in the timber sale contract, PURCHASERS must comply with all applicable state, federal, and local laws.

PURCHASER's compliance with this plan is not in lieu of compliance with any federal requirements related to the federal Endangered Species Act.

APPROVED: Date: _____

SUBMITTED BY:
 PURCHASER

STATE OF OREGON - DEPARTMENT OF FORESTRY

 Title _____

 Title _____

Original: Salem
 cc: District File
 Purchaser

EXHIBIT C

SCALING INSTRUCTIONS -- LOCATION APPROVAL -- BRAND INFORMATION

(1) ORIGINAL REGISTRATION Date _____
 REVISION NUMBER _____ Date _____
 CANCELLATION Date _____

(2) TO: _____
 (Third Party Scaling Organization)

(3) FROM: Astoria (04) Phone (503) 325-5451
 (State Forestry District)
 Address 92219 Hwy. 202, Astoria, OR 97103

(4) PURCHASER: _____
 Address _____

(12) SALE NAME Cole Mountain Combo
 COUNTY Clatsop

(13) STATE CONTRACT NUMBER 341-06-38


(14) SCALE: westside eastside cubic foot

(15) STATE BRAND REGISTRATION NUMBER _____

(16) BUREAU BRAND CODE NUMBER _____

(17) STATE BRAND INFORMATION:

(COMPLETE) ↓

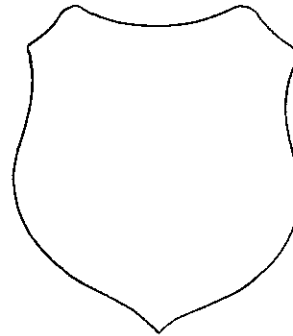

(5) MINIMUM SCALING SPECIFICATIONS			CLASS		
SPECIES	SCALING DIAMETER INCHES	*NET SCALE VOLUME	PER MBF	** SUM	SUB
All Conifers	--	10	X		
All Hardwoods	--	10	X		

* Apply minimum volume test to whole logs over 40' Westside; 20' Eastside.
 ** Sum (if indicated): see instructions and explain in Item (20).

(6) WESTSIDE SCALE: YES NO
 Actual taper all logs over 40' scaling length

(7) EASTSIDE SCALE: YES NO
 *Actual taper butt logs over 40' scaling length

(8) PENCIL BUCK YES NO
 back to Minimum Scaling Diameter _____

(9) ADD-BACK VOLUME -- YES NO
 Deductions due to delay

(18) PAINT REQUIRED: YES
 COLOR Orange

(19) SPECIAL SCALES PEELABLE CULL (all species) UTILITY/PULP (all species) NO DEDUCTIONS ALLOWED FOR MECHANICAL DAMAGE OTHER: _____ OTHER: _____
--

(10) APPROVED SCALING LOCATIONS	Species	Yard	Truck

(20) REMARKS: All hardwood logs shall be scaled as sawlogs unless they meet both of the following requirements: (1) contain less than 20 net board feet, and (2) are smaller than 7 inches in gross scaling diameter. All hardwood logs that meet both requirements shall be scaled as "Utility."

(11) NOTICE OF CANCELLATION OF BRAND:
 Effective Date: _____

Operator's Name (Optional inclusion by District): _____

 State Forester's Representative

(21) SIGNATURES:
 _____ Date
 Purchaser or Authorized Representative

 State Forester Representative Date

Notify the District within one hour when branding or painting is inadequate for quick identification, the receipts are missing, not correctly or completely filled out, and/or when logs presented for scaling are impossible to scale accurately.

EXHIBIT C

INSTRUCTIONS FOR FORM 343-307 (rev. 5/01)

- (1) Check appropriate box. REVISION NUMBER requires comments. CANCELLATION requires Item (21). Complete date.
- (2) Designate Third Party Scaling Organization (TPSO). Send 4 copies to TPSO, 1 to purchaser, 1 to Salem, and keep such copies as to district needs.
- (3) State District office, address and phone.
- (4) Enter Purchaser's business name and address as it appears on the Contract.
- (5) Minimum Scaling Specifications. Review Section 2040 or 2045, "Log Removal," of the Contract. Species, or combined species can be separate entries. Information serves as a basis for scaling (see also Items (13) thru (17)), and is required to show existence on the sale. **PerM** (per MBF). **SUM** (lump sum material). **SUB** (submerchantable material. SUB, as used by the State, references that material containing at least 10 bf (net) but less than the lower merchantable net volume limit or grade requirements for other merchantable (PerM) entries. PerM, SUM, and Sub must be indicated by checking the appropriate column. Species with the same specifications and value are combined into one entry. PerM and Sub require scaling therefore complete specifications. SUM need not be scaled, hence no specifications. Loads containing only SUM are to be ticketed if so instructed in Item (19). Mixed loads of SUM, PERM and/or subspecies will always be scaled.
- (6) Westside -- actual taper segment scale. Check Yes or No. Special Service Rules on file with TPSO. See: Segment Scaling and Grading of Long Logs -- All Species -- State Forestry Department Scaling Practices (Westside).
- (7) Eastside -- actual taper/taper table segment scale. Special Service Rules on file with TPSO. See: Segment Scaling and Grading of Long Logs -- All Species -- State Forestry Department Scaling Practices (Eastside). Items with * follow U.S. Forest Service Eastside rules.
- (8) Pencil Buck. Check NO if a westside sale, optional for eastside sales.
- (9) Add-Back Volume. Add-Back is normally checked YES. Scaler records deductions (sap rot, weather checks, etc.) caused by an abnormal delay in removal. Enter separately on scale ticket. TPSO provides State with summaries that include this as a net volume by species. Salvage sales and certain other circumstances may require that "NO" be checked.
- (10) Show scaling locations only applicable to TPSO. Not necessary to list markets. If all species are scaled at same location, enter "ALL."
- (11) When logging is complete, recall branding hammers, date and sign where indicated, check CANCELLATION box at top of form, and send to TPSO.
- (12) Enter sale name and county.
- (13) Enter sale Contract number.
- (14) Check Westside or Eastside log scale. Cubic foot refers to Northwest Log Rules Cubic Foot Scale.
- (15) Oregon Forest Products Brand Registry Number (optional).
- (16) DO NOT USE -- TPSO will fill in when applicable.
- (17) Show one brand only. Complete drawing. If more than one brand is assigned to the sale, (1) make separate form for each brand, and (2) on each form, explain and show other brand(s) under REMARKS, Item 19.
- (18) Check YES and designate orange.
- (19) Special Scales. These are the Special Scales that will be applied. If "Other" is indicated, please describe. Give comments in Item (19).
- (20) Use this space to designate weight conversion factors, or any other explanations to clarify scaling requirements. If additional scaling locations are approved, prepare another form showing all (old and new) locations. Check REVISION box at top of form and explain under remarks. Route as indicated.
- (21) Require purchaser to sign and date completed form.

EXHIBIT D
 FOREST ROAD SPECIFICATIONS

SUBGRADE WIDTH	SURFACED WIDTH	POINT TO POINT	STATION TO STATION	DRAINAGE
16 feet	12 feet	1A to 1B	0+00 to 28+15	DITCH
16 feet	12 feet	1C to 1D	0+00 to 44+75	DITCH
16 feet	12 feet	1E to 1F	0+00 to 8+65	DITCH
16 feet	12 feet	1I to 1J	0+00 to 2+10	DITCH
16 feet	12 feet	1K to 1L	0+00 to 6+20	DITCH
16 feet	12 feet	2A to 2B	0+00 to 3+65	DITCH
14 feet	None	3A to 3B	0+00 to 1+50	OUTSLOPE
14 feet	None	3C to 3D	0+00 to 7+60	OUTSLOPE
16 feet	12 feet	4A to 4B	0+00 to 7+30	DITCH
14 feet	None	4A to 4B	7+30 to 19+75	OUTSLOPE
14 feet	None	4C to 4D	0+00 to 2+00	OUTSLOPE
16 feet	12 feet	5A to 5B	0+00 to 5+85	DITCH
16 feet	12 feet	5D to 5E	0+00 to 1+10	DITCH
16 feet	12 feet	5F to 5G	0+00 to 5+70	DITCH
16 feet	12 feet	6A to 6B	0+00 to 16+40	DITCH
16 feet	12 feet	6C to 6D	0+00 to 36+15	DITCH
16 feet	12 feet	6E to 6F	0+00 to 5+65	DITCH
16 feet	12 feet	6G to 6H	0+00 to 2+60	DITCH
16 feet	12 feet	6I to 6J	0+00 to 9+00	DITCH
16 feet	12 feet	6K to 6L	0+00 to 14+80	DITCH
16 feet	12 feet	6M to 6N	0+00 to 1+85	DITCH
16 feet	12 feet	6O to 6P	0+00 to 3+80	DITCH
16 feet	12 feet	I1 to I2	0+00 to 30+50	DITCH
16 feet	12 feet	I3 to I4	0+00 to 10+00	DITCH
16 feet	12 feet	I5 to I6	0+00 to 4+50	DITCH
16 feet	12 feet	I7 to I8	0+00 to 9+10	DITCH
16 feet	12 feet	I9 to I10	0+00 to 32+50	DITCH
16 feet	12 feet	I11 to I12	0+00 to 5+89	DITCH

EXHIBIT D

FOREST ROAD SPECIFICATIONS

CLEARING. This work shall consist of clearing, removing, and disposing of all trees, snags, down timber, brush, surface objects, and protruding obstructions within the clearing limits.

Where clearing limits have not been marked or stacked, the clearing limits shall extend 5 feet back of the top of the cutslope and 5 feet out from the toe of the fill slope, or as directed by STATE. Clearing debris shall not be placed or permitted to remain in or under any road embankment sections. Clearing debris shall not be left lodged against standing trees.

All danger trees, leaners, and snags outside the clearing limits which could fall and hit the road shall be felled.

GRUBBING. This work shall consist of the removal or digging out of stumps and protruding objects. All stumps shall be completely removed within the limits of required grubbing. Stumps overhanging cutslopes shall be removed. Grubbing debris shall not be placed or Permitted to remain in or under any road embankment sections.

GRUBBING CLASSIFICATION. New Construction – From the top of the cutslope to the toe of the fill. Improvement and reconstruction – four feet back from the shoulder of the subgrade or ditch, whichever is widest, or as marked in the field.

CLEARING AND GRUBBING DISPOSAL. Scatter through openings in the timber outside of the cleared right-of-way, except areas where end-haul is required. In areas where end-haul is required, clearing and grubbing debris shall be fully contained and hauled to a designated waste area. Grubbing debris shall not be left lodged against standing trees and shall be left in a stable location.

EXCAVATION. Excavation and grading shall not be done when weather and/or ground conditions are such that damage will result to existing subgrade or cause excessive erosion.

Excavation shall conform to STATE-engineered lines, grades, dimensions, and plans when provided.

All suitable excavated material shall be used where possible for the formation of fills, shoulders, and drainage structure backfills. Embankment materials shall be free of woody debris, brush, muck, sod, frozen material, and other deleterious materials. All fills and drainage structure backfills shall be machine compacted according to the specifications in Exhibit D.

Unless road design plans show otherwise, all roads shall be on a balanced cross section, except when the slope is over 50 percent, the road shall be on full bench for the width specified.

Excess excavation shall not be sidecast where material will enter a stream course or where material will accumulate in areas deemed a high landslide hazard location by STATE.

EXHIBIT D
FOREST ROAD SPECIFICATIONS

ROAD WIDTH LIMITATIONS. PURCHASER shall obtain advance written approval from STATE to construct the road to a greater width than specified. Extra subgrade width shall be required for:

Fill Widening. Add to each fill shoulder 1 foot for fills 3 feet to 6 feet high; 2 feet for fills over 6 feet high.

Curve Widening. Widen the inside shoulder of all curves as follows: 400 divided by the radius of the curve equals the amount of extra width.

DRAINAGE.

SUBGRADE: Subgrade shall be crowned at 4 to 6 percent.

Ditchout. Construct ditchouts away from subgrade at locations marked in the field.

Ditch. Construct "V" ditch 3 feet wide and to a depth of 1 foot below subgrade.

Outslope. Road subgrade shall be outsloped at 4 to 6 percent (1/2 inch per foot in width).

TURNOUTS. Increase roadbed width an additional 8 feet for both subgrade and surfacing. Length shall be at least 50 feet, or as staked on the ground, plus 25-foot approaches at each end.

Location: Intervisible but not greater than 750 feet apart and as marked in the field.

GRADING

	<u>Back Slopes</u>	<u>Fill Slopes</u>
Rock	Vertical to 1/4:1	Not steeper
Common - side slopes 50% and over	3/4:1	than 1½:1
Common - side slopes less than 50%	1:1	
Common - turnpike (level) section	2:1	

Top of cutslope shall be rounded.

LANDINGS. Landings shall be constructed as posted in the field, no less than 50 feet wide and no more than 70 feet wide. Surface is to be crowned for drainage, with general grade no more than 3 percent. Surface as shown on Exhibit D.

TURNAROUNDS. Increase subgrade width an additional 20 feet for a length of 20 feet at locations marked in the field.

SEASONAL WINTERIZATION. All unrocked roads or unfinished subgrades shall be waterbarred in accordance with Specifications in Exhibit J, and blocked from vehicular traffic prior to November 1, annually and as directed by STATE.

GENERAL ROAD CONSTRUCTION INSTRUCTIONS:

- (1) Excavated Materials. Excavated materials shall be utilized for road construction and hauled in where necessary. Surplus excavation materials shall be hauled to the waste areas as marked in the field and/or designated on Exhibit A. For segment 2A to 2B, all excavated material shall hauled to the Cole Mountain Quarry and wasted. Surplus excavated materials and waste materials shall be sloped and compacted for drainage. Fills shall be thoroughly compacted in accordance with Exhibit D.
- (2) Fill Armor and Energy Dissipator Construction. Where rock is specified for fill armor, rock shall be placed and tamped at a 1½:1 slope, beginning at the fill toes. Where rock is used for an energy dissipator, rock shall be placed below the culvert outlet and embedded for a minimum of 3 feet, in accordance with Exhibit I.

EXHIBIT D
FOREST ROAD SPECIFICATIONS

- (3) Fill Material. For segment 2A to 2B, utilize quarry reject material, located at the Cole Mountain Quarry, to construct fill and approaches to the existing road grades, as directed by STATE.
- (4) Geotextile Road Fabric: Install woven fabric from 0+00 to 37+00 on 1C to 1D, from 0+00 to 7+30 on 4A to 4B, on 5A to 5B, 5F to 5G, 6A to 6B, 6C to 6D, 6I to 6J, and 6K to 6L in accordance with the specifications in Exhibit L.

SPECIFIC ROAD CONSTRUCTION INSTRUCTIONS:

<u>Segment</u>	<u>Station</u>	<u>Work Description</u>
1C to 1D	14+30	Beginning of end-haul segment.
	20+85	End of end-haul segment.
	22+80	Beginning of end-haul segment.
	28+70	End of end-haul segment.
2A to 2B	1+50	Utilize 355 cubic yards of rejected rock material from the Cole Mountain Stockpile Site to construct fill and road approaches, as directed by STATE.
6A to 6B	12+66	Property Line. Install the gate removed from V2 to V3 near this location, as directed by STATE.
6C to 6D	32+30	Beginning of end-haul segment.
	34+55	End of end-haul segment.
6K to 6L	1+55	Beginning of end-haul segment.
	4+55	End of end-haul segment.

EXHIBIT D

FOREST ROAD SPECIFICATIONS

GENERAL ROAD IMPROVEMENT INSTRUCTIONS:

- 1) Timber Removal. Remove all trees within posted Right of Way Boundary or individually marked with an orange "C," as specified in Section 2210, Designated Timber.
- 2) Excavated Materials. Excavated materials shall be utilized for road and fill construction and hauled in where necessary. Surplus excavation materials shall be hauled to the waste areas as marked in the field and/or designated on Exhibit A. Waste materials shall be sloped and compacted for drainage.
- 3) Culvert Replacement, Culvert Installation, Fill Reconstruction, and Fill Removal. Existing culvert geometry shall be modified to provide for optimum drainage and culvert performance. Modifications may include, skewing the culvert and/or installing the pipe at gradients equal to or exceeding the drainage (or ditch) gradient. Where fill reconstruction or culvert replacement is specified, fills shall be excavated to natural stream course levels. All woody debris encountered during fill excavation shall be removed. All waste materials shall be hauled to nearby waste areas and shall be uniformly sloped and compacted for drainage. Waste materials shall be seeded and mulched in accordance with specifications in Exhibit M. Fill reconstruction backfill shall consist of select materials and may be obtained from borrow pits, as directed by STATE. Backfill materials shall be hauled in where necessary and thoroughly compacted in accordance with Exhibit D. Crushed rock shall be used for backfilling excavation trenches less than 3 feet deep. STATE may require the use of crushed rock for culvert bedding. Removed culverts shall be hauled to an approved refuse site off of STATE land.
- 4) Additional Requirements for Type F Stream Fill Construction. Additional requirements are indicated on Exhibit H.
- 5) Drainage Ditches. Restore or construct ditchlines, including ditchouts, as directed by STATE. Clean out all culvert inlets and outlets for a 10-foot radius. Re-establish or construct culvert sediment basins. Waste materials from drainage ditches and sediment basins shall not be pulled across existing surfacing rock, but shall be placed in nearby waste areas and uniformly sloped and compacted for drainage, as directed by STATE. Damaged culvert inlets and/or outlets shall be repaired by opening them with a hydraulic jack, or cutting off the culvert end to allow for free passage of water at peak flow levels. Install a culvert marker at each newly installed culvert and at each existing culvert that is missing a marker that could be reached by a grader blade. Markers shall meet specifications in Exhibit E.
- 6) Riprap Rock Use. Where rock is specified for fill armor, rock shall be placed and tamped at a 1½:1 slope, beginning at the fill toes. Where rock is used for an energy dissipator, rock shall be placed below the culvert outlet and embedded for a minimum of 3 feet, as specified in Exhibit I.
- 7) Settling Ponds and Ditch Armoring. Construct settling ponds as directed by STATE. Excavated material shall be hauled to the designated waste areas as marked in the field and/or designated on Exhibit A. Waste materials shall be sloped and compacted for drainage. Settling pond dimensions shall be a finished top diameter of 8 feet, bottom diameter of 4 feet and 3 feet in depth, to the top of the pond armor rock or as directed by STATE. Backslopes shall be ¾:1. Ditchline armor and settling pond armor shall be 8 inches deep.
- 8) Equipment. All excavation, riprap placement, and sidecast pullback shall be performed using a minimum 1½ cubic yard, track-mounted excavator.

EXHIBIT D
FOREST ROAD SPECIFICATIONS

GENERAL ROAD IMPROVEMENT INSTRUCTIONS:

- 9) Subgrade Preparation and Application of New Surfacing Rock.
- (a) Complete culvert installations, fill reconstructions, and other specified work prior to the application of new surfacing rock.
 - (b) Cut out all chuckholed and/or washboarded sections from the existing surfacing.
 - (c) Apply required base and leveling rock, as directed by STATE.
 - (d) Process (grade and mix) the existing surface and added base rock. Provide for a crown of ½ inch per foot in road width (4 to 6 percent), and compact in accordance to Exhibit D.
 - (e) Upon completion of above required work, apply, process, and compact surfacing rock in accordance to Exhibit D.

SPECIFIC ROAD IMPROVEMENT INSTRUCTIONS:

<u>Segment</u>	<u>Station</u>	<u>Work Description</u>
I1 to I2	11+45	Install Culvert Marker.
	15+75	Install Culvert Marker.
	26+25	Install Culvert Marker.
	28+50	Install Culvert Marker.
I5 to I6	3+50	Install Culvert. Utilize 30 cubic yards of 1 ½"-0" crushed rock, for bedding and backfill rock.
I9 to I10	0+50	Install Culvert Marker.
	5+15	Install Culvert. Utilize 30 cubic yards of 1 ½"-0" crushed rock, for bedding and backfill rock.
	23+50	Construct Ditch Out Left.
I11 to I12	3+65	Begin armoring ditchline with 4"-0" crushed rock material according to Exhibit D and as directed by STATE.
	3+90	Construct Settling Pond according to Exhibits D and H and as directed by STATE. End ditch armoring.
	4+15	Type F Stream Fill and Culvert Installation. Fill reconstruction and Culvert replacement. Install Type F crossing in accordance with Exhibit H.
	4+65	Construct Settling Pond according to Exhibits D and H, and as directed by STATE. Begin armoring ditchline with 4"-0" crushed rock.
	4+90	End armoring ditchline.

EXHIBIT D
 END-HAULING REQUIREMENTS

POINT TO POINT	STA. TO STA.	CONTAINMENT	WASTE AREA LOCATION	WASTE AREA TREATMENT
1C to 1D	12+85 to 14+30	2	1a	4
1C to 1D	14+30 to 20+85	1	2	1, 2, and 3
1C to 1D	22+80 to 28+70	1	1b and 3	1, 2, and 3
2A to 2B	0+00 to 3+65	2	4	1, 2, and 3
5A to 5B	0+00 to 2+45	2	1c	4
5F to 5G	5+30 to 6+70	2	1d	4
6C to 6D	15+00 to 20+20	2	1e	4
6C to 6D	32+30 to 34+55	1	5	1, 2, and 3
6K to 6L	1+55 to 4+55	1	1	4

End-Haul Areas General Requirements

Material shall not be intentionally side cast.

Clearing and grubbing debris shall be end-hauled.

When blasting is required, it shall be accomplished using timing devices, delayed charges, low intensity shots, or other suitable means to contain as much material as possible within the road prism.

Containment

- (1) Full containment: The amount of material lost over the outside edge of the road shall not exceed 6 inches in depth measured perpendicular to the natural ground slope. Pioneer excavation shall be removed by digging, loading, and hauling rather than by pushing or scraping methods.
- (2) Average containment: The amount of material lost over the outside edge of the road shall not exceed 12 inches in depth measured perpendicular to the natural ground slope, unless this is a balance road segment.

Trees and stumps may have up to 12 inches of material directly above them. Any amount of material exceeding the containment requirements shall be removed by whatever means necessary and end-hauled to a designated waste area.

EXHIBIT D
END-HAULING REQUIREMENTS

Waste Area Location

- (1) Utilize suitable material where needed along road segment near these locations:
 - (a) 1C to 1D. Utilize material between 0+00 to 1+75 and 7+50 to 11+00
 - (b) 1C to 1D. Utilize material between 6+25 to 7+55 on 1E to 1F.
 - (c) 5A to 5B. Utilize material at 3+00 (landing) on 5A to 5B.
 - (d) 5F to 5G. Utilize material between 0+00 to 4+00 on 5F to 5G.
 - (e) 6C to 6D. Utilize material between 0+50 to 13+30 on 6C to 6D.
- (2) As shown on Exhibit A and as marked in the field near Station 4+70 on 1C to 1D.
- (3) As shown on Exhibit A and as marked in the field near Station 21+60 on 1C to 1D.
- (4) As shown on Exhibit A as Cole Mountain Quarry.
- (5) As shown on Exhibit A and as marked in the field near Station 26+80 on 6C to 6D.

Waste Area Treatment

- (1) Deposit at waste area, spread evenly, compact, and provide adequate drainage.
- (2) Pile woody debris separate from other waste material.
- (3) Mulch and seed all waste areas in accordance with Exhibit M.
- (4) Utilize suitable material only for fill construction and compact in accordance with Exhibit D.

EXHIBIT D
 ROAD SURFACING

ROAD SEGMENT	1A to 1B			POINT TO POINT		Sta. to Sta.		TOTAL VOLUME (CY)
Application	Rock Size and Type	Location	Depth of Rock (inches)	1A to 1B		0+00 to 28+15		
				Volume (CY) per	Number of			
Base Rock	4"-0" Crushed	0+00 to 28+15	10	Station	63	Stations	28.15	1773
Turnouts	4"-0" Crushed	5+20, 12+50, 21+90	10	Turnout	28	Turnouts	3	84
Curve Widening	4"-0" Crushed	3+45 to 6+85	10	Curve	51	Curve	1	51
Curve Widening	4"-0" Crushed	15+00 to 18+85	10	Curve	57	Curve	1	57
Curve Widening	4"-0" Crushed	22+75 to 24+90	10	Curve	22	Curve	1	22
Curve Widening	4"-0" Crushed	24+70 to 26+75	10	Curve	20	Curve	1	20
Junction	4"-0" Crushed	17+20 (1C)	10	Junction	20	Junctions	1	20
Surface Rock	1 1/2"-0" Crushed	0+00 to 28+15	4	Station	25	Stations	28.15	704
Turnouts	1 1/2"-0" Crushed	5+20, 12+50, 21+90	4	Turnout	11	Turnouts	3	33
Curve Widening	1 1/2"-0" Crushed	3+45 to 6+85	4	Curve	20	Curve	1	20
Curve Widening	1 1/2"-0" Crushed	15+00 to 18+85	4	Curve	23	Curve	1	23
Curve Widening	1 1/2"-0" Crushed	22+75 to 24+90	4	Curve	9	Curve	1	9
Curve Widening	1 1/2"-0" Crushed	24+70 to 26+75	4	Curve	9	Curve	1	9
Junction	1 1/2"-0" Crushed	17+20 (1C)	4	Junction	10	Junctions	1	10
Dissipator Rock	24"-6" Riprap	0+00, 7+70, 10+55, 21+55, 24+80		Dissipator	20	Dissipators	5	100
Total Rock for Road Segment: 1A to 1B								2935
ROAD SEGMENT	1C to 1D			POINT TO POINT		Sta. to Sta.		TOTAL VOLUME (CY)
Application	Rock Size and Type	Location	Depth of Rock (inches)	1C to 1D		0+00 to 44+75		
				Volume (CY) per	Number of			
Base Rock	4"-0" Crushed	0+00 to 44+75	8	Station	50	Stations	44.75	2238
Turnouts	4"-0" Crushed	3+25, 5+80, 15+55, 31+20, 35+50, 40+85	8	Turnout	22	Turnouts	6	132
Curve Widening	4"-0" Crushed	1+15 to 2+30	8	Curve	10	Curve	1	10
Curve Widening	4"-0" Crushed	4+35 to 6+05	8	Curve	22	Curve	1	22
Curve Widening	4"-0" Crushed	12+60 to 14+40	8	Curve	46	Curve	1	46
Curve Widening	4"-0" Crushed	15+35 to 15+95	8	Curve	10	Curve	1	10
Curve Widening	4"-0" Crushed	21+20 to 22+50	8	Curve	33	Curve	1	33
Junctions	4"-0" Crushed	21+60, 29+60, 36+50	8	Junction	25	Junctions	3	75
Surface Rock	1 1/2"-0" Crushed	0+00 to 29+60	3	Station	19	Stations	29.60	562
Turnouts	1 1/2"-0" Crushed	5+20, 12+50, 21+90	3	Turnout	11	Turnouts	3	33
Curve Widening	1 1/2"-0" Crushed	1+15 to 2+30	3	Curve	5	Curve	1	5
Curve Widening	1 1/2"-0" Crushed	4+35 to 6+05	3	Curve	8	Curve	1	8
Curve Widening	1 1/2"-0" Crushed	12+60 to 14+40	3	Curve	18	Curve	1	18
Curve Widening	1 1/2"-0" Crushed	15+35 to 15+95	3	Curve	5	Curve	1	5
Curve Widening	1 1/2"-0" Crushed	21+20 to 22+50	3	Curve	13	Curve	1	13
Junctions	1 1/2"-0" Crushed	21+60, 29+60,	3	Junction	11	Junctions	2	22

EXHIBIT D

ROAD SURFACING

ROAD SEGMENT	1C to 1D continued			POINT TO POINT		Sta. to Sta.		TOTAL VOLUME (CY)
Application	Rock Size and Type	Location	Depth of Rock (inches)	1C to 1D		0+00 to 44+75		
				Volume (CY) per		Number of		
Dissipator Rock	24"-6" Riprap	15+05, 20+65, 23+50		Dissipator	20	Dissipators	3	60
Landings	6"-0" Pit-run	44+75		Landing	50	Landings	1	50
Total Rock for Road Segment:				1C to 1D				3342
ROAD SEGMENT	1E to 1F			POINT TO POINT		Sta. to Sta.		TOTAL VOLUME (CY)
Application	Rock Size and Type	Location	Depth of Rock (inches)	1E to 1F		0+00 to 8+65		
				Volume (CY) per		Number of		
Base Rock	4"-0" Crushed	0+00 to 8+65	8	Station	50	Stations	8.65	433
Turnouts	4"-0" Crushed	3+80	8	Turnout	22	Turnouts	1	22
Curve Widening	4"-0" Crushed	3+05 to 4+90	8	Curve	23	Curve	1	23
Turnaround	4"-0" Crushed	6+10	8	Turnaround	20	Turnarounds	1	20
Landings	6"-0" Pit-run	8+65		Landing	50	Landings	1	50
Total Rock for Road Segment:				1E to 1D				548
ROAD SEGMENT	1I to 1J			POINT TO POINT		Sta. to Sta.		TOTAL VOLUME (CY)
Application	Rock Size and Type	Location	Depth of Rock (inches)	1I to 1J		0+00 to 2+10		
				Volume (CY) per		Number of		
Base Rock	4"-0" Crushed	0+00 to 2+10	8	Station	50	Stations	2.10	105
Landings	6"-0" Pit-run	2+10		Landing	50	Landings	1	50
Total Rock for Road Segment:				1I to 1J				155
ROAD SEGMENT	1K to 1L			POINT TO POINT		Sta. to Sta.		TOTAL VOLUME (CY)
Application	Rock Size and Type	Location	Depth of Rock (inches)	1K to 1L		0+00 to 6+20		
				Volume (CY) per		Number of		
Base Rock	4"-0" Crushed	0+00 to 8+65	8	Station	50	Stations	6.2	310
Curve Widening	4"-0" Crushed	0+00 to 1+80	8	Curve	22	Curve	1	22
Dissipator Rock	24"-6" Riprap	3+90		Dissipator	20	Dissipator	1	20
Landings	6"-0" Pit-run	4+20, 6+20		Landing	50	Landings	2	100
Total Rock for Road Segment:				1K to 1L				452
ROAD SEGMENT	2A to 2B			POINT TO POINT		Sta. to Sta.		TOTAL VOLUME (CY)
Application	Rock Size and Type	Location	Depth of Rock (inches)	2A to 2B		0+00 to 3+65		
				Volume (CY) per		Number of		
Base Rock	4"-0" Crushed	0+00 to 3+65	10	Station	63	Stations	3.65	230
Curve Widening	4"-0" Crushed	0+00 to 1+80	10	Curve	42	Curve	1	42
Curve Widening	4"-0" Crushed	2+10 to 3+35	10	Curve	39	Curve	1	39
Junction	4"-0" Crushed	1+30	10	Junction	250	Junctions	1	250
Surface Rock	1 1/2"-0" Crushed	0+00 to 3+65	4	Station	25	Stations	3.65	91
Curve Widening	1 1/2"-0" Crushed	0+00 to 1+80	4	Curve	17	Curve	1	17
Curve Widening	1 1/2"-0" Crushed	2+10 to 3+35	4	Curve	12	Curve	1	12
Junction	1 1/2"-0" Crushed	1+30	4	Junction	100	Junctions	1	100
Total Rock for Road Segment:				2A to 2B				781

EXHIBIT D

ROAD SURFACING

ROAD SEGMENT	3A to 3B			POINT TO POINT		Sta. to Sta.		TOTAL VOLUME (CY)
Application	Rock Size and Type	Location	Depth of Rock (inches)	3A to 3B		0+00 to 7+60		
				Volume (CY) per	Number of			
Junction	4"-0" Crushed	0+00	8	Junction	30	Junctions	1	30
Junction	1 1/2"-0" Crushed	0+00	3	Junction	11	Junctions	1	11
Total Rock for Road Segment:				3A to 3B				41
ROAD SEGMENT	3C to 3D			POINT TO POINT		Sta. to Sta.		TOTAL VOLUME (CY)
Application	Rock Size and Type	Location	Depth of Rock (inches)	3C to 3D		0+00 to 7+60		
				Volume (CY) per	Number of			
Junction	4"-0" Crushed	0+00	8	Junction	30	Junctions	1	30
Junction	1 1/2"-0" Crushed	0+00	3	Junction	11	Junctions	1	11
Subgrade Reinforcement	6"-0" Pit-run	2+75 to 4+50	n/a	N/A		N/A		100
Total Rock for Road Segment:				3C to 3D				141
ROAD SEGMENT	4A to 4B			POINT TO POINT		Sta. to Sta.		TOTAL VOLUME (CY)
Application	Rock Size and Type	Location	Depth of Rock (inches)	4A to 4B		0+00 to 7+30		
				Volume (CY) per	Number of			
Base Rock	4"-0" Crushed	0+00 to 7+30	8	Station	50	Stations	7.30	365
Junction	4"-0" Crushed	0+00	8	Junction	25	Junctions	1	25
Junction	1 1/2"-0" Crushed	0+00	3	Junction	11	Junctions	1	11
Landings	6"-0" Pit-run	7+30		Landing	50	Landings	1	50
Total Rock for Road Segment:				4A to 4B				451
ROAD SEGMENT	5A to 5B			POINT TO POINT		Sta. to Sta.		TOTAL VOLUME (CY)
Application	Rock Size and Type	Location	Depth of Rock (inches)	5A to 5B		0+00 to 5+85		
				Volume (CY) per	Number of			
Base Rock	4"-0" Crushed	0+00 to 5+85	8	Station	50	Stations	5.85	293
Curve Widening	4"-0" Crushed	2+75 to 3+50	8	Curve	20	Curve	1	20
Junction	4"-0" Crushed	0+00	8	Junction	25	Junctions	1	25
Junction	1 1/2"-0" Crushed	0+00	3	Junction	11	Junctions	1	11
Dissipator Rock	24"-6" Riprap	1+00		Dissipator	20	Dissipators	1	20
Landings	6"-0" Pit-run	3+00, 5+85		Landing	50	Landings	2	100
Total Rock for Road Segment:				5A to 5B				469
ROAD SEGMENT	5C			POINT TO POINT		Sta. to Sta.		TOTAL VOLUME (CY)
Application	Rock Size and Type	Location	Depth of Rock (inches)	5C		0+00		
				Volume (CY) per	Number of			
Culvert Bedding/Surface	1 1/2"-0" Crushed	0+00	4	Culvert	30	Culvert	1	30
Dissipator Rock	24"-6" Riprap	0+00		Dissipator	20	Dissipators	1	20
Landings	6"-0" Pit-run	0+00		Landing	50	Landings	1	50
Total Rock for Road Segment:				5C				100

EXHIBIT D

ROAD SURFACING

ROAD SEGMENT	5D to 5E			POINT TO POINT		Sta. to Sta.		TOTAL VOLUME (CY)
Application	Rock Size and Type	Location	Depth of Rock	5D to 5E		0+00 to 1+10		
			(inches)	Volume (CY) per	Number of			
Base Rock	4"-0" Crushed	0+00 to 1+10	8	Station	50	Stations	1.10	55
Landings	6"-0" Pit-run	1+10		Landing	50	Landings	1	50
Total Rock for Road Segment:				5D to 5E				105
ROAD SEGMENT	5F to 5G			POINT TO POINT		Sta. to Sta.		TOTAL VOLUME (CY)
Application	Rock Size and Type	Location	Depth of Rock	5F to 5G		0+00 to 5+70		
			(inches)	Volume (CY) per	Number of			
Base Rock	4"-0" Crushed	0+00 to 5+70	8	Station	50	Stations	5.7	285
Junction	4"-0" Crushed	0+30, 0+85	8	Junction	25	Junctions	2	50
Landings	6"-0" Pit-run	3+10, 5+70		Landing	50	Landings	2	100
Total Rock for Road Segment:				5F to 5G				435
ROAD SEGMENT	6A to 6B			POINT TO POINT		Sta. to Sta.		TOTAL VOLUME (CY)
Application	Rock Size and Type	Location	Depth of Rock	6A to 6B		0+00 to 16+40		
			(inches)	Volume (CY) per	Number of			
Base Rock	4"-0" Crushed	0+00 to 16+40	8	Station	50	Stations	16.40	820
Turnouts	4"-0" Crushed	10+15, 15+40	8	Turnout	22	Turnouts	2	44
Curve Widening	4"-0" Crushed	0+65 to 2+45	8	Curve	22	Curve	1	22
Curve Widening	4"-0" Crushed	9+05 to 11+05	8	Curve	25	Curve	1	25
Curve Widening	4"-0" Crushed	12+85 to 14+25	8	Curve	18	Curve	1	18
Surface Rock	1 1/2"-0" Crushed	0+00 to 16+40	4	Station	25	Stations	16.40	410
Turnouts	1 1/2"-0" Crushed	10+15, 15+40	4	Turnout	11	Turnouts	2	22
Curve Widening	1 1/2"-0" Crushed	0+65 to 2+45	4	Curve	11	Curve	1	11
Curve Widening	1 1/2"-0" Crushed	9+05 to 11+05	4	Curve	12	Curve	1	12
Curve Widening	1 1/2"-0" Crushed	12+85 to 14+25	4	Curve	9	Curve	1	9
Dissipator Rock	24"-6" Riprap	12+55		Dissipator	20	Dissipators	1	20
Total Rock for Road Segment:				5F to 5G				1413
ROAD SEGMENT	6C to 6D			POINT TO POINT		Sta. to Sta.		TOTAL VOLUME (CY)
Application	Rock Size and Type	Location	Depth of Rock	6C to 6D		0+00 to 36+15		
			(inches)	Volume (CY) per	Number of			
Base Rock	4"-0" Crushed	0+00 to 36+15	8	Station	50	Stations	36.15	1808
Turnouts	4"-0" Crushed	17+80, 22+80,	8	Turnout	22	Turnouts	2	44
Junction	4"-0" Crushed	25+50	8	Junction	25	Junctions	1	25
Surface Rock	1 1/2"-0" Crushed	0+00 to 25+50	3	Station	19	Stations	25.5	484
Turnouts	1 1/2"-0" Crushed	17+80, 22+80,	3	Turnout	11	Turnouts	2	22
Junction	1 1/2"-0" Crushed	25+50	3	Junction	11	Junctions	1	11
Dissipator Rock	24"-6" Riprap	14+30,20+30,30+47		Dissipator	20	Dissipators	3	60
Landings	6"-0" Pit-run	9+00, 36+15		Landing	50	Landings	2	100
Total Rock for Road Segment:				6C to 6D				2554

EXHIBIT D
 ROAD SURFACING

ROAD SEGMENT	6E to 6F			POINT TO POINT		Sta. to Sta.		TOTAL VOLUME (CY)
Application	Rock Size and Type	Location	Depth of Rock (inches)	6E to 6F		0+00 to 5+65		
				Volume (CY) per		Number of		
Base Rock	4"-0" Crushed	0+00 to 5+65	8	Station	50	Stations	5.65	283
Junction	4"-0" Crushed	4+00	8	Junction	25	Junctions	1	25
Landings	6"-0" Pit-run	5+65		Landing	50	Landings	1	50
Total Rock for Road Segment:				6E to 6F				358
ROAD SEGMENT	6G to 6H			POINT TO POINT		Sta. to Sta.		TOTAL VOLUME (CY)
Application	Rock Size and Type	Location	Depth of Rock (inches)	6G to 6H		0+00 to 2+60		
				Volume (CY) per		Number of		
Base Rock	4"-0" Crushed	0+00 to 2+60	8	Station	50	Stations	2.60	130
Landings	6"-0" Pit-run	2+60		Landing	50	Landings	1	50
Total Rock for Road Segment:				6E to 6F				180
ROAD SEGMENT	6I to 6J			POINT TO POINT		Sta. to Sta.		TOTAL VOLUME (CY)
Application	Rock Size and Type	Location	Depth of Rock (inches)	6I to 6J		0+00 to 9+00		
				Volume (CY) per		Number of		
Base Rock	4"-0" Crushed	0+00 to 5+65	8	Station	50	Stations	9.0	450
Junction	4"-0" Crushed	0+00	8	Junction	25	Junctions	1	25
Turnaround	4"-0" Crushed	6+60	8	Turnaround	20	Turnarounds	1	20
Junction	1 1/2"-0" Crushed	0+00	4	Junction	11	Junctions	1	11
Landings	6"-0" Pit-run	7+50, 9+00		Landing	50	Landings	2	100
Total Rock for Road Segment:				6I to 6J				606
ROAD SEGMENT	6K to 6L			POINT TO POINT		Sta. to Sta.		TOTAL VOLUME (CY)
Application	Rock Size and Type	Location	Depth of Rock (inches)	6K to 6L		0+00 to 14+80		
				Volume (CY) per		Number of		
Base Rock	4"-0" Crushed	0+00 to 14+80	8	Station	50	Stations	14.8	740
Turnout	4"-0" Crushed	7+65	8	Turnout	22	Turnout	1	22
Curve Widening	4"-0" Crushed	6+15 to 7+30	8	Curve	20	Curve	1	20
Curve Widening	4"-0" Crushed	8+10 to 9+55	8	Curve	30	Curve	1	30
Junction	4"-0" Crushed	10+40	8	Junction	30	Junctions	1	30
Surface Rock	1 1/2"-0" Crushed	0+00 to 10+40	3	Station	19	Stations	10.40	198
Turnout	1 1/2"-0" Crushed	7+65	3	Turnout	10	Turnout	1	10
Curve Widening	1 1/2"-0" Crushed	6+15 to 7+30	3	Curve	10	Curve	1	10
Curve Widening	1 1/2"-0" Crushed	8+10 to 9+55	3	Curve	15	Curve	1	15
Junction	1 1/2"-0" Crushed	10+40	3	Junction	22	Junctions	1	22
Dissipator Rock	24"-6" Riprap	3+90		Dissipator	20	Dissipators	1	20
Landings	6"-0" Pit-run	14+80		Landing	50	Landings	1	50
Total Rock for Road Segment:				6I to 6J				1167

EXHIBIT D
 ROAD SURFACING

ROAD SEGMENT	6M to 6N			POINT TO POINT		Sta. to Sta.		TOTAL VOLUME (CY)
Application	Rock Size and Type	Location	Depth of Rock (inches)	6M to 6N		0+00 to 1+85		
				Volume (CY) per	Number of			
Base Rock	4"-0" Crushed	0+00 to 1+85	8	Station	50	Stations	1.85	92
Landings	6"-0" Pit-run	1+85		Landing	50	Landings	1	50
Total Rock for Road Segment:				6M to 6N				142
ROAD SEGMENT	6O to 6P			POINT TO POINT		Sta. to Sta.		TOTAL VOLUME (CY)
Application	Rock Size and Type	Location	Depth of Rock (inches)	6O to 6P		0+00 to 3+80		
				Volume (CY) per	Number of			
Base Rock	4"-0" Crushed	0+00 to 3+80	8	Station	50	Stations	3.80	190
Junction	4"-0" Crushed	0+00	8	Junction	25	Junctions	1	25
Landings	6"-0" Pit-run	3+80		Landing	50	Landings	1	50
Total Rock for Road Segment:				6O to 6P				265
ROAD SEGMENT	I1 to I2			POINT TO POINT		Sta. to Sta.		TOTAL VOLUME (CY)
Application	Rock Size and Type	Location	Depth of Rock (inches)	I1 to I2		0+00 to 30+50		
				Volume (CY) per	Number of			
Leveling Rock	1 1/2"-0" Crushed			Location	11	Locations	5	55
Surface Rock	1 1/2"-0" Crushed	0+00 to 30+50	4	Station	25	Stations	30.50	763
Turnouts	1 1/2"-0" Crushed	7+20, 13+80, 15+80 18+40, 23+50, 27+40	4	Turnout	11	Turnouts	6	66
Junctions	1 1/2"-0" Crushed	0+00, 3+50, 3+80, 20+40, 24+60	4	Junction	11	Junctions	5	55
Total Rock for Road Segment:				I1 to I2				939
ROAD SEGMENT	I3 to I4			POINT TO POINT		Sta. to Sta.		TOTAL VOLUME (CY)
Application	Rock Size and Type	Location	Depth of Rock (inches)	I3 to I4		0+00 to 10+00		
				Volume (CY) per	Number of			
Leveling Rock	4"-0" Crushed			Location	11	Locations	5	55
Base Rock	4"-0" Crushed	0+00 to 10+00	6	Station	38	Stations	10.00	380
Turnouts	4"-0" Crushed	3+90	6	Turnout	22	Turnouts	1	22
Junctions	1 1/2"-0" Crushed	0+00	4	Junction	11	Junctions	1	11
Total Rock for Road Segment:				I3 to I4				468
ROAD SEGMENT	I5 to I6			POINT TO POINT		Sta. to Sta.		TOTAL VOLUME (CY)
Application	Rock Size and Type	Location	Depth of Rock (inches)	I5 to I6		0+00 to 4+50		
				Volume (CY) per	Number of			
Leveling Rock	4"-0" Crushed			Location	11	Locations	2	22
Base Rock	4"-0" Crushed	0+00 to 4+50	6	Station	38	Stations	4.50	171
Turnouts	4"-0" Crushed	1+75	6	Turnout	22	Turnouts	1	22
Culvert Bedding and Backfill	1 1/2"-0" Crushed	3+50		Culvert	30	Culverts	1	30
Junctions	1 1/2"-0" Crushed	0+00	4	Junction	11	Junctions	1	11
Total Rock for Road Segment:				I5 to I6				256

EXHIBIT D
 ROAD SURFACING

ROAD SEGMENT				POINT TO POINT		Sta. to Sta.		TOTAL VOLUME (CY)
17 to 18				17 to 18		0+00 to 9+10		
Application	Rock Size and Type	Location	Depth of Rock (inches)	Volume (CY) per	Number of			
Leveling Rock	4"-0" Crushed			Location	11	Locations	2	22
Base Rock	4"-0" Crushed	0+00 to 9+10	6	Station	38	Stations	9.10	346
Turnaround	4"-0" Crushed	0+50	6	Turnout	11	Turnouts	1	11
Surface Rock	1 1/2"-0" Crushed	0+00 to 9+10	4	Station	25	Stations	9.10	227
Turnaround	1 1/2"-0" Crushed	0+50	4	Turnout	11	Turnouts	1	11
Junctions	1 1/2"-0" Crushed	0+00	4	Junction	11	Junctions	1	11
Total Rock for Road Segment:				17 to 18				628

ROAD SEGMENT				POINT TO POINT		Sta. to Sta.		TOTAL VOLUME (CY)
19 to 110				19 to 110		0+00 to 32+50		
Application	Rock Size and Type	Location	Depth of Rock (inches)	Volume (CY) per	Number of			
Leveling Rock	4"-0" Crushed			Location	11	Locations	6	66
Base Rock	4"-0" Crushed	0+00 to 32+50	6	Station	38	Stations	32.50	1235
Turnouts	4"-0" Crushed	3+70, 8+00, 15+60, 18+80, 21+30, 23+50	4	Turnout	22	Turnouts	6	132
"Y" Junction	4"-0" Crushed	0+00 to 1+50	6	Station	38	Stations	1.50	57
Junctions	1 1/2"-0" Crushed	0+00 & 0+00	4	Junction	11	Junctions	2	22
Culvert Bedding and Backfill	1 1/2"-0" Crushed	5+15		Culvert	30	Culverts	1	30
Total for Rock Road Segment:				19 to 110				1542

ROAD SEGMENT				POINT TO POINT		Sta. to Sta.		TOTAL VOLUME (CY)
111 to 112				111 to 112		0+00 to 5+89		
Application	Rock Size and Type	Location	Depth of Rock (inches)	Volume (CY) per	Number of			
Base Rock	4"-0" Crushed	0+00 to 5+89	10	Station	63	Stations	5.89	371
Fill Widening	4"-0" Crushed		10	Fill	12	Fills	1	12
Curve Widening	4"-0" Crushed		10	Curve	58	Curves	1	58
Ditch Armor	4"-0" Crushed		n/a	N/A		N/A		6
Settling Pond	4"-0" Crushed		n/a	N/A		N/A		6
Surface Rock	1 1/2"-0" Crushed	0+00 to 5+89	4	Station	25	Stations	5.89	147
Fill Widening	1 1/2"-0" Crushed		4	Fill	5	Fills	1	5
Curve Widening	1 1/2"-0" Crushed		4	Curve	24	Curves	1	24
Culvert Bedding and Backfill	1 1/2"-0" Crushed		n/a	Culvert	360	Culverts	1	360
Fill Armor	24"-6" Riprap		n/a	Fill	204	Fills	1	204
Embedded Dissipator	24"-12" Riprap		n/a	Culvert	24	Culverts	1	24
Total Rock for Road Segment:				111 to 112				1,217

Roads shall be uniformly graded and approved by STATE prior to rocking. For typical cross section, see Forestry Department Drawing Nos. 351-C and 351-D at the Forestry Department district office.

ROCK TOTALS (CY)	24" - 12"	24" - 6"	6" - 0"	4" - 0"	1 1/2" - 0"
21,689	24	524	1,150	15,148	4,843

EXHIBIT D

ROCK ACCOUNTABILITY

PURCHASER shall obtain subgrade approval from STATE prior to rocking. Rocking shall be limited to periods when weather conditions are acceptable to STATE and when sediments will not enter streams.

Rock accountability shall be determined by the following methods, as directed by STATE. STATE shall be given 24 hours' notice prior to rocking.

Rock Checking. All rock spreading shall be done only when a STATE representative is present. STATE shall issue a receipt for each load delivered, and rock shall be measured without allowance for shrinkage or shakedown during hauling. Total truck measure volume for each road segment shall be as shown on Exhibit D. Deliver at least 600 cubic yards per 8-hour shift, unless otherwise approved by STATE. A penalty of \$10 for each 10 cubic yards which are not delivered during a single shift shall be billed, and payment shall be required prior to final acceptance of the project by STATE.

Depth Measurement. Rock shall be spread and compacted according to the depths specified in Exhibit D. Truck measure volumes are given, but shall not limit the amount of rock spread.

Depth shall be determined in the most compacted area of the surface cross section. If additional rock is required because of insufficient depth, it shall be added by truck measure to those areas that were slighted. The conversion from compacted yardage to truck yardage is 1.3 multiplied by the compacted yardage equals truck yardage.

The depth of compacted aggregates shall not vary more than 1 inch from the depth specified in Exhibit D. The average depth for each road segment shall be the specified depth or greater. Surfacing areas shall be staked by STATE.

Load Records. Notify STATE before spreading the rock and maintain a record of all rock delivered for spreading. Make the record available for STATE inspection. A report listing the amount of rock delivered the prior month must be submitted no later than the 15th of each month.

EXHIBIT D

COMPACTION AND PROCESSING REQUIREMENTS

Subgrade. Subgrade surfaces of the road segments listed below shall be graded and compacted prior to rocking. Compaction shall be accomplished by traveling all surfaces from shoulder to shoulder until visible deformation ceases, or in the case of a sheepsfoot roller, the roller "walks out." At least 3 passes shall be made over the entire width and length of the road. A pass is defined as traveling a road section in one direction and then back over that same section again. Compaction shall be accomplished by using one or more of the approved equipment options listed below:

ROAD SEGMENT	COMPACTION EQUIPMENT OPTIONS
All road segments that require rock surfacing.	1

Fills. Embankments and fills shall be placed in (approximately) horizontal layers not more than 8 inches in depth. Each layer shall be separately, and thoroughly, compacted. Compaction equipment shall be operated over the entire width of each layer until visible deformation of the layers ceases or, in the case of a sheepsfoot roller, the roller "walks out." At least 3 passes shall be made over the entire width and length of each layer. A pass is defined as traveling a fill layer in one direction and then back over that same layer again.

Placing individual rocks or boulders with more depth than the allowed layer thickness shall be permitted, provided the embankment will accommodate them. Such rocks and boulders shall be at least 6 inches below the subgrade. They shall be carefully distributed and the voids filled with finer material, forming a dense and compacted mass. Compaction shall be accomplished by using one or more of the approved equipment options listed below:

ROAD SEGMENT	COMPACTION EQUIPMENT OPTIONS
All road segments	1, 2, or 3; and 4

Crushed Rock. The rock shall be uniformly mixed and spread in layers on the approved roadbed. Each layer of crushed rock shall be moistened or dried to a uniform moisture content suitable for maximum compaction and compacted in layers not to exceed 8 inches in depth. When more than 1 layer is required, each shall be shaped and compacted before the succeeding layer is placed. Any irregularities or depressions that develop during compaction of the top layer shall be corrected by loosening the material at these places and adding or removing material until the surface is smooth and uniform. Each layer shall be compacted with a minimum of 3 passes over the entire width and length of the road. A pass is defined as traveling a road section in one direction and then back over that same section again. Compaction shall be accomplished by using one or more of the approved equipment options listed below:

ROAD SEGMENT	COMPACTION EQUIPMENT OPTIONS
All road segments requiring crushed rock	1

EXHIBIT D

COMPACTION EQUIPMENT OPTIONS

- (1) Vibratory Rollers. The drum shall have a smooth surface, a diameter not less than 48 inches, a width not less than 58 inches, and a turning radius of 15 feet or less. Vibration frequency shall be regulated in steps to 1400, 1500, and 1600 VPM, corresponding to engine speeds of 1575, 1690, and 1800 RPM. The centrifugal force developed shall be 7 tons at 1600 VPM. It shall be activated by a power unit of not less than 25 horsepower. The vibratory roller shall be self-propelled and operated at speeds ranging from 0.9 miles to 1.8 miles per hour, as directed by STATE.
- (2) Rubber-Tired Skidders. A rubber-tired skidder weighing a minimum of 20,000 pounds shall be operated over the fill layers so that the entire layered surface comes in contact with the tires. Skidders with oversized tires (high flotation) are not acceptable for compaction.
- (3) Tampingfoot Compactors. Tampingfoot or sheepsfoot compactors shall exert a minimum pressure of 250 pounds per square inch on the ground area in contact with the tamping feet. The compactor shall cover a minimum width of 60 inches per pass and weigh a minimum of 16,000 pounds.
- (4) Vibratory Hand-Operated or Backhoe-Mounted Tamper. Vibratory hand-held or hydraulic tampers shall be used for compaction of backfill materials around culverts (and/or bridge approach embankment materials around abutments). The tamper shoe dimensions shall be a minimum of 10" X 13" and capable of a centrifugal force of 2,250 pounds.

EXHIBIT E
CULVERT SPECIFICATIONS

All culvert materials shall be furnished and installed by PURCHASER, unless otherwise specified in the Contract. All culverts shall be constructed of double-walled polyethylene, or corrugated aluminized Type 2 steel, except for Culvert No. 29, which shall be constructed of corrugated aluminized Type 2 steel. All culverts shall conform to the material and fabricating requirements of the "Standard Specifications for Highway Construction" prepared by the Highway Division of the Oregon State Department of Transportation. Corrugation types and shapes other than those meeting the above minimum Highway requirements, shall be approved in writing by STATE.

Culvert No. 29 is 96 inches in diameter and shall be step-beveled on the inlet and outlet.

Culverts shall be located according to the alignment and grade as shown on the Plan and Profile, and/or as staked in the field, or as stipulated in special instructions.

The STATE Representative shall determine final culvert locations and stake the locations in the field prior to installation.

Culvert grade shall slope away from ditch grade at least 2 percent unless otherwise specified.

The foundation and trench walls for all culverts shall be free from logs, stumps, limbs, stones over 3 inches, and other objects which would dent or damage the pipe during installation or use. The culvert trench shall be excavated wide enough to permit compaction and working on each side of the pipe. Tamping shall be done in 6-inch lifts, 1 pipe diameter each side of the pipe to 95 percent density or over. Bedrock shall be excavated as required to provide a uniform foundation for the full length of the culvert. Additional fill shall be embankment material.

A bedding of granulated material or crushed rock as specified shall be placed to provide a wide band of support and to transmit the load from above evenly over the entire length of the pipe.

Backfill shall consist of granulated material, crushed rock, or job-excavated soil free of stumps, limbs, rocks, or other objects which would damage the pipe.

Transporting of the pipe shall be done carefully. Dragging or allowing free fall from trucks or into trenches shall not be Permitted.

Joining shall be done with bands of like material and corrugations. Manufacturers' instructions shall be followed for prefabricated pipe assembly.

Polyethylene joints shall be made with split couplings, corrugated to engage the pipe corrugations, and shall engage a minimum of 4 corrugations, 2 on each side of the pipe joint.

A manufacturer's certification that the product was manufactured, tested, and supplied in accordance with this specification shall be furnished to the Project Engineer upon request.

Fill heights, if not shown on a road plan and profile, shall be in accordance with those shown in Drawing No. 2094, "Fill Height Tables", prepared by the Highway Division of the Oregon State Department of Transportation. Any deviation must be approved by STATE.

Minimum height of cover over top of culvert to subgrade when road is to be rocked shall be as follows: 12" for culverts 18" to 36" and 18" for culverts 42" to 96" (add 6" for roads which will not be rocked). Minimum vertical cover for other designs shall be as specified by STATE.

EXHIBIT E
 CULVERT SPECIFICATIONS

Lengths of individual culvert sections shall be not less than 10 feet, unless otherwise provided for in special instructions.

The ends of each culvert shall be free of logs and debris which would restrict the free flow of water. The intake end of relief culverts shall be provided with a sediment catching basin 3 feet in diameter at the bottom. The outlet end of any culvert which would allow water to erode embankment soil shall be provided with a half round or other approved slope protection device. Construct lead-off ditches away from culvert outlets where the slope gradients restrict the free flow of water.

Following are the minimum standard gauges for pipe and coupling bands. Some culverts may require different gauges and may be found in the culvert listing.

Dia.	Steel Pipe Gauge	Band Gauges	Band Widths (")			Hugger Band Widths (")	
			Annular	Helical	Dimpled	Annular	Helical
12-15	16 (0.0598")	16	7	12	12	13 1/8	10 1/2
18-24	16 (0.0598")	16	12	12	12	13 1/8	10 1/2
30-36	16 (0.0598")	16	12	12	12	13 1/8	10 1/2
42	14 (0.0747")	16	12	12	NA	13 1/8	10 1/2
48	14 (0.0747")	16	24	24	NA	13 1/8	10 1/2
54	14 (0.0747")	16	24	24	NA	13 1/8	10 1/2
60	12 (0.1046")	16	24	24	NA	13 1/8	10 1/2
66-72	12 (0.1046")	16	24	24	NA	13 1/8	10 1/2
78	12 (0.1046")	16	24	24	NA	13 1/8	10 1/2
84	12 (0.1046")	16	24	24	NA	14 3/4	10 1/2
90-120	12 (0.1046")	16	26	26	NA	NA	NA

Culverts larger than 60" in diameter shall have 3" x 1" corrugations.

The intake ends of culverts in fills less than 3 feet shall be marked by driving white fiberglass posts within 6 inches of the downgrade side. Posts shall be a minimum of 6 feet long and 2 1/2 inches wide, with the spade driven 2 feet into the ground.

Tamping is required.

All removed culverts shall be hauled to an approved refuse site off of STATE land.

CULVERT LIST

CULVERT NO.	DIAMETER (Inches)	LENGTH (Feet)	ROAD SEGMENT POINT TO POINT	STATION
1	18	40	1A to 1B	0+00
2	18	30	1A to 1B	7+70

EXHIBIT E
 CULVERT LIST


CULVERT NO.	DIAMETER (Inches)	LENGTH (Feet)	ROAD SEGMENT POINT TO POINT	STATION
3	18	40	1A to 1B	10+55
4	18	40	1A to 1B	21+55
5	18	30	1A to 1B	24+80
6	18	35	1C to 1D	0+97
7	18	30	1C to 1D	15+05
8	18	30	1C to 1D	20+65
9	18	30	1C to 1D	23+50
10	18	30	1C to 1D	27+95
11	18	30	1C to 1D	33+85
12	18	30	1K to 1L	3+90
13	18	30	4A to 4B	4+85
14	18	30	5A to 5B	1+00
15	18	35	5C	0+00
16	18	35	5F to 5G	1+15
17	18	40	6A to 6B	8+60
18	18	40	6A to 6B	12+55
19	18	40	6C to 6D	14+30
20	18	40	6C to 6D	20+30
21	18	35	6C to 6D	30+47
22	18	30	6E to 6F	3+80
23	18	30	6I to 6J	6+30
24	18	30	6K to 6L	3+90
25	18	30	6K to 6L	10+00
26	18	30	6O to 6P	2+75
27	18	30	I5 to I6	3+50
28	18	30	I9 to I10	5+15
29	96" CSP al. ctd.	98	I11 to I12	4+15

EXHIBIT F

ROCK QUARRY DEVELOPMENT AND USE

- (1) PURCHASER shall prepare a written development plan for the quarry area. The plan shall be submitted to STATE for approval prior to conducting any operation in the quarry area. The plan shall include, but not be limited to:
 - (a) Location of benches and roads to benches.
 - (b) Disposal site for debris and overburden.
 - (c) Time lines for rock quarry use.
 - (d) Erosion Control measures.
- (2) Controlled blasting techniques shall be utilized for any blasting operations, and shall be accomplished using timing devices, delayed charges, low intensity shots, or other suitable means to contain as much material as possible within the quarry development area. PURCHASER shall maintain a comprehensive blasting log that contains all pertinent data for all blasting operations. The blasting log shall be submitted to the STATE after the completion of all blasting activity. The blasting log is intended for STATE record keeping purposes only.
- (3) PURCHASER shall conduct the operations relative to the disposal of waste material in such manner that silt, rock, debris, dirt, or clay shall not be washed, conveyed, or otherwise deposited in any stream.
- (4) At the Fall Creek Quarry, fall all timber within the posted right of way boundary and remove all merchantable timber. All woody debris, including stumps and slash shall be hauled to the designated waste areas, piled and disposed of by burning as directed by STATE.
- (5) At the Munce Quarry, fall all timber within the posted right of way boundary and deck all merchantable timber, as directed by STATE. The timber is property of Longview Fibre Company. All woody debris, including stumps and slash shall be hauled to the designated waste area and piled, as directed by STATE.
- (6) PURCHASER shall obtain a FPA Burn Permit prior to debris disposal for the Fall Creek Quarry. Burning operations shall be conducted during periods when "Fire Season" has not been declared. The burnt piles shall be "100% mopped up", prior to the declaration of "Fire Season".
- (7) All overburden and reject material shall be hauled to the designated waste area as directed by STATE.
- (8) Benches shall be constructed at intervals of 40 feet or less in height and shall be a minimum of 20 feet in width. Any gravel or talus slopes shall be left with a working face at an angle of 60 degrees or less. There shall be a minimum of one bench with an access road to it. Said bench shall be easily accessible with tractors.
- (9) Quarry face shall be developed in a uniform manner.
- (10) Oversized material that is produced or encountered during development shall be broken down and utilized for crushing.
- (11) The quarry site shall be left in a condition free from overburden and debris. Access roads to the quarry, and the quarry floor, shall be cleared at the termination of use. Overburden shall be removed for a distance of 20 feet beyond the developed rock source.
- (12) The quarry floor shall be developed to provide for drainage away from the quarry. All quarry and stockpile site drainage ditches shall be maintained. Quarry access roads shall be cleared and blocked upon completion of quarry use as directed by STATE.
- (13) Proper winterization and storm-water control measures such as waterbarring, drainage, utilization of filter bales, mulching and/or blocking access shall be constructed and maintained to protect the watershed and project work, as directed by STATE.


EXHIBIT F
ROCK QUARRY DEVELOPMENT AND USE

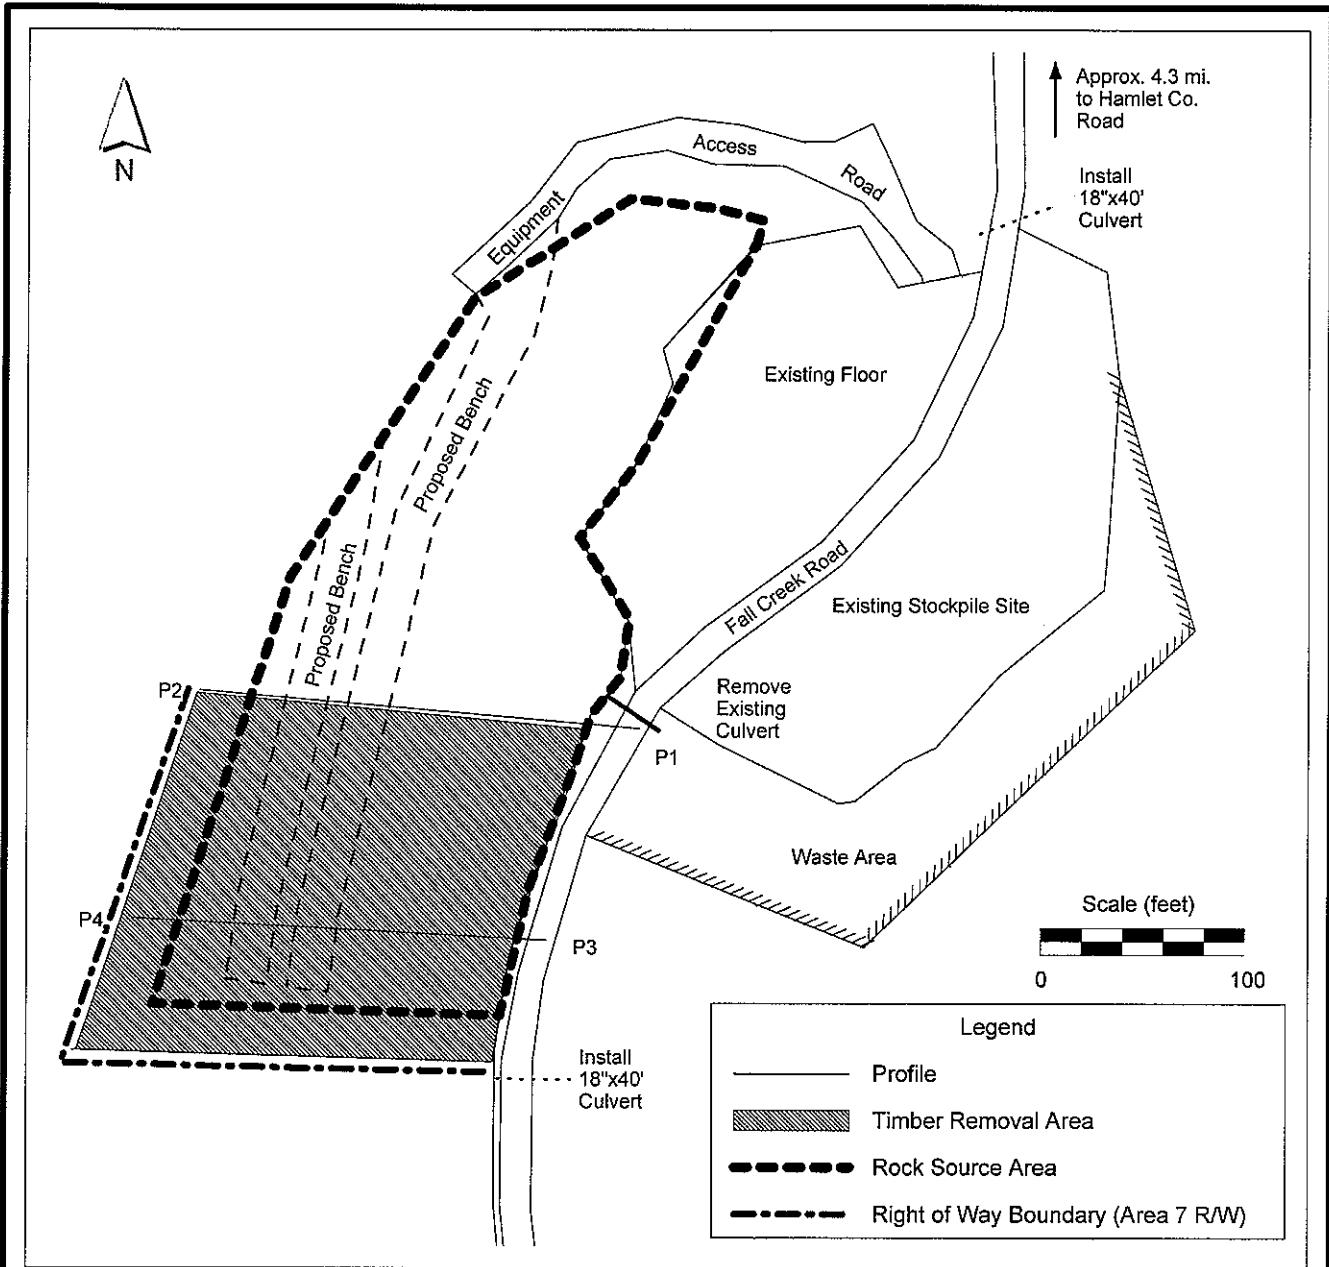

Oregon Department of Forestry
Astoria District
Engineering Unit

Fall Creek Quarry
NW1/4, Section 20, T4N, R8W, W. M.
Clatsop County, Oregon


EXHIBIT F
ROCK QUARRY DEVELOPMENT AND USE

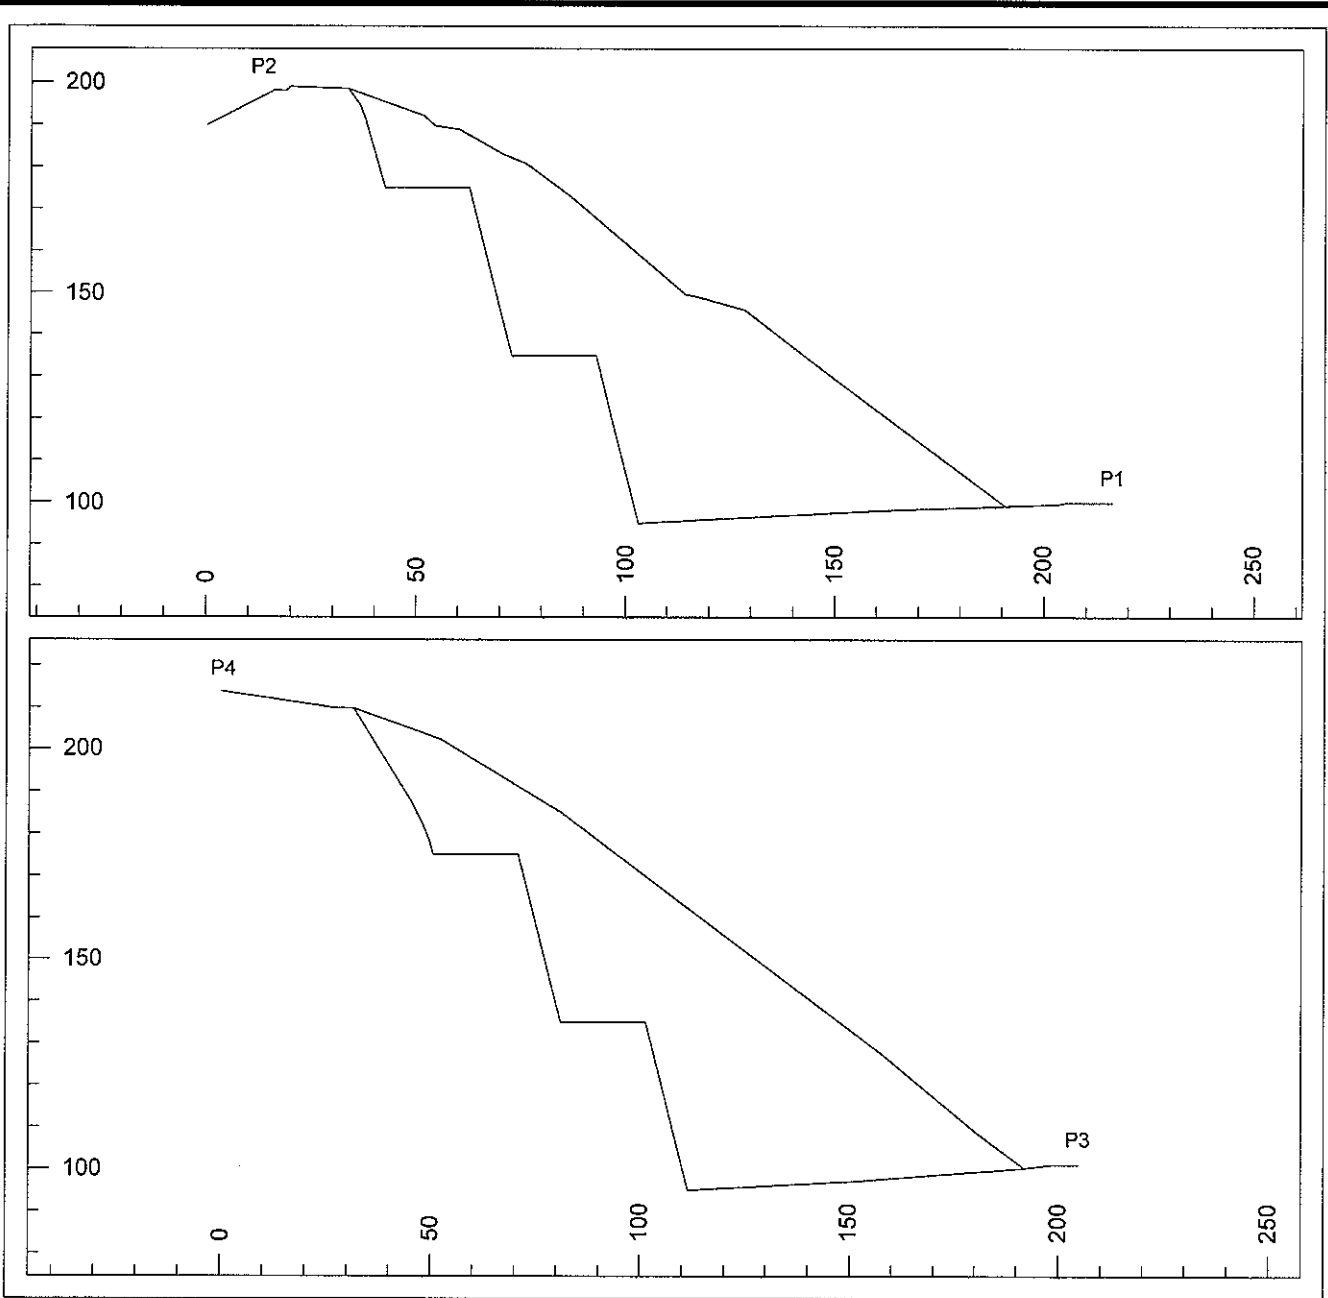

Oregon Department of Forestry
Astoria District
Engineering Unit

Fall Creek Quarry
NW1/4, Section 20, T4N, R8W, W. M.
Clatsop County, Oregon

EXHIBIT F
ROCK QUARRY DEVELOPMENT AND USE

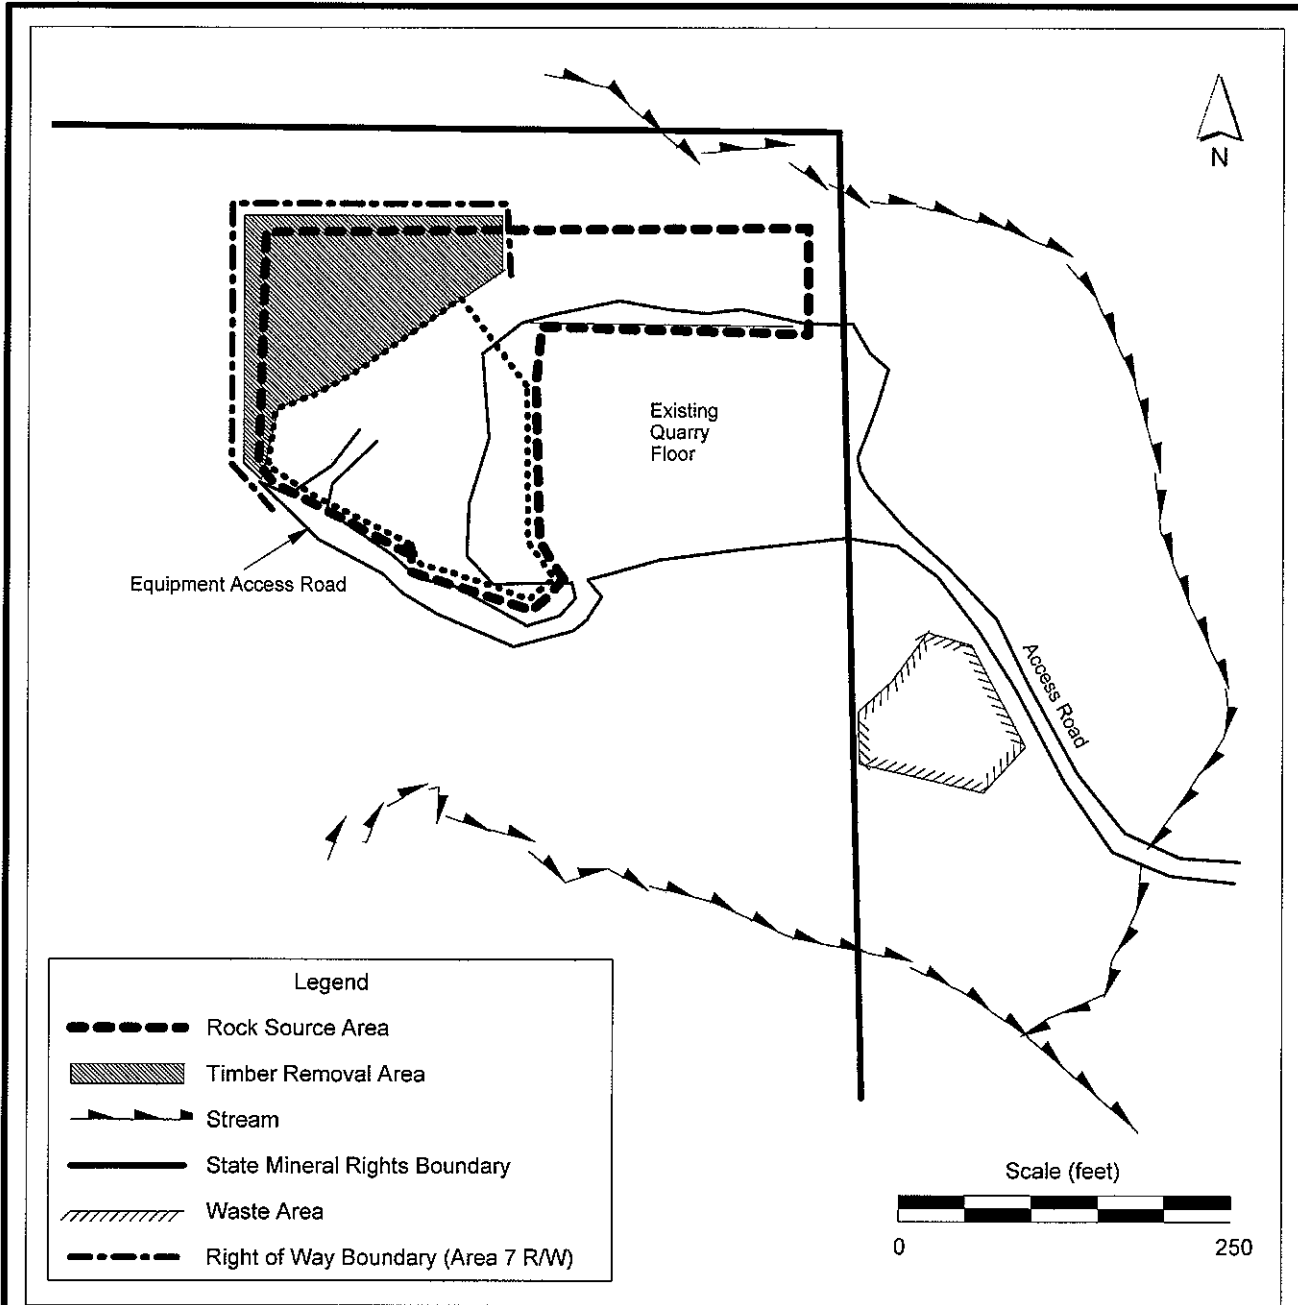

Oregon Department of Forestry
Astoria District
Engineering Unit

Munce Quarry
NW1/4, NE1/4 Section 31, T5N, R8W,
Clatsop County, Oregon

EXHIBIT G

ROCK SPECIFICATIONS

Materials. The material shall be fragments of rock or other hard, durable particles crushed to the required size and a filler of finely crushed stone, sand, or other finely divided mineral matter. The material shall be free from vegetation and lumps of clay. STATE may require screening and/or rejecting of materials utilized for production of crushed rock for the purpose of removing excess fines or dirt.

Quality and Grading Requirements. The stone base materials shall be crushed rock, including sand. River gravel shall not be used.

The material from which base material is produced or manufactured shall conform to the general requirements of Section 2630 of the "Standard Specifications for Highway Construction" prepared by the Highway Division, Oregon Department of Transportation, and shall meet the following test requirements:

Hardness - Test Method AASHTO T 96 35% Maximum

Durability - Test Method OSHD Standard
Passing No. 20 Sieve: 30% Maximum
Sediment Height: 3" Maximum

<u>For 1"-0"</u>	Passing	1½" sieve	100%
	Passing	1" sieve	90-100%
	Passing	½" sieve	55-75%
	Passing	¼" sieve	40-60%

Of the fraction passing ¼" sieve, 40% to 60% shall pass the No. 10 sieve.

<u>For 1½"-0"</u>	Passing	2" sieve	100%
	Passing	1½" sieve	95-100%
	Passing	¾" sieve	60-90%
	Passing	¼" sieve	35-50%

Of the fraction passing ¼" sieve, 40% to 60% shall pass the No. 10 sieve.

<u>For 4"-0"</u>	Passing	4" sieve	100%
	Passing	2" sieve	60-90%
	Passing	¼" sieve	20-35%

The referenced sieve shall have square openings as set forth in AASHTO M 92, Woven Cloth Series. The determinations of size and gradings shall be as set forth in AASHTO T 27.

PIT-RUN AND RIPRAP ROCK SPECIFICATIONS

<u>For 6"-0" Pit-Run</u>	Passing	10" sieve	100%
	Passing	6" sieve	65%

For 24"-6" and 24-12" Riprap A minimum of 50 percent of the material shall measure a minimum of 24 inches, measured in one dimension. Material shall be clean, well graded, and free of 2"-0" fines.

Control of gradation shall be by visual inspection by STATE.

EXHIBIT H

TYPE F STREAM CROSSING

- (1) Type F stream fill reconstruction must allow free passage of fish as provided in the Oregon Forest Practice Rules. Modifications of the existing culvert geometry shall be required to allow free passage of fish.
- (2) Work shall be conducted only during periods of low water flows and between July 1 and September 15, annually. STATE shall be notified a minimum of 48 hours prior to beginning work. STATE has prepared "Written Plans" for this work. A pre-work meeting will be held on-site prior to commencement of work on the project. Oil spill response materials shall be on site before work begins.
- (3) A minimum 2 cubic-yard, track-mounted large class excavator shall be used for all excavation, stream channel development, and riprap placement. Use of an on site hydraulic rock hammer may be required for the breaking of rock strata encountered during the development of the culvert bed.
- (4) Excavated debris and soil materials unsuitable for fill construction shall be hauled to the Waste Areas as shown on Exhibit A. All woody debris encountered during excavation shall be removed and hauled to the waste area. The existing culvert shall be hauled to an approved refuse site off of STATE land.
- (5) Waste materials shall be sloped for drainage and stability, as directed by STATE. Large woody debris shall be redistributed over the waste area after all waste materials have been hauled.
- (6) Grass seed and straw mulch shall be applied to all exposed areas, bare soils and waste materials as directed by STATE in accordance with Exhibit M.
- (7) De-watering of the work site shall be accomplished prior to the removal of any fill material below the top or along the flanks of the culvert, removal of the existing culvert, or the development of the culvert bed and stream channel. The work site shall be de-watered by the use of cofferdams, pumps, temporary diversion ditches and/or drainage structures. De-watering, once begun, shall be continual until such time that the stream has been released into the new culvert, as directed by STATE.
- (8) Remove existing fill, culvert, and any logs or woody debris.
- (9) Coordinates for the inlet and outlet of the new culvert are on page 3 of 4 of this exhibit.
- (10) Develop the stream channel for a distance of 25 feet upstream of the inlet of the culvert and 25 feet downstream of the outlet, as directed by STATE. The stream channel width will be 8 feet and stream channel banks shall be sloped at 2:1.
- (11) Native (excavated) stream sediment material (cobble) shall be placed in the culvert barrel to a depth of 38.4 inches, as directed by STATE.
- (12) Excavated boulders or riprap rock (24"-12" material) shall be placed and embedded in the culvert barrel in three locations, and 10 to 12 feet from the outlet of the new culvert to allow additional stream sediment materials to settle in the barrel of the pipe and to prevent the flushing of material placed per item 11 above as directed by STATE.
- (13) Fill reconstruction backfill shall consist of select materials obtained from: the existing fill, excavated road material from the improvement road segment I11 to I12, reject crushed material located in the Cole Mountain Quarry as indicated on Exhibit A and 1 1/2"-0" crushed rock, as directed by STATE. Backfill and embankment materials shall be thoroughly compacted in accordance with Exhibit D.

EXHIBIT H

TYPE F STREAM CROSSING


- (14) Utilize 360 cubic yards of 1½"-0" crushed rock for culvert bedding and backfill. It shall utilize 204 cubic yards of 24"-6" riprap rock for armoring fill slopes. Utilize 24 cubic yards of 24"-12" riprap rock for embedding within the culvert and at the outlet.

24"-6" Riprap rock shall be placed and tamped at a 1½:1 slope for a minimum thickness of 2 feet beginning at the toes.

- (15) There will be 8 feet of curve widening applied to the inside of the curve from station 3+54 to station 5+32. Subgrade and Road Surface widths for segment I11 to I12 are as follows:

<u>Station</u>	<u>Subgrade Width</u>	<u>Road Surface Width</u>
0+00 – 3+54	16 feet	12 feet
3+54 – 4+00	24 feet	20 feet
4+00 – 4+65	28 feet	24 feet
4+65 – 5+32	24 feet	20 feet
5+32 – 5+89	16 feet	12 feet


EXHIBIT H
TYPE F STREAM CROSSING

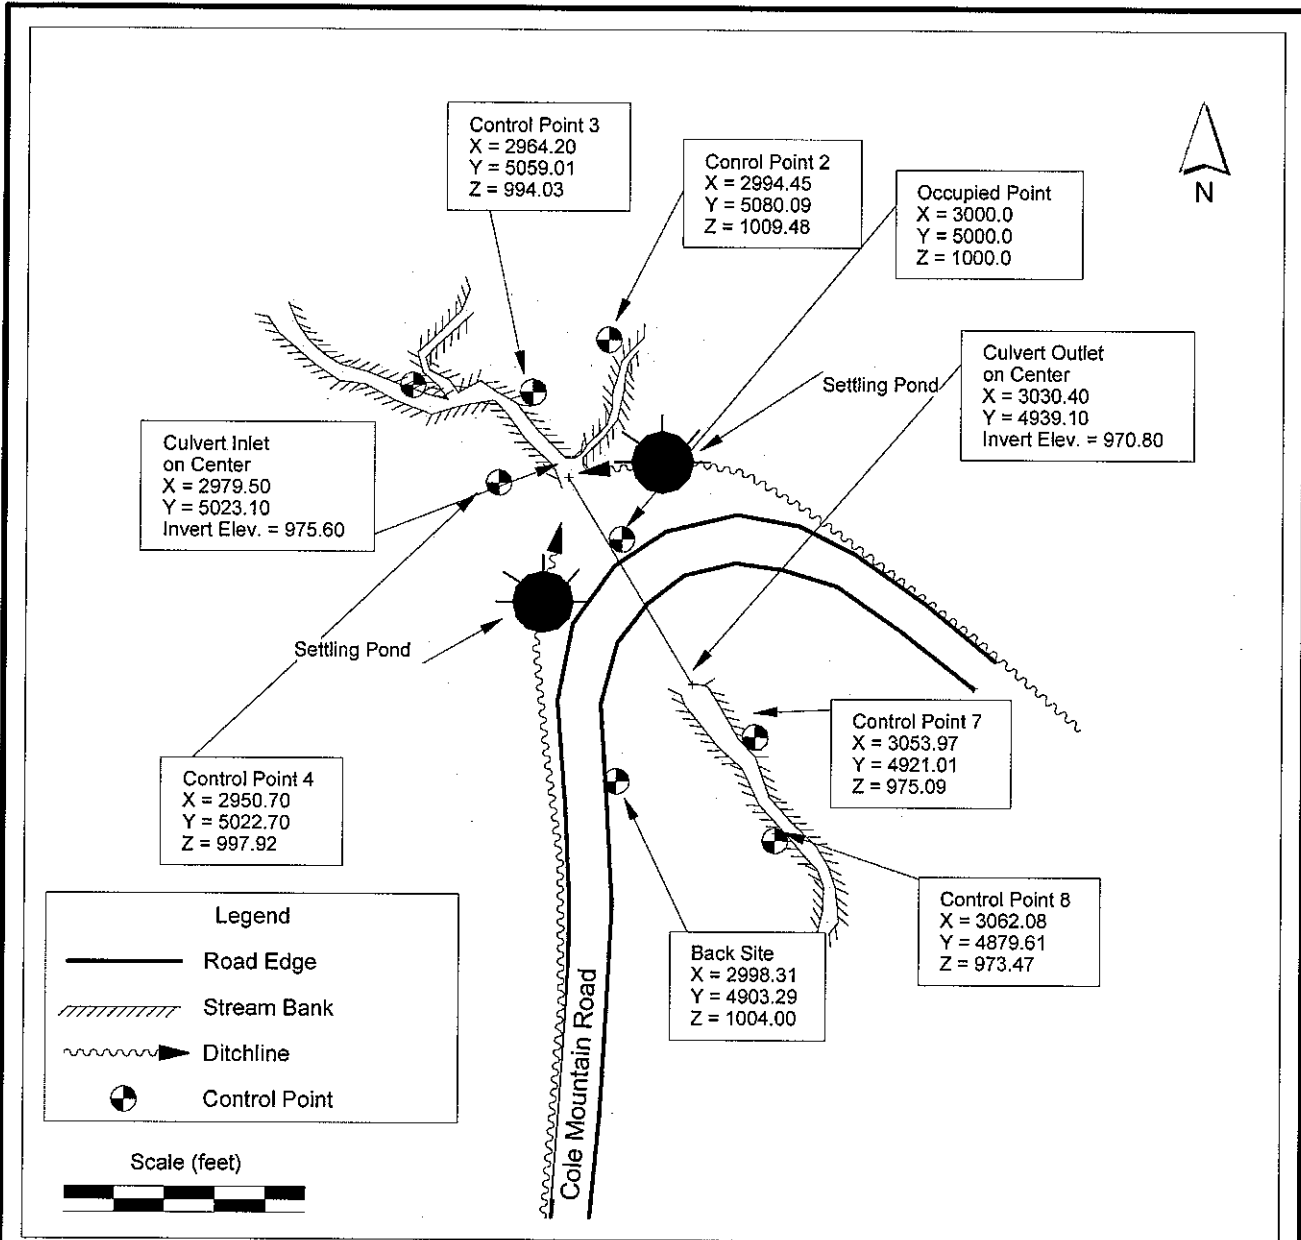

Oregon Department of Forestry
Astoria District
Engineering Unit

Point I11 to Point I12
Station 4+15
SW1/4, Section 7, T4N, R8W, W. M.
Clatsop County, Oregon

EXHIBIT H
 TYPE F STREAM CROSSING

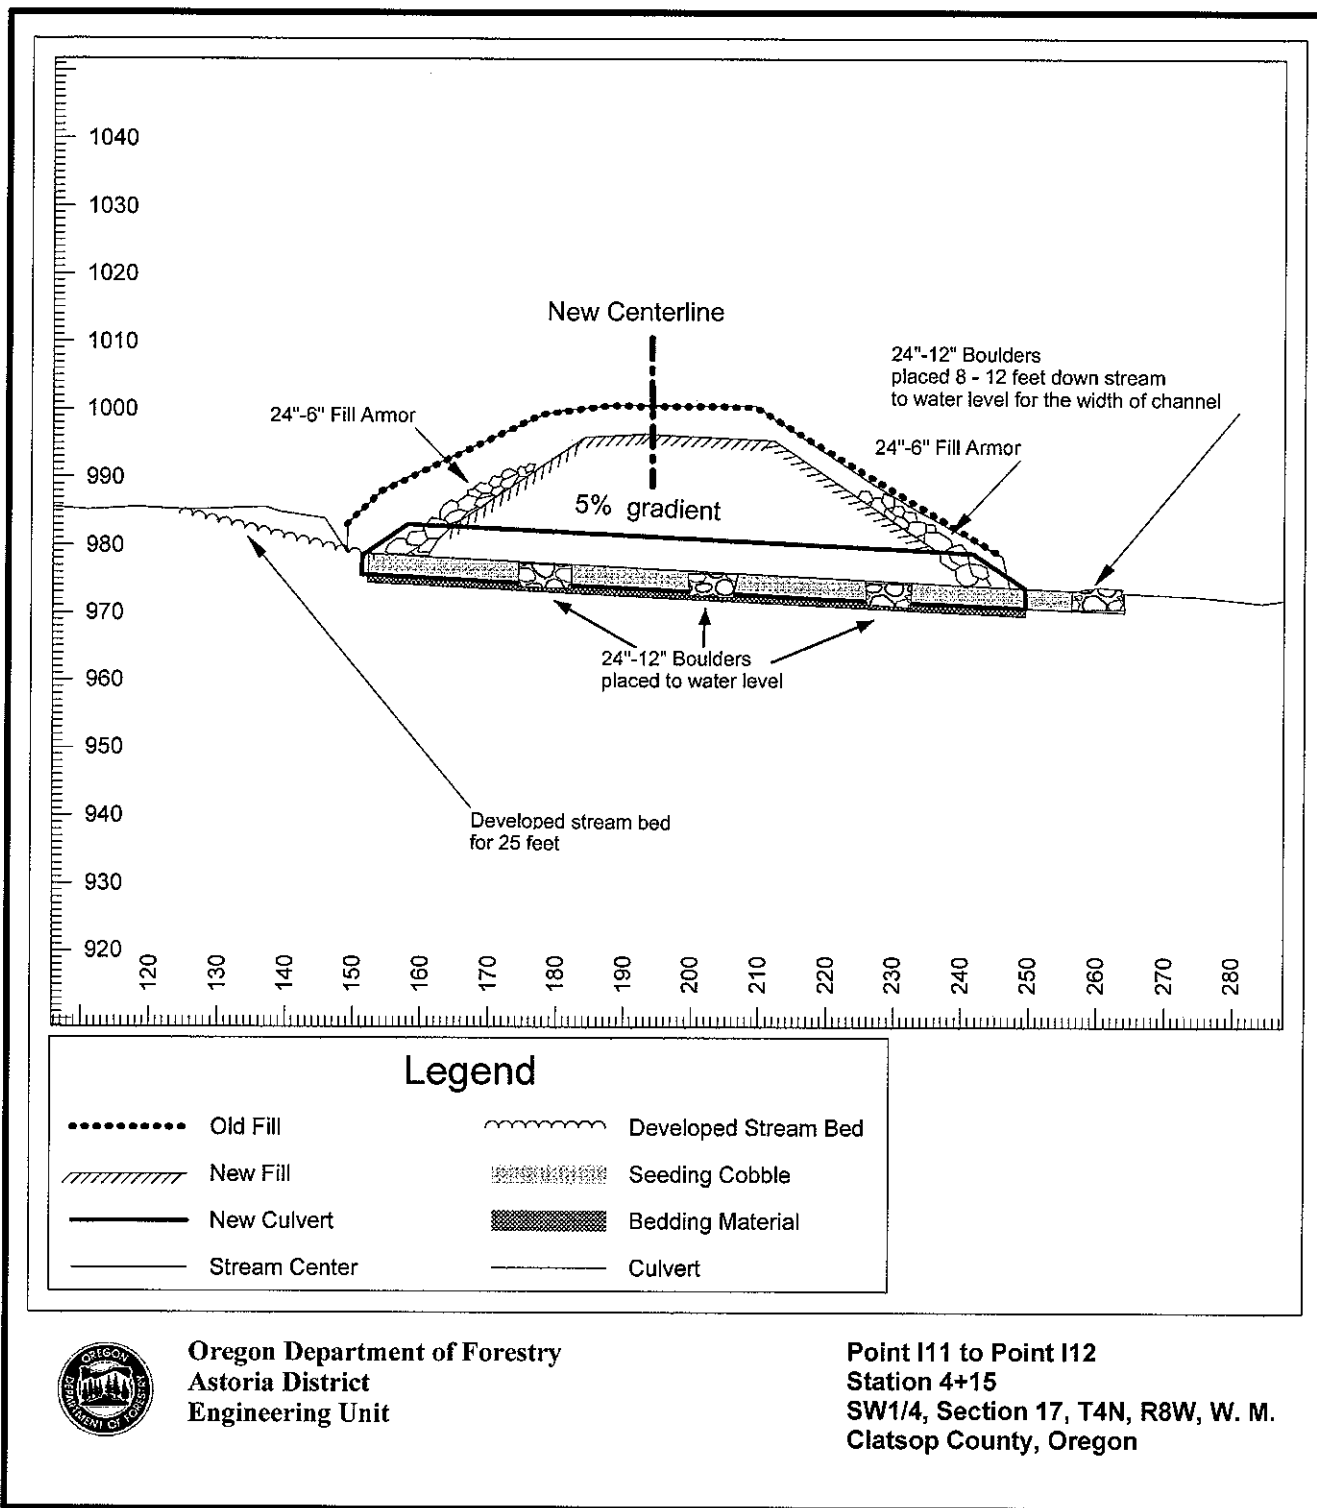

Oregon Department of Forestry
 Astoria District
 Engineering Unit

Point I11 to Point I12
 Station 4+15
 SW1/4, Section 17, T4N, R8W, W. M.
 Clatsop County, Oregon

EXHIBIT I

TYPICAL EMBEDDED ENERGY DISSIPATOR



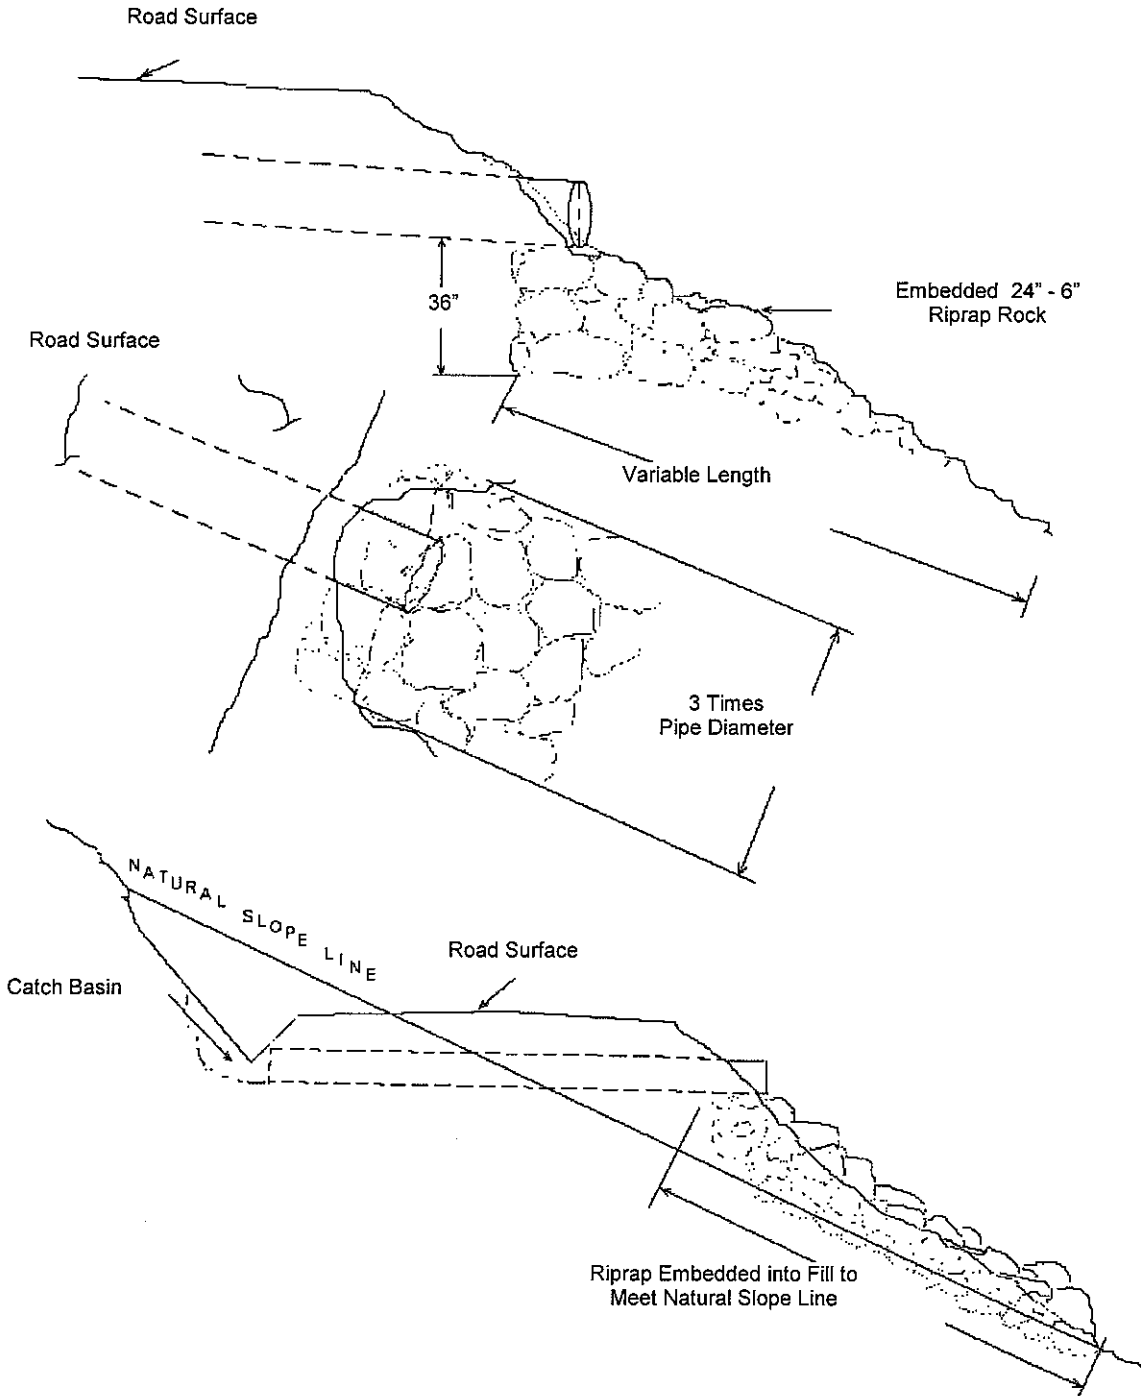



EXHIBIT J

WATERBAR SPECIFICATIONS

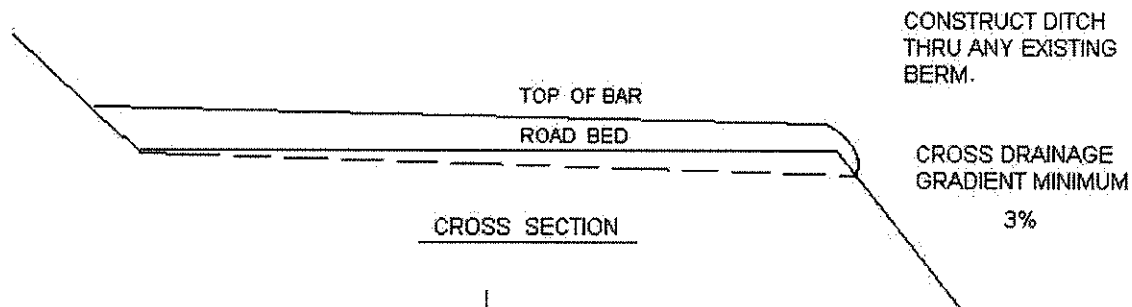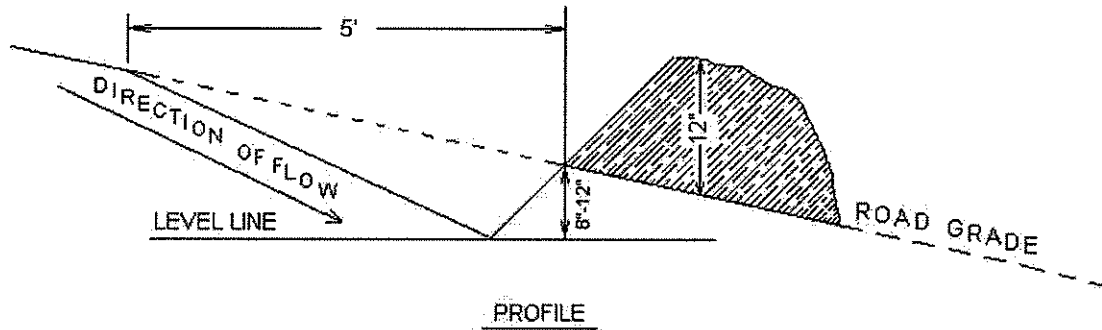

SPACING OF WATERBARS:

ROAD GRADE	DISTANCE
≤ 5%	400'
6-10%	200'
11-15%	150'
16-20% or Greater	100'

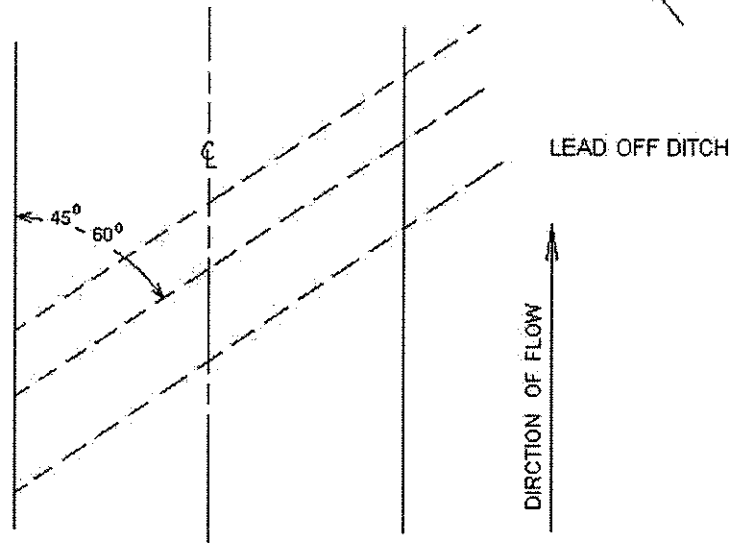

PLAN VIEW

WATERBAR SPECIFICATIONS
 FOR CROSS DITCHING. #298

EXHIBIT K

ROAD VACATING AND FILL REMOVAL SPECIFICATIONS: V1 and V2 to V3

- (1) Culvert Removal. Remove drainage structures and culverts. Removed culverts shall be hauled to an approved refuse site off of State Land.
- (2) Fill Removal and Stream Channel Development. Remove fills to the natural stream course level(s). Stream channel(s) shall be excavated/developed to a width of 4 feet. Developed stream banks shall be sloped at natural contours or no steeper than 1½:1, as directed by STATE. Remove culvert and fill at 5+30 on V2 to V3 in accordance with FPA Written Plan.
- (3) Use of Excavated Materials.
 - (a) Fill Excavation. Excavated materials shall be placed on the interior (cut) side of the road a minimum of 10 feet from the top of the developed stream bank, and utilized to restore the cutslope to natural contours, or to a minimum 10% outsloped surface for drainage. Any excess material will be hauled to a designated waste area, as directed by STATE.
 - (b) Woody Debris may be incorporated in embankment material, and/or placed on the surface of the compacted embankment material.
 - (c) Block Roads. Use excavated material from fill removals to block roads from vehicle access, as directed by STATE.
- (4) Construct Waterbars as directed by STATE. Construct waterbars according to the specifications in Exhibit J.
- (5) Existing Road Rock from 0+00 to 8+50 on V2 to V3.
 - (a) Grade existing road rock into interior (cut) side of road and utilize to restore the cutslope to natural contours or to a minimum 10% out slope for drainage.
 - (b) Rip existing subgrade to a minimum of 12 inches.
- (6) Rock Salvage. Remove, salvage and stockpile the existing crushed surfacing rock from 8+50 to 11+35. Salvaged rock shall be stockpiled on McCracken property, immediately south of Point V3, or as directed by STATE.
- (7) Erosion Control. All excavated material and bare soil shall utilize grass seed and straw mulch approved by STATE and in accordance with the specifications in Exhibit M. Applied mulch shall be a minimum of 2 inches deep and provide a uniform cover.
- (8) Equipment. A minimum 1½ cubic-yard, track mounted excavator shall be used for all excavation, culvert removal, streambed preparation, road blocking, and waterbarring, unless otherwise approved in writing by STATE.

EXHIBIT L


FABRIC SPECIFICATIONS

FABRIC SPECIFICATIONS - shall be woven fabric designed for forest road subgrade surfacing purposes and shall meet or exceed the following requirements, unless otherwise approved in writing by STATE:

- | | | | |
|-----|--------------------------------|----------|------------|
| (1) | Grab Tensile | 300 lbs. | ASTM D1682 |
| (2) | Modulus Load at 10% Elongation | 140 lbs. | ASTM D1682 |
| (3) | Mullen Burst | 600 lbs. | ASTM D751 |
| (4) | Width – 12.5 feet | | |

INSTALLATION REQUIREMENTS - fabric shall be installed according to the following requirements:

- (1) Typical cross section:

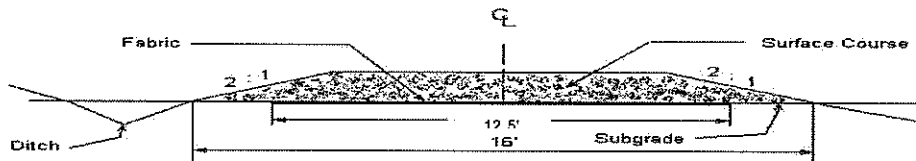

- (2) Subgrade surface shall be leveled and smoothed to remove humps and depressions which exceed 6 inches in height and depth. Small pieces of woody debris shall be removed or pushed below subgrade surface. Light vegetation (grass, weeds, leaves, and fine woody debris) may be left in place.
- (3) Fabric shall be installed directly on the prepared surface. Longitudinal and traverse joints shall be overlapped at least 3 feet.
- (4) Surfacing course material shall be placed to the designated thickness in one lift and spread in the direction of fabric overlap. Hauling and spreading equipment shall not be operated on the fabric until the total thickness of surfacing course material is placed.
- (5) Torn, punctured, or separated sections of the fabric shall be repaired by installing a fabric patch over the break prior to placing the surfacing course material. The patch shall be at least 4 feet larger in horizontal dimensions than the break to be repaired.
- (6) Fabric failures resulting after rock placement and as evidenced by subgrade pumping or roadbed distortion shall be corrected. Correction measures shall consist of: (1) removing at least three-quarters the depth of surfacing course material in the affected area, (2) placing a fabric patch over the affected area with a minimum 4-foot overlap around the circumference of the area, and (3) replacing enough rock to cover the patch and blend in with the rest of the road.
- (7) Should STATE determine that installation of woven fabric on roads or portions of roads is not necessary, PURCHASER shall deliver an equivalent amount of woven road fabric to STATE.
- (8) Fabric locations:
- (9)

Road Segment	Location	Road Segment	Location
1C to 1D	0+00 to 37+00	6A to 6B	0+00 to 16+50
4A to 4B	0+00 to 7+30	6C to 6D	0+00 to 36+15
5A to 5B	0+00 to 5+85	6I to 6J	0+00 to 9+00
5F to 5G	0+00 to 5+70	6K to 6L	0+00 to 14+80

EXHIBIT M

GRASS SEEDING AND MULCHING

This work shall consist of furnishing and placing required hydroseed, grass seed and straw mulch.

Seeding Season. Seeding shall be performed only from March 1 through June 15 and August 15 through October 31. Seeding materials shall not be applied during windy weather or when the ground is excessively wet or frozen. Work shall be performed during each specified seeding season on all completed and previously untreated sections. PURCHASER shall notify STATE 24 hours prior to hydroseeding.

Application Rates and Seed Mixtures

Seed Mixtures. The seed listed below shall be applied at the following rate: 100 lbs. per acre, unless otherwise approved in writing by the STATE:

SPECIES <i>Common Name (varieties)</i>	MIXTURE (percent)	PURE LIVE SEED	POISON AND/OR REPELLENT	GERMINATION
Annual Ryegrass	26%	95%	0	> 90%
Orchard Grass	25%	95%	0	> 90%
New Zealand White Clover	17%	95%	0	> 90%
Perennial Ryegrass	15%	95%	0	> 90%
Birdsfoot Trifol	07%	95%	0	> 90%
Red Clover	06%	95%	0	> 90%
Alsike Clover	04%	95%	0	> 90%

Application Methods for Grass Seeding

Hydroseeding. The areas designated for hydroseeding are those areas of exposed soils on the cut banks and fill slopes (that are not armored) that are 6 feet or greater or those areas marked on the ground by STATE in Project No. 1. PURCHASER shall supply the hydroseeding. The hydroseeding shall consist of the following: Cellulose fiber produced from virgin wood, grass straw, or paper fiber product. The mulch material shall be free of noxious weed seeds and plants and contain no substance detrimental to plant life. Process the wood or straw mulch so that the fiber remains uniformly suspended under agitation in water. Blend the mulch with seed, fertilizer, and typical additives of a hydroseeding mixture to form a homogeneous slurry. The processed mulch shall have the ability to cover and hold grass seed in contact with soil. The wood or grass straw fiber shall have moisture-absorption and percolation properties to form a blotter ground cover. Color the cellulose fiber green to visibly aid uniform application.

Approximate Acres: 3.75 acres of Hydroseeding.

Rates	Amounts
Total Seed Application Rate (lbs. Per Acre)	100
Approximate Total Grass Seed Amounts	375 lbs.
<i>Cellulose Fiber</i>	
Fiber Application Rate (lbs. Per Acre)	1,400
Approximate Total Fiber Amounts	5,250 lbs.
<i>Tackifier</i>	
Tackifier Application Rate (lbs. Per Acre)	50
Approximate Total Tackifier Amounts	187.5 lbs.
<i>Fertilizer</i>	
Chemical Analysis of 16-16-16	
Fertilizer Application Rate (lbs. Per Acre)	100
Approximate Total Fertilizer Amounts	375 lbs.

EXHIBIT M

GRASS SEEDING AND MULCHING

Dry Method. Hand-operated seeding devices may be used when seed is applied in dry form.

Apply grass seed and straw mulch to all waste areas.

Apply grass seed and mulch to all bare soils resulting from Project No. 3.

Applied straw mulch shall be a minimum of 2 inches deep and provide a uniform cover.

EXHIBIT N

SPECIFICATIONS FOR BRUSH AND SLASH SHOVEL PILING

Description of Work to be Done

Areas designated for work under the contract shall be treated according to the specifications given below:

Clearing - Brush, logging slash, and other debris shall be cleared from planting sites and piled in windrows or piled so that 80 percent or more of the soil organic layer is exposed. All woody vegetation (other than conifer trees) is defined as brush in this exhibit.

Piles - shall be located at least 75 feet apart and shall be no more than 75 feet long. Piles shall be located inside the project area designated for piling and shall be more than 75 feet from any edge or standing conifer tree. Piles shall be built to a height of 3 to 4 feet and then covered to prevent water from reaching the slash. STATE shall supply the materials used for covering the slash. Additional woody debris shall be piled on top of the covered piles to complete the piling, as directed by STATE. Logs and chunks which are suitable for firewood shall be piled separately from slash, near roads and landings and alongside the road in locations designated by STATE.

Conifer Trees - shall be saved, unless otherwise directed by STATE.

Skid Trails - shall be ripped to a depth of 12 inches.

Residual Logs - An average of 600 cubic feet of hard conifer logs per acre. Log shall contain a minimum of 10 cubic feet of volume and be no shorter than 6 feet in length. Two logs per acre shall be at least 24 inches in diameter, on the large end, where available. Hard conifer logs must be in decay class one or two as indicated by intact bark and original wood color. Trees or logs shall be left well distributed across the unit.

Protective Measures - shall comply with Oregon Forest Practice Rules issued per ORS 527.610 to 527.992. Examples of protective measures are: (1) waterbarring tractor trails where necessary to prevent runoff toward streams; (2) not windrowing in streams or streamways; and (3) leaving stream buffers along designated streams.

Work specifications may be modified or waived only upon written notice from STATE.

EXHIBIT N

SPECIFICATIONS FOR BRUSH AND SLASH SHOVEL PILING

Equipment Type, Equipment Operation, and Conduct of Work

The specifications given below are requirements for equipment type, equipment operation, and conduct of work under the contract.

Shovel - shall be a track-mounted machine with a ground-pressure rating of not more than 6.8 PSI and a net horsepower of 85 or more. The machine shall be capable of a minimum horizontal reach of 26 feet and a minimum vertical reach of 16 feet.

- Excavator-shovel: Bucket shall be a hydraulically controlled, 4 to 5-foot wide, "clamshell-style bucket with rake arms," with a 360-degree continuous rotation, and tooth length on rake arm shall be greater than 14 inches long, unless otherwise approved in writing by STATE. "Clamshell-style bucket with rake arms" shall be hydraulically controlled to operate bucket in a horizontal position (**fixed position: positive control**) for piling slash.
- Log Loader – shovel: Bucket shall be a hydraulically controlled, 4 to 5 foot wide, "clamshell-style bucket with rake arms," with a 360-degree continuous rotation, and tooth length on rake arm shall be greater than 14 inches long, unless otherwise approved in writing by STATE. "Clamshell-style bucket with rake arms" shall be hydraulically controlled to operate bucket in a vertical position (**free swinging**) for piling slash.

Equipment	Rate	Hours	Appraised Value
Excavator	\$ 120.00 / hour	41.3	\$ 4,956.00
Log Loader	\$ 87.50 / hour	56.6	\$ 4,956.00

Operator - must be experienced in operating similar equipment on land clearing operations, be able to operate the equipment proficiently, and pile the debris on the area as directed by STATE.

Support - including transport, other equipment, replacements, supplies, maintenance, and repairs shall be furnished as required to complete work; and shall be furnished without cost to STATE, other than as agreed under the contract terms.

Work Scheduling - work shall be accomplished only during dry weather conditions, and started within 14 calendar days after completion of yarding activities on Areas 1,4, 5 and 6. Operations shall provide for continual operation until contract work is completed, unless interrupted by poor weather, fire closures, or other uncontrollable circumstances. Equipment breakdowns shall be repaired without undue delay, and provision shall be made for replacement of equipment to prevent prolonged delays. Piling operation shall not be allowed when operations might damage sites or affect stream flows. Any exception to these instructions must be authorized in writing by STATE.

STATE Representative - shall provide directions for the conduct of work according to specifications.

PART IV: OTHER INFORMATION

State Timber Sale Contract
No. 341-06-38
Cole Mountain Combo

WRITTEN PLANS

FPA "Written Plan" for Operating within 100 Feet of Type F Streams Cole Mountain Combo

Portions of Sections 13, 14, 23, 24 and 26, T4N, R9W, W.M., Clatsop County, Oregon

Landowner: Oregon Department of Forestry
92219 Highway 202
Astoria, Oregon 97103
Phone: (503) 325-5451

Protected Resources:

1. Unnamed tributary to the North Fork of the Nehalem
2. Unnamed tributary to the North Fork of the Nehalem
3. Sally Creek
4. Unnamed tributary of Sally Creek
5. Unnamed tributary of Sally Creek

Specific Site Characteristics:

1. Unnamed tributary to the North Fork of the Nehalem (Small, Type F) – This stream flows along the western boundary of Area 1 for approximately 2,050 feet.
2. Unnamed tributary to the North Fork of the Nehalem (Small, Type F) - This stream flows along the south sale boundary of Area 6 for approximately 1,000 feet.
3. Sally Creek (Small, Type F) – This stream flows along the southeastern boundary of Area 2, the southern boundaries of Areas 3 and 5, and the northwestern boundary of Area 4 for approximately 2,250 feet.
4. Unnamed tributary of Sally Creek (Small, Type F) – This stream flows in between the southern portions of Areas 2 and 3, for approximately 550 feet.
5. Unnamed tributary of Sally Creek (Small, Type F) – This stream flows though Area 6 in a southwest direction for approximately 2,150 feet.

Tree and Vegetation Retention:

Vegetation within the buffers consists of a combination of conifers, hardwoods, and shrubs.

CLEARCUTS (Areas 3 and 4): All posted Type F buffers alongside clearcut units (modified-clearcuts) are posted at 100 feet. No tree or vegetation modification is anticipated in the FPA defined RMA zone.

PARTIAL HARVEST (Areas 1, 2, 5, and 6): All posted Type F buffers along or within partial cut units exceed 25 feet. The streamside tree retention within the FPA defined RMA width of 100 feet will range from 130 to 170 square feet of basal area per acre (minimum required basal for small, Type F stream is 50 square feet per acre).

During cable yarding operations, it is anticipated that cable skylines will cross all the above listed streams.

Resource Protection Practices:

Along all of the above mentioned streams, as well as any live streams, the following practices are required, under the timber sale contract, to protect the streams and streamside areas:

- No trees will be felled within posted stream buffers (RMA's) except were needed for corridors.
- Trees that fall or slide into Type F RMA's shall not be removed without prior approval from STATE.
- Trees adjacent to the posted stream buffers (RMA's) will be felled away from or parallel to the streams to prevent trees from entering the aquatic areas.
- When cable logging is conducted nearby the RMA's, logging lines may cross, but will not be lowered into the RMA's during yarding, except during rigging. During rigging the lines must be pulled out of the RMA's when changing corridors.
- Logs shall be fully suspended when yarding across all stream buffers (RMA's).
- Cable corridors must be at least 100 feet apart where they cross the RMA's.

I, the undersigned, submit this written plan in compliance with the requirements in the Forest Practice Act regarding the operations conducted within 100 feet of streams I agree to the protection measures listed in this plan.

Submitted by: _____
Operator/PURCHASER

Date: _____

Attachments: Logging Plan Map

Original: Salem

c: Operator, Purchaser, District file, Sunset Unit

FPA "Written Plan" for State Timber Sale Road Vacating Project
Cole Mountain Combo
Station 5+30 on V2 to V3

A Portion of Section 23, T4N, R9W, W.M., Clatsop County, Oregon

Landowner: Oregon Department of Forestry
92219 Hwy 202
Astoria, OR 97103
(503) 325-5451

Protected Resources: An unnamed tributary of Sally Creek (small, Type F stream).

Situation: A 48 inch diameter culvert on an existing road is deteriorating. Changes to the access routes into the adjacent area have allowed for the permanent removal of this culvert and fill.

Drainage Area:

- The stream crossing drainage area is approximately 95 acres.
- The 50 year peak flow per square mile is 400 cfs.
- The 50 year peak flow for this drainage is 59 cfs.
- Stored stream sediment for 15 feet above the old culvert inlet will be removed to restore the stream channel.

Resource Protection Measures:

- Work will be performed only during dry weather periods, low water stream flows and between July 1 and September 15, annually.
- Machine activity in stream channels will be minimized. All excavation will be performed using a minimum 1½ cubic-yard track-mounted excavator.
- De-watering of the installation area during removal of the culvert and old stream sediment will be required, and may be accomplished by use of coffer dams, temporary diversion ditches, or drainage structures and/or damming and pumping.
- Excavated waste materials will be hauled to an approved waste area, compacted and left in a stable condition.
- All bare soils shall be mulched with a straw and grass seed approved by STATE. Applied mulch shall be a minimum of 3 inches deep and provide a uniform cover.
- Oil spill response materials will be on the project site.

I, the undersigned, submit this written plan in compliance with the requirements in the Forest Practices Act regarding the operations conducted when, working within 100 feet of a Type F stream. I agree to the protection measures listed on this plan:

Submitted by: _____
Operator/Purchaser

Date: _____

Attachment: Exhibit "A" (page 3)

c: Landowners, Operator, Purchaser, District file, Salem, Eng. Unit, Sunset Unit

FPA "WRITTEN PLAN" For State Timber Sale Culvert Replacement Project Cole Mountain Combo

A Portion of the SW ¼, Section 7, T4N, R8W., W.M., Clatsop County, Oregon

Landowner: Oregon Department of Forestry
92219 Hwy 202
Astoria, OR 97103
(503) 325-5451

Protected Resources:

A small Type F stream on the East Fork of Hakura Creek. A "written plan" is required for any activities within 100 feet of any Type F stream.

Situation:

An existing culvert stream crossing structure, located on Cole Mountain Road at Station 101+28 is undersized and in a deteriorating condition. Two large Sitka Spruce trees at the inlet of the culvert are restricting the stream channel. The existing structure is a partial blockage to fish passage upstream.

Drainage Area and Stream Crossing Design:

The existing culvert will be replaced with a 96" x 98", 12 gauge aluminized steel round culvert pipe, embedded 38.4", with both ends step beveled. The stream crossing will utilize a streambed simulation strategy and preserve a natural stream channel (waterway), a minimum of 8 feet wide. The stream crossing meets and exceeds the requirements of the FPA for type F stream crossings. It will take sufficient time and flow conditions for the predicted stream bed to develop inside and above the stream crossing. The new fill height will be 20'.

- Existing Stream Gradient: 4%
- Size of Watershed: 110 acres
- Developed Waterway Width: 8 feet
- Stream Bed Materials: Fines, Gravel, Cobbles
- 50 - Year Peak Flow/Mile²: 400 cfs
- 50 - Year Peak Flow: 69 cfs
- Flow Capacity of Structure: 220 cfs

Resource Protection Measures:

- Machine activity in stream channels will be minimized.
- In stream work shall be conducted during periods of low water flows and between July 1 and September 5, annually.
- Minimum 1½ cubic yard track mounted excavator type equipment shall be used for embankment excavation, stream channel development and riprap placement.
- Excavated embankment materials will be hauled to approved waste areas, sloped for drainage and left in a stable condition.
- Erosion control measures shall be applied to all exposed excavation areas, bare soils and waste materials.
- Riprap rock will be used to armor embankments and stream banks.
- Native (excavated) stream sediment materials (cobble) shall be placed in the culvert barrel to facilitate the development of the stream channel inside the barrel of the pipe arch culvert.
- Excavated boulders or riprap rock shall be placed and embedded in the culvert barrel and at the outlet of the new culvert to allow additional stream sediment materials to settle in the barrel of the culvert and to prevent the flushing of placed material.
- The de-watering of the installation area during development of the pipe arch bed and stream channel will be accomplished by use of cofferdams, temporary diversion ditches, and/or drainage structures. De-watering once begun will be continual until such time that the stream has been released into the new culvert.
- Oil spill response materials will be on the project site.

FPA "WRITTEN PLAN" For State Timber Sale Culvert Replacement Project
Cole Mountain Combo

I, the undersigned, submit this written plan in compliance with the requirements in the Forest Practices Act regarding the operations conducted within 100 feet of Type F streams. I agree to the protection measures listed on this plan:

Submitted by: _____
Operator/PURCHASER

Date: _____

Attachments: Exhibits A (page 3)
Exhibit H (4 pages).

OREGON DEPARTMENT of FISH and WILDLIFE

FISH SCREENING PROGRAM

SMALL PUMP SCREEN SELF CERTIFICATION

The Oregon Water Resources Department in coordination and cooperation with the Oregon Department of Fish and Wildlife includes screen requirements on pumps to protect fish as a condition of many surface water and/or reservoir water right permits. This is done in accordance with ORS 537.153.

The Oregon Department of Fish and Wildlife does not usually inspect small pump screens at pumped diversions less than 225 GPM (Gallons per Minute), but furnishes the following fish screening criteria information to the water right permit tee:

Screen material open area must be at least 27% of the total wetted screen area.

Perforated plate: Openings shall not exceed 3/32 or 0.0938 inches (2.38 mm).

Mesh/Woven wire screen: Square openings shall not exceed 3/32 or 0.0938 inches (2.38mm) in the narrow direction, e.g., 3/32 inch x 3/32 inch open mesh.

Profile bar screen/Wedge wire: Openings shall not exceed 0.0689 inches (1.75 mm) in the narrow direction.

Screen area must be large enough to cause fish impact. Wetted screen area depends on the water flow rate and the water approach velocity. **Approach velocity** is the water velocity perpendicular to and approximately three inches in front of any part of the screen face.

An Active pump screen is a self cleaning screen that has a proven cleaning system. The **screen approach velocity for active pump screens** shall not exceed 0.4 fps (feet per second) or 0.12 mps (meters per second). The wetted screen area in square feet is calculated by dividing the maximum water flow rate in cubic feet per second (1 cfs = 449 gpm) by 0.4 fps.

A Passive pump screen is a screen that has no cleaning system other than periodic manual cleaning. **Screen approach velocity for passive pump screens** shall not exceed 0.2 fps or 0.06 mps. The wetted screen area in square feet is calculated by dividing the maximum water flow rate by 0.2 fps.

For further information on fish screening please contact:

Bernie Kepshire, Oregon Department of Fish and Wildlife,
7118 NE Vandenberg Avenue, Corvallis, OR 97330-9446 (541) 757-4186 x 255

As evidence of having met fish screen installation requirements, please sign the certification and send to: Oregon Water Resources Department, Water Rights Section, 725 Summer St. NE, Suite A, Salem, OR 97301-1271

Certification: I certify that my small pumped diversion of less than 225 gpm meets fish screening criteria, and that I will maintain it to comply with regulatory criteria. I also understand that should fish screening standards change, I may be required to modify my installation to meet applicable standards.

Applicant Signature:

Date: / / WRD File #

Printed Name and Address:

Phone: ()

Fax: ()

bmK

3/11/99

PUMPCERT.doc

NB: ODFW logo is 129% of logo on HQ mail label