



Oregon Department of Forestry
 2600 State St Salem OR 97310

PART III: EXHIBITS

EXHIBIT B

TIMBER SALE OPERATIONS PLAN

(See page 2 for instructions)

Date Received by State: _____

(5) State Brand Information (Complete)

(1) Contract Number: AT-341-2024-W00984-01

(2) Sale Name: Humptys Wall

(3) Contract Expiration Date: 06/30/2027

(4) Purchaser Name: _____

(6) State Representatives:

<u>Name</u>	<u>Circle One</u>	<u>Phone No.</u>	<u>Cell No.</u>	<u>Alt Phone</u>
	Logging Projects All			
	Logging Projects All			
	Logging Projects All			
	Logging Projects All			

(7) Purchaser Representatives:

<u>Name</u>	<u>Circle One</u>	<u>Phone No.</u>	<u>Cell No.</u>	<u>Alt Phone</u>
	Logging Projects All			
	Logging Projects All			
	Logging Projects All			
	Logging Projects All			
	Logging Projects All			
	Logging Projects All			
	Logging Projects All			

(8) Name of Subcontractors and Start Dates:

<u>Project No.</u>	<u>Subcontractor Name.</u>	<u>Start Date</u>	<u>Completion Date</u>	<u>Cell No.</u>	<u>Alt Phone</u>

	<u>Subcontractor Name.</u>	<u>Start Date</u>	<u>Cell No.</u>	<u>Alt Phone</u>
FELLING				
YARDING				

(9) Comments:

(10) Operations Map: Attach a copy of timber sale Exhibit A or other suitable map which plainly shows the items listed on the instruction sheet.



Oregon Department of Forestry

2600 State St Salem OR 97310

PART III: EXHIBITS

EXHIBIT B







INSTRUCTION SHEET FOR OPERATIONS PLAN

SUBMIT ONE COPY OF PLAN STATE

Operations shall be limited to the work shown in the plan until a revised plan or supplemental plan is submitted covering additional work. Compliance with this plan is not in lieu of compliance with any federal requirements related to the federal Endangered Species Act including without limitation PURCHASER'S independent obligation to avoid take of a T&E species and PURCHASER'S obligation to comply with terms and conditions of any incidental take Permit(s) that include required minimization and mitigation measures in any applicable Habitat Conservation Plan. If STATE has prepared a required Forest Practices Act (FPA) "Written Plan" for operations, PURCHASER shall comply with all provisions of the Written Plan.

Explanation of Item No.(from Page 1)

- (5) All sales require you to use a brand furnished by STATE. If the State brand has not been assigned when the plan is submitted, it will be furnished and assigned later. Complete drawing. If more than one brand is assigned to the sale, complete both drawings.
- (6) The contract requires you to have a designated representative available on the sale area or work location who is authorized to receive in your behalf any notice or instruction given by STATE and to take action in regard to performance under the contract. If logging and project work is widely separated, a representative is required for each.
- (7) The STATE representative will be designated when your plan is approved and is the person who will inspect and issue instructions regarding performance.
- (8) Show names of subcontractors to be used for any or all phases of the operations. If subcontractors are not Known, or are changed later, give notification to the STATE representative prior to commencement of work by subcontractor.
- (9) Show projected dates for commencement of both projects and logging. If projected dates need to be changed at a later date, notification must be given to the STATE representative by supplemental plan or otherwise, prior to commencement of such operations.
- (10) The STATE representative will furnish extra copies of Exhibit A of the contract for your use in preparing the operations map. The map shall use the following legend and show:
 1. Landing locations, approximate setting boundaries, and probable sequence of logging the settings. Number the settings in sequence.
 2. Locations of spur roads planned for construction, other than required by the timber sale contract. Provide spur road specifications
 3. Locations of proposed tractor yarding roads. Show if and how marked on the ground.
 4. Locations of temporary stream crossings.
 5. List the sequence of performing project work.
 6. Location of rock sources - attach pit development plans.



	Cable Landing, with numbers for sequence.
	Tractor Landing with alphabetical sequence.
	Approximate setting boundary.
	Spur truck roads.
	Tractor yarding roads.
	Temporary stream crossings.



Oregon Department of Forestry
 2600 State St Salem OR 97310
 PART III: EXHIBITS
EXHIBIT B
OPERATIONS PLAN

Completion Timeline

Indicate on the appropriate timeline below, the dates by which you plan to complete the work as required under this contract. The purpose of this section is to develop a plan that will ensure you complete the work as required, and meet the interim completion date(s) and contract expiration date. This plan is incorporated and made a part of the contract. When, in the opinion of STATE, operations are not commencing in a manner that meets the intent of this plan, you may be placed in violation of contract and your operations suspended until an amended plan is submitted and approved by STATE.

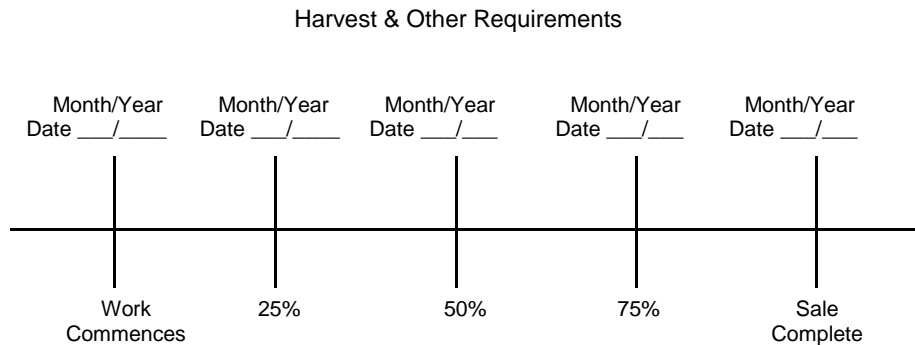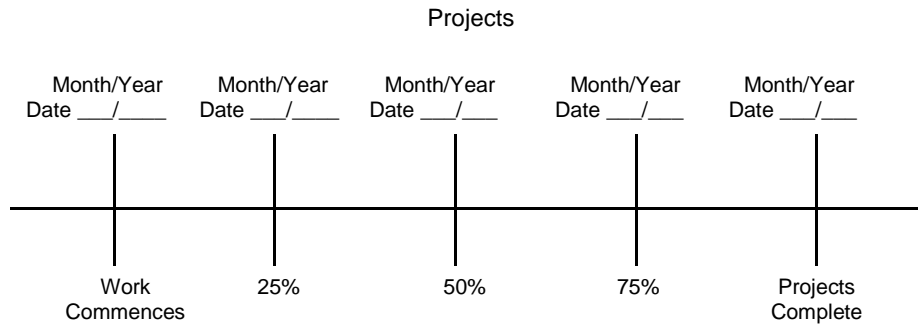

The Federal Endangered Species Act (ESA) prohibits a person from taking any federally listed threatened or endangered species. Taking under the federal ESA may include alteration of habitat. STATE's approval of this plan does not certify that PURCHASER's operation under the plan is lawful under the federal ESA or that the plan is consistent with the terms and conditions of any applicable incidental take Permit(s) including any required minimization and mitigation measures proposed in the applicable Habitat Conservation Plan. As provided in the timber sale contract, PURCHASER's must comply with all applicable state, federal, and local laws, including without limitation any Permit(s) issued thereunder.

PURCHASER's compliance with this plan is not in lieu of compliance with any federal requirements related to the federal Endangered Species Act.

APPROVED; Date: _____

SUBMITTED BY:
PURCHASER

STATE OF OREGON - DEPARTMENT OF
FORESTRY

Title _____

Title _____



Oregon Department of Forestry
EXHIBIT C - SAWMILL GRADE (WESTSIDE SCALE)
SCALING INSTRUCTIONS - LOCATION APPROVAL - BRAND INFORMATION
 Astoria - NWOA

(1) ORIGINAL REGISTRATION Date _____
 REVISION NUMBER 000 Date _____
 CANCELLATION Date _____

(2) TO: _____
 (Third Party Scaling Organization)

(3) FROM: Astoria _____ Phone (503) 325-5451
 (State Forestry District)
 Address: 92219 HWY 202
ASTORIA, OR 97103

(4) PURCHASER: _____
 Mailing Address: _____

 Phone Number: _____

(5) MINIMUM SCALING SPECIFICATIONS	
SPECIES	MINIMUM NET VOLUME
Conifers	10
Hardwoods	10

*Apply minimum volume test to whole logs over 40' Westside

(6) WESTSIDE SCALE: _____
 Use Region 6 actual taper rule. Logs over 40'.

(7) Weight Scale Sample YES NO


(8) APPROVED SCALING LOCATIONS <small>(as shown on the ODF Approved Locations web-site)</small>	Species	Yard	Truck	Weight

(9) **SALE NAME:** Humptys Wall
COUNTY: Clatsop

(10) **STATE CONTRACT NUMBER:**
AT-341-2024-W00984-01

(11) **STATE BRAND REGISTRATION NUMBER:**

(12) **STATE BRAND INFORMATION:**



(13) **PAINT REQUIRED:** YES
COLOR: Orange

(14) SPECIAL REQUESTS (Check applicable)	
PEELABLE CULL (all species).....	<input checked="" type="checkbox"/>
NO DEDUCTIONS ALLOWED FOR MECHANICAL DAMAGE	<input checked="" type="checkbox"/>
ADD-BACK VOLUME - Deductions due to delay...	<input checked="" type="checkbox"/>
OTHER :	

(15) **REMARKS:**
 "Mule Trains"
 1. Loads are required to have load tickets for each set of bunks.
 2. If truck and pup are to be weighed, weigh and process separately for gross and tare weights.

Operator's Name (Optional inclusion by District): _____

(16) **SIGNATURES:**

 Purchaser or Authorized Representative Date

 State Forester Representative Date

 State Forester Representative PRINT NAME

Notify the District within one hour when branding or painting is inadequate for quick identification, the receipts are missing, not correctly or completely filled out, and/or when logs presented for scaling are impossible to scale accurately.



Oregon Department of Forestry
EXHIBIT C - SAWMILL GRADE
INSTRUCTIONS FOR EXHIBIT C
Astoria - NWOA

(1) Check appropriate box. REVISION NUMBER requires comments. CANCELLATION requires logging and hauling to be complete, recall branding hammers.

(2) Designate Third Party Scaling Organization (TPSO).

Columbia River Log Scaling & Grading Bureau
P.O.Box 7002, Eugene, OR 97401
Phone: (541) 342-6007 Fax: (541) 342-2631
Email: services@crls.com

Pacific Rim Log Scaling Bureau, Inc.
8288 28th Court North East, Lacey, WA 98516
Phone: (360) 528-8710 Fax: (360) 528-8718
Email: office@prlsb.com

Mountain Western Log Scaling & Grading Bureau
P.O.Box 580, Roseburg, OR 97470
Phone: (541) 673-5571 Fax: (541) 672-6381
Email: info@mwlsgb.com

Yamhill Log Scaling & Grading Bureau
P.O.Box 709, Forest Grove, OR 97116
Phone: (503) 359-4474 Fax: (503) 359-4476
Email: yamhilllog@frontier.com

Northwest Log Scalpers Inc.
6137 NE 63rd St, Vancouver, WA, 98661
Phone: (360) 553-7212 ext. 4 Fax:(360) 553-7213
Email: info@nwlogscalpers.com

(3) State District office, address and phone.

(4) Enter Purchaser's business name, address, and phone number as it appears on the Contract.

(5) Minimum Scaling Specifications.

(6) Westside - Region 6 actual taper segment scale. Check Yes or No. Special Service Rules on file with TPSO. See: Segment Scaling and Grading of Long Logs - All Species - State Forestry Department Scaling Practices (Westside).

(7) Weight Scale Sample - Check box if sale is to be a Weight Scale Sample. All specifics for handling, scaling and processing will be attached or explained in the Remarks section item (15).

(8) Show scaling locations only applicable to TPSO. Location name should appear as it does on the ODF Approved Scaling Location web site: https://apps.odf.oregon.gov/Divisions/management/asset_management/scalinglocation.asp Locations with scaling and processing directions specific to their location should be on a separate form. Species should be identified if not capable of receiving "all" species. Check appropriate box for either: yard, truck scale, or weight. Refer to the web site listed above for the locations approval status.

(9) Enter sale name and county.

(10) Enter sale Contract number.

(11) Enter Oregon's State Brand Registry Number (**REQUIRED**).

(12) Show brand assigned to timber sale. One brand only. If more than one brand is assigned to the sale: (1) make a separate form for each brand and (2) on each form, explain and show other brand(s) in the Remarks section item (15).

(13) Check yes for Paint Required and designate "Orange" for color. Non required removal volumes may sometimes require blue paint.

(14) Special Requests. These are requests that will be applied to ODF timber sales. All boxes applicable to the timber sales designated in the Exhibit C form must be "marked". If "Other" is indicated, it must contain a description and any necessary comments.

(15) Use this space to designate any weight scale sample instructions or any other explanations to clarify scaling, processing and/or mailing requirements. If additional scaling locations are approved, revise original or current form showing all (old and new) locations. Check REVISION box at top of form and explain under remarks. Route as indicated.

(16) Require purchaser to sign and date completed form in addition to State Forester Representative, sign and print name on the form. Signatures not required on revisions.



**Oregon Department of Forestry
 EXHIBIT C - PULP SORT
 PROCESSING INSTRUCTIONS - LOCATION APPROVAL
 BRAND INFORMATION**

Astoria, NWOA

(1) ORIGINAL REGISTRATION Date _____
 REVISION NUMBER 000 Date _____
 CANCELLATION Date _____

(2) TO: _____
 (Approved Pulp Processing Facility)

(3) FROM: Astoria Phone (503) 325-5451
 (State Forestry District)
 Address: 92219 HWY 202
ASTORIA, OR 97103

(4) PURCHASER: _____

(5) Scaling Bureau (TPSO) Processing Weight receipts:

Mailing Address: _____

Phone Number: _____


(9) SALE NAME: Humptys Wall

COUNTY: Clatsop

(10) STATE CONTRACT NUMBER:
AT-341-2024-W00984-01

(11) STATE BRAND REGISTRATION NUMBER: _____

(12) STATE BRAND INFORMATION:



(13) REMARKS:
 "Mule Trains"
 1. Loads are required to have load tickets for each set of bunks.
 2. Truck and pup are to be weighed and processed separately for gross and tare weights.

Operator's Name (Optional inclusion by District):

(14) SIGNATURES:

 Purchaser or Authorized Representative Date

 State Forester Representative Date

 State Forester Representative PRINT NAME

(6) STATE Definition of Approved Pulp Sort:
 • Top portion of the tree (tops).
 • All logs with a diameter (Big End) greater than 8 inches marked with blue paint.

(7) PULP FACILITY PROCESSING INSTRUCTIONS:
 • Pulp loads shall be weighed in lieu of scaling.
 • One Ton = 2000 lbs (Short Ton).
 • Pulp loads shall have a yellow Log Load Receipt attached.
 • Gross weight and truck tare weight for each load shall be machine printed on the weight receipt.
 • Weigher shall sign the weight receipt.
 • Weigher shall record the Log Load Receipt number on the weight receipt.
 • Weigher shall attach the Weight receipt to the Log Load Receipt and mail them weekly to the TPSO processing the Weight receipt.

(8) TPSO PROCESSING INSTRUCTIONS
 • Submit data files daily (or each day of activity).
 • Mail or deliver scale tickets weekly to ODF Headquarters in Salem.

Notify the District within one hour when branding is inadequate for quick identification, the logs are marked with orange paint, the receipts are missing, not correctly or completely filled out, and/or logs do not meet the specifications of the STATE definition of Approved Pulp Sort.

General Distribution: TPSO, Approved Scaling Locations and Purchaser.



**Oregon Department of Forestry
EXHIBIT C - PULP SORT
INSTRUCTIONS FOR EXHIBIT C**

Astoria, NWOA

- (1) Check appropriate box. REVISION NUMBER requires comments. CANCELLATION requires logging and hauling to be complete, recall branding hammers.
- (2) Approved Pulp Processing Facility. Write in as written in the Approved Log Delivery Location https://apps.odf.oregon.gov/Divisions/management/asset_management/scalinglocation.asp
- (3) State District office, address and phone.
- (4) Enter Purchaser's business name, address, and phone number as it appears on the Contract.
- (5) Third Party Scaling Organization that will be processing the weight tickets, mailing address, and phone number.

Columbia River Log Scaling & Grading Bureau
P.O.Box 7002, Eugene, OR 97401
Phone: (541) 342-6007 Fax: (541) 342-2631
Email: services@crls.com

Pacific Rim Log Scaling Bureau, Inc.
8288 28th Court North East, Lacey, WA 98516
Phone: (360) 528-8710 Fax: (360) 528-8718
Email: office@prlsb.com

Mountain Western Log Scaling & Grading Bureau
P.O.Box 580, Roseburg, OR 97470
Phone: (541) 673-5571 Fax: (541) 672-6381
Email: info@mwlsgb.com

Yamhill Log Scaling & Grading Bureau
P.O.Box 709, Forest Grove, OR 97116
Phone: (503) 359-4474 Fax: (503) 359-4476
Email: yamhilllog@frontier.com

Northwest Log Scalars Inc.
6137 NE 63rd St, Vancouver, WA, 98661
Phone: (360) 553-7212 ext. 4 Fax:(360) 553-7213
Email: info@nwlogscalars.com

- (6) Big end of log is not to exceed 2 inches greater than the minimum removal specifications in the contract. Example: Minimum removal specifications 6 inches and 20 board feet, then the Big end of log not to exceed 8 inches. When conifer and hardwood removal specifications are different, use the smaller removal diameter to determine this specification.
- (9) Enter sale name and county.
- (10) Enter sale Contract number.
- (11) Enter Oregon's State Brand Registry Number **(REQUIRED)**.
- (12) Show brand assigned to timber sale. One brand only, if more than one brand is assigned to the sale: (1) make a separate form for each brand and (2) on each form, explain and show other brand(s) in the Remarks section Item (13).
- (13) Use this section to list any special instructions or the reason for any revisions in section item (1).
- (14) Require purchaser to sign and date completed form in addition to State Forester Representative, sign and print name on the form. Signatures not required on revisions.

EXHIBIT D

FOREST ROAD SPECIFICATIONS

SUBGRADE WIDTH	SURFACED WIDTH	POINT TO POINT	STATION TO STATION	DRAINAGE
14 feet	N/A	2A to 2B	0+00 to 1+80	Outsloped
16 feet	12 feet	2C to 2D	0+00 to 1+55	Crowned/Ditch
16 feet	12 feet	3A to 3B	0+00 to 3+10	Crowned/Ditch
16 feet	12 feet	3C to 3D	0+00 to 2+60	Crowned/Ditch
16 feet	12 feet	3E to 3F	0+00 to 1+30	Crowned/Ditch
N/A	N/A	3G	N/A	Outsloped
16 feet	12 feet	3H to 3I	0+00 to 9+50	Crowned/Ditch
16 feet	12 feet	I1 to I2	0+00 to 293+30	Crowned/Ditch
16 feet	12 feet	I3 to I4	0+00 to 20+60	Crowned/Ditch
16 feet	12 feet	I5 to I6	0+00 to 15+30	Crowned/Ditch
16 feet	12 feet	I7 to I8	0+00 to 10+70	Crowned/Ditch
16 feet	12 feet	I9 to I10	0+00 to 2+30	Crowned/Ditch
16 feet	12 feet	I11 to I12	0+00 to 95+10	Crowned/Ditch
16 feet	12 feet	I13 to I14	0+00 to 8+50	Crowned/Ditch
16 feet	12 feet	I15 to I16	0+00 to 2+90	Crowned/Ditch
16 feet	12 feet	I17 to I18	0+00 to 5+50	Crowned/Ditch
16 feet	12 feet	I19 to I20	0+00 to 21+00	Crowned/Ditch

CLEARING. This work shall consist of clearing, removing, and disposing of all trees, Snags, Down Timber, brush, surface objects, and protruding obstructions within the clearing limits.

All danger trees, leaners, and Snags outside the clearing limits which could fall and hit the road shall be felled.

CLEARING CLASSIFICATION.

New Construction - Where clearing limits have not been marked, the clearing limits shall extend 5 feet back of the top of the cutslope and 5 feet out from the toe of the fill slope, or as directed by STATE.

Improvement - Where clearing limits have not been marked, the clearing limits shall extend 5 feet back of the top of the cutslope and 10 feet out from the toe of the fill slope, or as directed by STATE.

GRUBBING. This work shall consist of the removal or digging out of stumps and protruding objects.

All stumps shall be completely removed within the limits of required grubbing. Stumps overhanging cutslopes shall be removed. Grubbing debris shall not be placed or permitted to remain in or under any road embankment sections.

EXHIBIT D

FOREST ROAD SPECIFICATIONS

GRUBBING CLASSIFICATION.

New construction - from the top of the cutslope to the toe of the fill.

Improvements and reconstructions - 4 feet back from the shoulder of the subgrade or ditch, whichever is widest, or as marked in the field.

CLEARING AND GRUBBING DISPOSAL. Clearing and grubbing debris shall not be placed or permitted to remain in or under any road embankment sections. Clearing and grubbing debris shall be left in a stable location, and not left lodged against standing trees. Clearing and grubbing debris may be scattered through openings in the timber outside of the cleared right-of-way, except for the following areas where debris shall be fully contained and hauled to a designated waste area:

- Where end-haul is required
- On side slopes exceeding 50 percent
- On unstable areas
- In any stream channel (Type F, N or D) or where material may enter the stream channel.

Clearing, grubbing, and associated disposal shall be completed prior to subgrade approval.

EXCAVATION. Excavation and grading shall not be done when weather and/or ground conditions are such that damage will result to existing subgrade or cause excessive erosion.

Excavation shall conform to STATE-specified lines, grades, dimensions, and plans when provided. Plans are provided between points: (3A to 3B, 3C to 3D, 3H to 3I).

Unless road plans show otherwise, all roads shall be on a balanced cross section, except when the slope is over 50 percent, the road shall be on full bench for the width specified.

Suitable excavated material shall be used for the formation of fills, shoulders, and drainage structure backfills. Embankment materials shall be free of woody debris, brush, muck, sod, frozen material, and other deleterious materials.

Sidecast includes any road generated excess excavation material which is not essential as part of the road prism, is not compacted, and is below the roadway. Sidecast shall not be placed where it will enter a stream course. Leaving sidecast below the road is only permissible if specifically allowed in "Full Bench and End Haul Requirements" in this Exhibit.

All fills shall be machine compacted according to the "Compaction and Processing Requirements" in this Exhibit.

ROAD WIDTH LIMITATIONS. PURCHASER shall obtain advance written approval from STATE to construct the road to a greater width than specified. Extra subgrade width shall be required for:

Fill Widening. Add to each fill shoulder 1 foot for fills 3 feet to 6 feet high; 2 feet for fills over 6 feet high.

Curve Widening. Widen the inside shoulder of all curves as specified in the plans or as follows: 400 divided by the radius of the curve equals the amount of extra width.

DRAINAGE

Subgrade. Subgrade shall be crowned, outsloped, or insloped at 4 to 6 percent as shown on the "Forest Road Specifications" table in this Exhibit.

Ditch. Construct V shaped ditch 3 feet wide and to a depth of 1 foot below subgrade.

Ditchouts. Construct ditchouts to drain away from subgrade at locations marked in the field or as directed by STATE.

EXHIBIT D

FOREST ROAD SPECIFICATIONS

TURNOUTS. Increase roadbed width an additional 8 feet for both subgrade and surfacing. Length shall be at least 50 feet, or as staked on the ground, plus 25-foot approaches at each end.

Location: Intervisible but not greater than 750 feet apart and as marked in the field.

<u>SLOPES</u>	<u>Cutslopes</u>	<u>Fill Slopes</u>
Solid Rock	Vertical to $\frac{1}{4}$:1	
Fractured Rock	$\frac{1}{2}$:1	
Soil - side slopes 50% and over	$\frac{3}{4}$:1	$1\frac{1}{2}$:1
Soil - side slopes less than 50%	1 :1	$1\frac{1}{2}$:1

Top of cutslope shall be rounded.

LANDINGS. Landings shall be constructed as posted in the field, no less than 50 feet wide and no more than 70 feet wide unless otherwise approved by STATE. Surface is to be crowned for drainage with general grade no more than 3 percent. Surface as shown in the "Road Surfacing" table in this Exhibit.

TURNAROUNDS. Increase subgrade width an additional 20 feet for a length of 20 feet at locations marked in the field.

SEASONAL WINTERIZATION. All unsurfaced roads or unfinished subgrades shall be waterbarred in accordance with the specifications in Exhibit H and blocked from vehicular traffic prior to October 1, annually and as directed by STATE.

EXHIBIT D

FOREST ROAD SPECIFICATIONS

GENERAL ROAD CONSTRUCTION INSTRUCTIONS:

1. Timber Removal. Remove all trees within posted Right-of-Way Boundary or individually marked with an orange "C", as specified in Section 2210, Designated Timber.
2. Excavated Materials. Excavated materials shall be utilized for road construction and hauled in where necessary. Surplus excavation materials shall be hauled to the waste areas as marked in the field and/or designated on Exhibit A. Surplus excavated materials and waste materials shall be sloped and compacted for drainage. Fills shall be thoroughly compacted in accordance with this Exhibit. Excess excavated material not used for embankment shall be sidecast on slopes up to 50 percent end hauled or pushed to waste areas as shown on Exhibit A and marked in the field.
3. Drainage Ditches. Construct ditchlines, including ditchouts, as directed by STATE. Cutslopes of ditchlines and ditchouts shall not exceed a 1:1 slope. Construct culvert sediment basins. Waste materials from drainage ditches and sediment basins shall be placed in nearby waste areas and uniformly sloped and compacted for drainage, as directed by STATE.
4. Rock Ditch Filter. Construct rock ditch filters as directed by STATE. Excavate a one foot deep, tapered sump on the upslope side, adjacent to the rock ditch filter. Excavated material shall be hauled to the designated waste areas as marked in the field and/or designated on Exhibit A. Waste materials shall be sloped and compacted for drainage. Construct each rock ditch filter with clean drain rock (6"-4" pit-run rock) and placed at a 2:1 slope within the specified ditch. Construct the center of the rock ditch filter at least 6 inches lower than the ends, to act as a spillway for runoff and to prevent water from flowing around the filter. Space the filters so that the bottom elevation of the upper filter is the same as the top center elevation of the next filter. Rock ditch filter dimensions shall be as shown on the "Typical Rock Ditch Filter" exhibit or as directed by STATE. Locations of the filters shall be determined by STATE.
5. Culvert Installation. Culverts in live streams shall be installed with the inlet and outlet on grade with the stream bottom, unless otherwise specified in writing. Fill construction backfill shall consist of select materials and may be obtained from borrow pits, as directed by STATE. Backfill materials shall be hauled in where necessary and thoroughly compacted in accordance with this Exhibit. STATE may require the use of crushed rock for culvert bedding.
6. Fill Armor and Energy Dissipator Construction. Where rock is specified for fill armor, rock shall be machine placed and tamped at a 1½:1 slope, beginning at the toe of the fill. Where rock is used for an energy dissipator, rock shall be placed below the culvert outlet and embedded for a minimum of 3 feet, in accordance with Exhibit G.
7. Equipment. All excavation and riprap placement shall be performed using a minimum 1½ cubic-yard, track-mounted excavator.
8. Subgrade Preparation and Application of Surfacing Rock.
 - (a) Complete culvert installations, drainage ditches, ditchouts, fill construction, and other specified work prior to the application of surfacing rock.
 - (b) Subgrade shall be crowned, outsloped, or insloped at 4 to 6 percent.
 - (c) Upon completion of above required work, apply, process, and compact surfacing rock in accordance with specifications in the "Compaction and Processing Requirements" in this Exhibit. Final road surface shall be crowned, outsloped, or insloped at 4 to 6 percent.

EXHIBIT D
FOREST ROAD SPECIFICATIONS

SPECIFIC ROAD CONSTRUCTION INSTRUCTIONS

<u>Segment</u>	<u>Station</u>	<u>Work Description</u>
2C to 2D	0+00	Install 18"x50' CPP culvert.
	1+55	Construct landing.
3A to 3B	0+00	Begin full bench construction. Begin cutslope rounding. End haul excess waste material to the designated waste areas.
	3+10	End full bench construction. End cutslope rounding. Construct landing.
3C to 3D	0+00	Begin cutslope rounding.
	2+60	Construct landing. End cutslope rounding.
3E to 3F	1+30	Construct landing.
3G	N/A	Construct landing.
3H to 3I	0+40	Install 18"x30' CPP culvert.
	1+50	Construct waste area.
	2+50	Begin full bench construction. Begin cutslope rounding. Utilize excess waste material on new road or end haul to the designated waste areas.
	2+65	Construct turnout.
	5+25	Install 18"x30' CPP culvert.
	5+50	End full bench construction. End cutslope rounding. Construct landing.
	6+50	Install 18"x50' CPP culvert.
	7+50	Construct turnaround.
	9+50	Construct turnout.

EXHIBIT D
FOREST ROAD SPECIFICATIONS

GENERAL SALE ACCESS ROAD IMPROVEMENT, SURFACE ROCK REPLACEMENT, AND ROAD MAINTENANCE INSTRUCTIONS:

1. Timber Removal. Remove all trees within posted Right-of-Way Boundary or individually marked with an orange "C", as specified in Section 2210, Designated Timber.
2. Excavated Materials. Excavated materials shall be utilized for road and fill construction and hauled in where necessary. Surplus excavation materials shall be hauled to the waste areas as marked in the field and/or designated on Exhibit A. Surplus excavated materials and waste materials shall be sloped and compacted for drainage. Fills shall be thoroughly compacted in accordance with this Exhibit. Excess excavated material not used for embankment shall be end hauled or pushed to waste areas as shown on Exhibit A and marked in the field.
3. Culvert Replacement, Culvert Installation, Fill Reconstruction, and Fill Removal. Existing culvert geometry shall be modified to provide for optimum drainage and culvert performance. Modifications may include, skewing the culvert and/or installing the culvert at gradients equal to or exceeding the drainage or ditch gradient. Where fill reconstruction or culvert replacement is specified, fills shall be excavated to natural stream course levels. All woody debris encountered during fill excavation shall be removed. Fill reconstruction backfill shall consist of select materials and may be obtained from borrow pits, as directed by STATE. Unsuitable backfill material shall be hauled to the designated waste areas as marked in the field and/or designated on Exhibit A. Backfill materials shall be hauled in where necessary and thoroughly compacted in accordance with this Exhibit.
4. Culvert Cleaning and Repairs. Remove all debris from inside all existing culverts on the road improvement segment, as directed by STATE. Damaged culvert inlets and/or outlets shall be repaired by opening them with a hydraulic jack or cutting off the culvert end to allow for free passage of water at peak flow level.
5. Drainage Ditches and Debris Removal. Restore or construct ditchlines, including ditchouts, and remove debris from cutbanks, fill slopes and the road prism, as directed by STATE. Clean out all culvert inlets and outlets for a 10-foot radius. Re-establish or construct culvert sediment basins. Waste materials from drainage ditches and sediment basins, cutbanks, fill slopes and the road prism shall not be pulled across existing surfacing rock, but shall be placed in nearby waste areas.
6. Rock Ditch Filter. Construct rock ditch filters as directed by STATE. Excavate a one foot deep, tapered sump on the upslope side, adjacent to the rock ditch filter. Excavated material shall be hauled to the designated waste areas as marked in the field and/or designated on Exhibit A. Construct each rock ditch filter with clean drain rock (6"-4" pit-run rock) and placed at a 2:1 slope within the specified ditch. Construct the center of the rock ditch filter at least 6 inches lower than the ends, to act as a spillway for runoff and to prevent water from flowing around the filter. Space the filters so that the bottom elevation of the upper filter is the same as the top center elevation of the next filter. Rock ditch filter dimensions shall be as shown on the "Typical Rock Ditch Filter" exhibit or as directed by STATE. Locations of the filters shall be determined by STATE.
7. Fill Armor and Energy Dissipator Construction. Where rock is specified for fill armor, rock shall be machine placed and tamped at a 1½:1 slope, beginning at the toe of the fill. Where rock is used for an energy dissipator, rock shall be placed below the culvert outlet and embedded for a minimum of 3 feet, in accordance with Exhibit G.
8. Sod Removal. Remove/separate sod from crushed rock surfacing as directed by STATE. Sod material shall be scattered in stable locations through openings in the timber outside of the cleared right-of-way. In areas where sod cannot be scattered in a stable location, material shall be end hauled to designated waste areas as shown on Exhibit A, or other stable locations as directed by STATE.
9. Equipment. All excavation and riprap placement shall be performed using a minimum 1½ cubic yard, track-mounted excavator.

EXHIBIT D
FOREST ROAD SPECIFICATIONS

10. Waste areas shall be uniformly sloped and compacted for drainage. Designated Waste materials shall be seeded and mulched in accordance with specifications in Exhibit K.
11. Subgrade Preparation and Application of Surfacing Rock.
- (a) Complete culvert installations, drainage ditches, fill reconstruction, ditchouts, and other specified work prior to the application of new surfacing rock.
 - (b) Cut out all potholes and/or washboard sections from the existing surfacing.
 - (c) Apply required patching and leveling rock, as directed by STATE.
 - (d) Process (grade and mix) the existing surface and added base rock. Provide for a crown, outslope, or inslope of 4 to 6 percent, and compact in accordance to the “Compaction and Processing Requirements” in this Exhibit.
 - (e) Upon completion of above required work, apply, process, and compact surfacing rock in accordance to this Exhibit.
 - (f) Spot grading and grade, shape, and ditch: Includes items (a), (b), and (c) above. Provide for a crown, outslope, or inslope of 4 to 6 percent. Compaction is not required unless specified in specific instructions.

SPECIFIC SALE ACCESS ROAD IMPROVEMENT, SURFACE ROCK REPLACEMENT, AND ROAD MAINTENANCE INSTRUCTIONS

<u>Segment</u>	<u>Station</u>	<u>Work Description</u>
I1 to I2		
	0+00	Begin road segment, spot grading and process and compact lifts of new surfacing rock.
	108+90	Install a series of three rock ditch filters utilizing 6”-4” pit-run rock as shown in this Exhibit.
	118+50	Install disconnect culvert, utilize ¾”-0” crushed rock for bedding and backfill. Install energy dissipator at culvert outlet. Install culvert marker
	127+00	Install cross drain culvert, utilize ¾”-0” crushed rock for bedding and backfill. Install energy dissipator at culvert outlet. Install culvert marker. Begin three inch lift of ¾”-0” crushed rock.
	129+00	Install a series of three rock ditch filters utilizing 6”-4” pit-run rock as shown in this Exhibit.
	130+70	Install disconnect culvert, utilize ¾”-0” crushed rock for bedding and backfill. Install energy dissipator at culvert outlet. Install culvert marker
	161+30	End three inch lift of ¾”-0” crushed rock.
	170+00	Begin three inch lift of ¾”-0” crushed rock.
	192+50	End three inch lift of ¾”-0” crushed rock.
	217+20	Clear waste area (left).
	218+50	Begin two inch lift of ¾”-0” crushed rock.

EXHIBIT D
FOREST ROAD SPECIFICATIONS

11 to 12	231+75	End two inch lift of ¾"-0" crushed rock.
	236+70	Begin two inch lift of ¾"-0" crushed rock.
	242+55	End two inch lift of ¾"-0" crushed rock.
	245+55	Begin two inch lift of ¾"-0" crushed rock.
	253+40	End two inch lift of ¾"-0" crushed rock.
	287+75	Begin two inch lift of ¾"-0" crushed rock.
	292+00	End two inch lift of ¾"-0" crushed rock.
	293+30	End road segment. End spot grading.
13 to 14	0+00	Begin road segment, grade, shape, ditch only, no compaction required. Begin sod removal.
	11+15	Construct turnaround (right).
	20+60	End road segment. End sod removal.
15 to 16	0+00	Begin road segment, begin two inch lift of ¾"-0" crushed rock.
	3+75	Install culvert marker.
	13+20	Begin curve widening.
	13+90	Open turnaround (left).
	14+30	End curve widening, end two inch lift of ¾"-0" crushed rock.
	15+30	End road segment. Open landing.
17 to 18	0+00	Begin road segment, begin grade, shape, ditch and compact.
	7+50	Clean culvert inlet and outlet. Install culvert marker.
	10+70	Open turnaround.
19 to 110	0+00	Begin road segment, begin four inch lift of 4"-0" crushed rock.
	0+30	Clean culvert inlet and outlet. Install culvert marker.
	2+30	End road segment. End four inch lift of 4"-0" crushed rock. Construct landing and reestablish drainage.
111 to 112	0+00	Begin road segment, begin three inch lift of ¾"-0" crushed rock.
	8+80	Clean culvert inlet and outlet. Install culvert marker.
	13+00	Install culvert marker.
	16+75	Install culvert marker.

EXHIBIT D
FOREST ROAD SPECIFICATIONS

I11 to I12	17+60	Install culvert marker.
	21+95	Install culvert marker.
	29+00	Install culvert marker.
	32+15	Install culvert marker.
	35+80	End three inch lift of ¾"-0" crushed rock. Begin spot grading only.
	42+35	Install culvert marker.
	51+90	Install culvert marker.
	58+40	Clean culvert inlet and outlet. Install culvert marker.
	66+90	Clean culvert inlet and outlet. Install culvert marker.
	75+55	Install culvert marker.
	89+05	Install culvert marker.
	94+90	Install culvert marker.
	95+10	End road segment.
I13 to I14	0+00	Begin road segment, begin four inch lift of 4"-0" crushed rock. Begin sod removal.
	2+60	Install a series of three rock ditch filters utilizing 6"-4" pit-run rock as shown in this Exhibit.
	6+10	Construct turnaround (left).
	8+50	End road segment, end four inch lift of 4"-0" crushed rock. End sod removal. Clear landing.
I15 to I16	0+00	Begin road segment, begin four inch lift of 4"-0" crushed rock. Begin sod removal.
	2+90	End road segment, end four inch lift of 4"-0" crushed rock. End sod removal. Clear landing and reestablish drainage.
I17 to I18	0+00	Begin road segment, begin four inch lift of 4"-0" crushed rock and two inch lift of ¾"-0" crushed rock. Begin sod removal.
	3+70	End two inch lift of ¾"-0" crushed rock.
	5+50	End road segment, end four inch lift of 4"-0" crushed rock. End sod removal. Clear landing.
I19 to I20	0+00	Begin road segment, begin two inch lift of 1½"-0" crushed rock. Begin sod removal.
	8+05	Clean culvert inlet and outlet.
	10+50	Install culvert marker.
	13+85	Install a series of three rock ditch filters utilizing 6"-4" pit-run rock as shown in this Exhibit.

EXHIBIT D
FOREST ROAD SPECIFICATIONS

119 to 120	15+60	Install disconnect culvert, utilize ¾"-0" crushed rock for bedding and backfill. Install culvert marker
	19+20	Clean culvert inlet and outlet. Install culvert marker.
	21+00	End road segment, end two inch lift of 1½"-0" crushed rock. End sod removal.

EXHIBIT D

FULL BENCH AND END-HAUL REQUIREMENTS

POINT TO POINT	STA. TO STA.	CONTAINMENT - SIDECAST
3A to 3B	0+00 to 3+10	1
3C to 3D	0+00 to 1+60	1
3H to 3I	2+50 to 5+50	2

Full Bench and End-Haul Areas General Requirements

Sidecast includes any road generated excess excavation material which is not essential as part of the road prism, is not compacted, and is below the roadway. Material shall not be sidecast unless specified above.

Clearing and grubbing debris shall be end-hauled.

When controlled blasting is required, it shall be accomplished using timing devices, delayed charges, low intensity shots, or other suitable means to contain material within the road prism.

Containment/Sidecast

- (1) Full: No excavated material remains below the road.
- (2) Normal/Incidental: The amount of excavated material lost over the outside edge of the road shall not exceed 1 foot in depth.
- (3) Sidecast: Material shall be spread evenly below the road so that it does not build up behind trees, snags or other debris, and shall not exceed 3 feet in depth.

Any amount of material exceeding the containment requirements shall be removed by whatever means necessary and end-hauled to a designated waste area.

Waste Area Location

- As shown on Exhibit A and as marked in the field.
- Setback from slope break shall be a minimum of 20 feet horizontal measurement.


Waste Area Treatment

- Deposit at waste area, spread evenly, compact, and provide adequate drainage.
- Pile woody debris separate from other waste material.
- Mulch and seed all waste areas in accordance with Exhibit K.

EXHIBIT D

TYPICAL ROCK DITCH FILTER

SPACING BETWEEN ROCK FILTERS

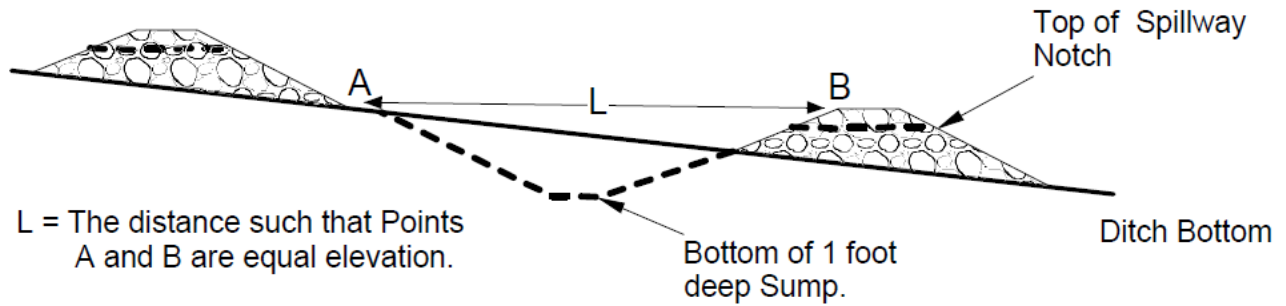

ROCK DITCH FILTER

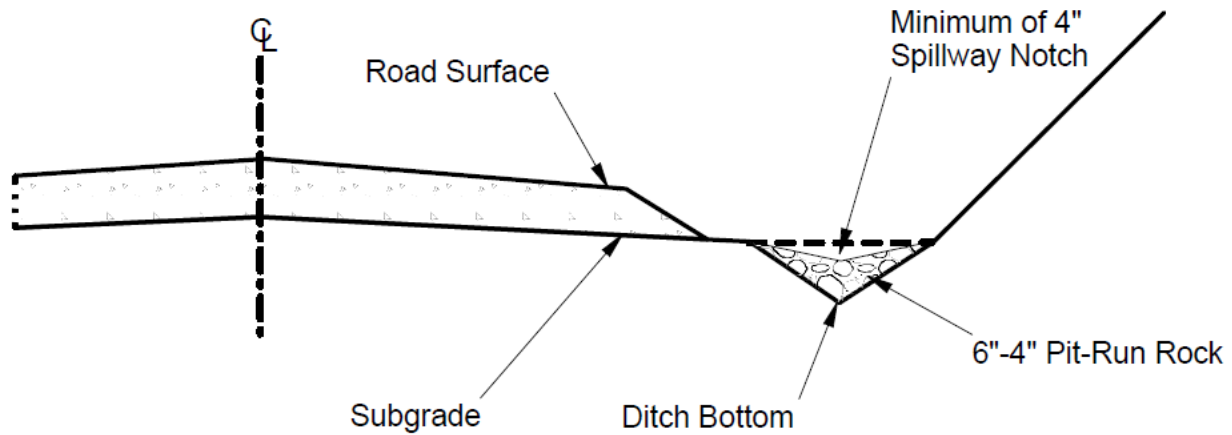


EXHIBIT D

ROAD SURFACING

ROAD SEGMENT: 2A to 2B				POINT TO POINT		Sta. to Sta.		TOTAL VOLUME (CY)
Application	Rock Size and Type	Location	Depth of Rock (inches)	2A to 2B		0+00 to 1+80		
				Volume (CY) Per		Number of		
Base Rock	4"-0" crushed	0+00 to 0+50	10	station	63	stations	0.50	32
Junction	1 1/2"-0" crushed	0+00	N/A	junction	22	junctions	1	22
Total Rock for Road Segment:				2A to 2B				54
ROAD SEGMENT: 2C to 2B				POINT TO POINT		Sta. to Sta.		TOTAL VOLUME (CY)
Application	Rock Size and Type	Location	Depth of Rock (inches)	2C to 2D		0+00 to 1+55		
				Volume (CY) Per		Number Of		
Base Rock	4"-0" crushed	0+00 to 1+55	10	station	63	stations	1.55	98
Junction	1 1/2"-0" crushed	0+00	N/A	junction	22	junctions	1	22
Culvert Bedding and Backfill	1 1/2"-0" crushed	0+00	N/A	culvert	44	culverts	1	44
Landings	6"-0" pit-run	1+55	N/A	landing	88	landings	1	88
Total Rock for Road Segment:				2C to 2D				208
ROAD SEGMENT: 3A to 3B				POINT TO POINT		Sta. to Sta.		TOTAL VOLUME (CY)
Application	Rock Size and Type	Location	Depth of Rock (inches)	3A to 3B		0+00 to 3+10		
				Volume (CY) Per		Number Of		
Base Rock	4"-0" crushed	0+00 to 3+10	10	station	63	stations	3.10	195
Junction	1 1/2"-0" crushed	0+00	N/A	junction	22	junctions	1	22
Traction Rock	1 1/2"-0" crushed	1+00 to 3+00	2	station	13	stations	2	26
Landings	6"-0" pit-run	3+10	N/A	landing	88	landings	1	88
Total Rock for Road Segment:				3A to 3B				331
ROAD SEGMENT: 3C to 3D				POINT TO POINT		Sta. to Sta.		TOTAL VOLUME (CY)
Application	Rock Size and Type	Location	Depth of Rock (inches)	3C to 3D		0+00 to 2+60		
				Volume (CY) Per		Number of		
Base Rock	4"-0" crushed	0+00 to 2+60	10	station	63	stations	2.60	164
Junction	1 1/2"-0" crushed	0+00	N/A	junction	22	junctions	1	22
Traction Rock	1 1/2"-0" crushed	1+00 to 2+00	2	station	13	stations	1	13
Landings	6"-0" pit-run	2+60	N/A	landing	88	landings	1	88
Total Rock for Road Segment:				3C to 3D				287
ROAD SEGMENT: 3E to 3F				POINT TO POINT		Sta. to Sta.		TOTAL VOLUME (CY)
Application	Rock Size And Type	Location	Depth of Rock (inches)	3E to 3F		0+00 to 1+30		
				Volume (CY) Per		Number Of		
Base Rock	4"-0" crushed	0+00 to 1+30	10	station	63	stations	1.30	82
Junction	1 1/2"-0" crushed	0+00	N/A	junction	22	junctions	1	22
Landings	6"-0" pit-run	1+30	N/A	landing	88	landings	1	88
Total Rock for Road Segment:				3E to 3F				192
ROAD SEGMENT: 3G				POINT TO POINT		Sta. to Sta.		TOTAL VOLUME (CY)
Application	Rock Size and Type	Location	Depth of Rock (inches)	3G		N/A		
				Volume (CY) Per		Number of		
Junction	4"-0" crushed	0+00	N/A	junction	22	junctions	1	22
Landings	6"-0" pit-run	1+55	N/A	landing	88	landings	1	88
Total Rock for Road Segment:				3G				110

EXHIBIT D

ROAD SURFACING

ROAD SEGMENT: 3H to 3I				POINT TO POINT		Sta. to Sta.		TOTAL VOLUME (CY)
Application	Rock Size And Type	Location	Depth of Rock (inches)	3H to 3I		0+00 to 9+50		
				Volume (CY) Per		Number Of		
Base Rock	4"-0" crushed	0+00 to 9+50	10	station	63	stations	9.50	599
Junction	1 1/2"-0" crushed	0+00	N/A	junction	22	junctions	1	22
Traction Rock	1 1/2"-0" crushed	3+00 to 7+00	2	station	13	stations	4	52
Turnout	4"-0" crushed	3+00	N/A	turnout	22	turnouts	1	22
Turnout	1 1/2"-0" crushed	3+00	N/A	turnout	11	turnouts	1	11
Rock Ditch Filters	6"-4" pit-run	6+05	N/A	load	11	loads	1	11
Fill Armor	24"-12" riprap	7+00	N/A	load	11	loads	12	132
Turnaround	4"-0" crushed	8+00	N/A	turnout	33	turnouts	1	33
Total Rock for Road Segment:				3H to 3I				882
ROAD SEGMENT: I1 to I2				POINT TO POINT		Sta. to Sta.		TOTAL VOLUME (CY)
Application	Rock Size and Type	Location	Depth of Rock (inches)	I1 to I2		0+00 to 293+30		
				Volume (CY) Per		Number of		
Surface Leveling Rock	3/4"-0" crushed	115+60, 119+75, 123+90, 127+00	N/A	load	11	loads	4	44
Surfacing	3/4"-0" crushed	127+00 to 161+30, 170+00 to 192+50	3	station	19	stations	56.8	1,079
Turnouts	3/4"-0" crushed	133+20, 159+65, 170+65	N/A	turnout	11	turnouts	3	33
Turnouts	3/4"-0" crushed	181+10, 192+15, 152+15	N/A	turnout	22	turnouts	3	66
Turnaround	3/4"-0" crushed	147+00, 161+30	N/A	turnaround	22	turnaround	2	44
Junctions	3/4"-0" crushed	170+00	N/A	junction	22	junctions	1	22
Surfacing	3/4"-0" crushed	228+65 to 231+75, 236+70 to 242+55, 245+45 to 253+40, 287+75 to 292+00	2	station	13	stations	21.2	275
Culvert Bedding and Backfill	3/4"-0" crushed	118+50, 127+00, 130+70	N/A	culvert	33	culverts	3	99
Culvert Energy Dissipator	24"-6" riprap	118+50, 127+00, 130+70	N/A	dissipator	11	dissipators	3	33
Rock Ditch Filters	6"-4" pit run	108+90, 129+00	N/A	3 filter series	11	3 filter series	2	22
Total Rock for Road Segment:				I1 to I2				1,717

EXHIBIT D

ROAD SURFACING

ROAD SEGMENT: I3 to I4				POINT TO POINT		Sta. to Sta.		TOTAL VOLUME (CY)
Application	Rock Size And Type	Location	Depth of Rock (inches)	I3 to I4		0+00 to 20+60		
				Volume (CY) Per		Number Of		
Surface Leveling Rock	4"-0" crushed	0+00 to 20+60	N/A	load	11	loads	5	55
Turnaround	4"-0" crushed	11+15	N/A	turnaround	44	turnaround	1	44
Turnaround	4"-0" crushed	17+40	N/A	turnaround	22	turnaround	1	22
Total Rock for Road Segment:				I3 to I4				121
ROAD SEGMENT: I5 to I6				POINT TO POINT		Sta. to Sta.		TOTAL VOLUME (CY)
Application	Rock Size And Type	Location	Depth of Rock (inches)	I5 to I6		0+00 to 15+30		
				Volume (CY) Per		Number Of		
Surfacing	3/4"-0" crushed	0+00 to 14+30	2	station	13	stations	14.3	186
Curve Widening Surface	3/4"-0" crushed	13+20 to 14+30	N/A	load	11	loads	2	22
Turnaround	4"-0" crushed	13+90	N/A	turnaround	22	turnaround	1	22
Turnouts	3/4"-0" crushed	8+50	N/A	turnout	11	turnouts	1	11
Total Rock for Road Segment:				I5 to I6				241
ROAD SEGMENT: I7 to I8				POINT TO POINT		Sta. to Sta.		TOTAL VOLUME (CY)
Application	Rock Size And Type	Location	Depth of Rock (inches)	I7 to I8		0+00 to 10+70		
				Volume (CY) Per		Number Of		
Turnaround	4"-0" crushed	10+70	N/A	turnaround	11	turnaround	1	11
Total Rock for Road Segment:				I7 to I8				11
ROAD SEGMENT: I9 to I10				POINT TO POINT		Sta. to Sta.		TOTAL VOLUME (CY)
Application	Rock Size And Type	Location	Depth of Rock (inches)	I9 to I10		0+00 to 2+30		
				Volume (CY) Per		Number Of		
Surfacing	4"-0" crushed	0+00 to 2+30	4	station	25	stations	2.3	58
Landings	6"-0" pit run	2+30	N/A	landing	88	landings	1	88
Total Rock for Road Segment:				I9 to I10				146
ROAD SEGMENT: I11 to I12				POINT TO POINT		Sta. to Sta.		TOTAL VOLUME (CY)
Application	Rock Size And Type	Location	Depth of Rock (inches)	I11 to I12		0+00 to 95+10		
				Volume (CY) Per		Number Of		
Surfacing	3/4"-0" crushed	0+00 to 35+80	3	station	19	stations	35.8	680
Surface Leveling Rock	3/4"-0" crushed	14+90, 55+20, 59+50, 64+60	N/A	load	11	loads	6	66
Turnouts	3/4"-0" crushed	2+40, 10+70, 14+90, 31+75	N/A	turnout	11	turnouts	4	44
Turnouts	3/4"-0" crushed	29+45	N/A	turnout	22	turnouts	1	22
Junctions	3/4"-0" crushed	0+00	N/A	junction	22	junctions	1	22
Total Rock for Road Segment:				I11 to I12				834

EXHIBIT D

ROAD SURFACING

ROAD SEGMENT: I13 to I14				POINT TO POINT		Sta. to Sta.		TOTAL VOLUME (CY)
Application	Rock Size And Type	Location	Depth of Rock (inches)	I13 to I14		0+00 to 8+50		
				Volume (CY) Per		Number Of		
Surfacing	4"-0" crushed	0+00 to 8+50	4	station	25	stations	8.5	213
Turnouts	4"-0" crushed	3+45	N/A	turnout	11	turnouts	1	11
Turnaround	4"-0" crushed	6+10	N/A	turnaround	22	turnaround	1	22
Junctions	4"-0" crushed	1+40	N/A	junction	11	junctions	1	11
Rock Ditch Filters	6"-4" pit run	2+60	N/A	3 filter series	11	3 filter series	1	11
Landings	6"-0" pit run	8+50	N/A	Landing	66	Landings	1	66
Total Rock for Road Segment:				I13 to I14				334
ROAD SEGMENT: I15 to I16				POINT TO POINT		Sta. to Sta.		TOTAL VOLUME (CY)
Application	Rock Size And Type	Location	Depth of Rock (inches)	I15 to I16		0+00 to 2+90		
				Volume (CY) Per		Number Of		
Surfacing	4"-0" crushed	0+00 to 2+90	4	station	25	stations	2.9	73
Landings	6"-0" pit run	2+90	N/A	landing	88	landings	1	88
Total Rock for Road Segment:				I15 to I16				161
ROAD SEGMENT: I17 to I18				POINT TO POINT		Sta. to Sta.		TOTAL VOLUME (CY)
Application	Rock Size And Type	Location	Depth of Rock (inches)	I17 to I18		0+00 to 5+50		
				Volume (CY) Per		Number Of		
Surfacing	4"-0" crushed	0+00 to 5+50	4	station	25	stations	5.5	138
Traction Rock	3/4"-0" crushed	0+00 to 3+70	2	station	13	stations	3.7	48
Landings	6"-0" pit run	5+50	N/A	landing	88	landings	1	88
Total Rock for Road Segment:				I17 to I18				274
ROAD SEGMENT: I19 to I20				POINT TO POINT		Sta. to Sta.		TOTAL VOLUME (CY)
Application	Rock Size And Type	Location	Depth of Rock (inches)	I19 to I20		0+00 to 21+00		
				Volume (CY) Per		Number Of		
Surfacing	1 1/2"-0" crushed	0+00 to 21+00	2	station	13	stations	21	273
Culvert Bedding and Backfill	3/4"-0" crushed	15+60	N/A	culvert	33	culverts	1	33
Rock Ditch Filters	6"-4" pit run	13+85	N/A	3 filter series	11	3 filter series	1	11
Total Rock for Road Segment:				I19 to I20				317
ROCK TOTALS (CY)		4"-0"	1 1/2"-0"	3/4"-0"	24"-12"	24"-6"	6"-4"	6"-0"
6,195		1,924	507	2,796	132	33	33	770

Roads shall be uniformly graded, shaped and approved by STATE prior to rocking.

EXHIBIT D

ROCK ACCOUNTABILITY

PURCHASER shall obtain subgrade approval from STATE prior to rocking. Rocking shall be limited to periods when weather conditions are acceptable to STATE and when sediment will not enter streams. Additional surfacing needed because of construction season or construction practice is not included in the preceding ROAD SURFACING table, and shall be furnished at PURCHASER expense.

Rock accountability shall be determined by the following methods, as directed by STATE. STATE shall be given 24 hours' notice prior to rocking.

Rock Checking. All rock spreading shall be done only when a STATE representative is present. STATE shall issue a receipt for each load delivered, and rock shall be measured without allowance for shrinkage or shakedown during hauling. Total truck measure volume for each road segment shall be as shown on Exhibit D. Deliver at least 500 cubic yards per 8-hour shift, unless otherwise approved by STATE. A penalty of \$10 for each 10 cubic yards which are not delivered during a single shift shall be billed, and payment shall be required prior to final acceptance of the project by STATE.

Depth Measurement. Rock shall be spread and compacted according to the depths specified in Exhibit D. Truck measure volumes are given, but shall not limit the amount of rock spread.

Depth shall be determined in the most compacted area of the surface cross section. The depth of compacted aggregates shall not vary more than 1 inch from the depth specified in the "Road Surfacing" table in Exhibit D. The average depth for each road segment shall be the specified depth or greater. If additional rock is required because of insufficient depth, the locations and volumes to be added shall be determined by STATE.

Load Records. Notify STATE before spreading the rock and maintain a record of all rock delivered for spreading. Make the record available for STATE inspection. A report listing the amount of rock delivered the prior month must be submitted no later than the 15th of each month.

EXHIBIT D

COMPACTION AND PROCESSING REQUIREMENTS

Moisture Content: Compaction must take place when moisture content of the materials being compacted is favorable for effective compaction as determined by STATE.

Compaction Pass: A pass is defined as traveling a road section forward and then backward over that same section.

Subgrade. Subgrade surfaces of the road segments listed below shall be graded and compacted. Compaction shall be accomplished by traveling all surfaces from shoulder to shoulder until the surface is smooth and hard and visible deformation ceases. At least 3 passes shall be made over the entire width and length of the road. Compaction shall be accomplished by using one or more of the approved equipment options listed below:

Subgrade shall be crowned, outsloped, or insloped at 4 to 6 percent as specified in the "Forest Roads Specifications" table in Exhibit D.

ROAD SEGMENT	SUBGRADE COMPACTION OPTIONS
All road segments requiring compaction.	1

Fills. Embankments and fills shall be placed in (approximately) horizontal layers not more than 8 inches in depth. Each layer shall be separately, and thoroughly, compacted. Compaction equipment shall be operated over the entire width of each layer until visible deformation of the layers ceases. At least 3 passes shall be made over the entire width and length of each layer.

Placing individual rocks or boulders with more depth than the allowed layer thickness shall be permitted, provided the embankment will accommodate them. Such rocks and boulders shall be at least 6 inches below the subgrade. They shall be carefully distributed and the voids filled with finer material, forming a dense and compacted mass. Compaction shall be accomplished by using one or more of the approved equipment options listed below:

ROAD SEGMENT	SUBGRADE COMPACTION OPTIONS
All road segments.	1, 2 and 3

Crushed Rock. The rock shall be uniformly mixed and spread in layers on the approved roadbed. Each layer of crushed rock shall be moistened or dried to uniform moisture content suitable for maximum compaction and compacted in layers not to exceed 6 inches in depth. When more than 1 layer is required, each shall be shaped, compacted, and approved by STATE before the succeeding layer is placed. Any irregularities or depressions that develop during compaction of the top layer shall be corrected by loosening the material at these places and adding or removing material until the surface is smooth and uniform. Each layer shall be compacted with a minimum of 3 passes over the entire width and length of the road until the surface is smooth and hard and visible deformation ceases. Compaction shall be accomplished by using one or more of the approved equipment options listed below:

Rock shall be compacted and processed during the same project period it is spread, unless otherwise approved in writing by STATE.

Rock shall be crowned, outsloped, or insloped at 4 to 6 percent as specified in the "Forest Roads Specifications" table in Exhibit D.

EXHIBIT D

COMPACTION AND PROCESSING REQUIREMENTS

ROAD SEGMENT	CRUSHED COMPACTION OPTIONS
All road segments requiring crushed rock.	1

Pit-Run Rock. The rock shall be uniformly mixed and spread in layers on the approved roadbed. Each layer of pit-run rock shall be moistened or dried to uniform moisture content suitable for maximum compaction and compacted in layers not to exceed 8 inches in depth. When more than 1 layer is required, each shall be shaped and compacted before the succeeding layer is placed. Any irregularities or depressions that develop during compaction of the top layer shall be corrected by loosening the material at these places and adding or removing material until the surface is smooth and uniform. Each layer shall be compacted with a minimum of 3 passes over the entire width and length of the road. Compaction shall be accomplished by using one or more of the approved equipment options listed below:

Rock shall be crowned, outsloped, or insloped at 4 to 6 percent as specified in the “Forest Roads Specifications” table in Exhibit D.

ROAD SEGMENT	PIT-RUN COMPACTION OPTIONS
Segments requiring pit-run rock.	4

EXHIBIT D

COMPACTION EQUIPMENT OPTIONS

- (1) Vibratory Rollers. The drum shall have a smooth surface, a diameter not less than 48 inches, a width not less than 58 inches, and a turning radius of 15 feet or less. Vibration frequency shall be regulated in steps to 1400, 1500, and 1600 VPM, corresponding to engine speeds of 1575, 1690, and 1800 RPM. The centrifugal force developed shall be 7 tons at 1600 VPM. It shall be activated by a power unit of not less than 25 horsepower. The vibratory roller shall be self-propelled and operated at speeds ranging from 0.9 miles to 1.8 miles per hour, as directed by STATE.
- (2) Rubber-Tired Skidders. A rubber-tired skidder weighing a minimum of 20,000 pounds shall be operated over the fill layers so that the entire layered surface comes in contact with the tires. Skidders with oversized tires (high flotation) are not acceptable for compaction.
- (3) Vibratory Hand-Operated or Backhoe-Mounted Tamper. Vibratory hand-held or hydraulic tampers shall be used for compaction of backfill materials around culverts (and/or bridge approach embankment materials around abutments). The tamper shoe dimensions shall be a minimum of 10" X 13" and capable of a centrifugal force of 2,250 pounds.
- (4) Dozer. A dozer/track-type tractor weighing a minimum of 45,000 pounds as directed by STATE shall be operated over the pit-run rock so that the entire surface comes in contact with the tracks.

EXHIBIT E

CULVERT SPECIFICATIONS

All culvert materials shall be furnished and installed by PURCHASER, unless otherwise specified in the Contract.

Culverts 36 inches in diameter and smaller shall be constructed of corrugated polyethylene, unless otherwise specified in the Contract. Culverts larger than 36 inches in diameter shall be constructed of corrugated aluminized Type 2 steel, unless otherwise specified in the Contract. Polyethylene culverts shall be double-walled and meet the requirements of AASHTO M-294-11, Type S, or ASTM F2648. Aluminized (Type 2) steel culverts shall meet the requirements of AASHTO M-36-03¹."

Polyethylene joints shall be made with split couplings, corrugated to engage the culvert corrugations, and shall engage a minimum of 4 corrugations, 2 on each side of the culvert joint.

Culverts shall be located according to the alignment and grade as shown on the Plan and Profile, and/or as staked in the field, or as specified in special instructions.

The STATE Representative shall determine final culvert locations and stake the locations in the field prior to installation.

Culverts in live streams shall be installed with the inlet and outlet on grade with the stream bottom, unless otherwise specified in writing.

Cross Drain Culverts

Cross drain culverts on road grades in excess of 3 percent shall be skewed at least 30 degrees from perpendicular to the road centerline, except that cross drain culverts at the low point of dips in roads shall not be skewed. Cross drains shall be skewed to fit the required culvert length to the road prism.

Cross drain culverts shall be installed at a slope steeper than the incoming ditch grade, but not less than 3 percent or greater than 10 percent.

Disconnect Culverts

The culvert inlet shall be located as close to the channel that it is disconnecting, while the culvert outlet shall be located as far from the channel as possible; discharge culvert outflow on the forest floor, allowing for filtration before the water enters the disconnected channel.

The foundation and trench walls for all culverts shall be free from logs, stumps, limbs, stones, and other objects which would dent or damage the culvert. The culvert trench shall be excavated 3 culvert diameters wide to permit compaction and working on each side of the culvert. Tamping shall be done in 6-inch lifts, 1 culvert diameter each side of the culvert. Bedrock shall be excavated as required to provide a uniform foundation for the full length of the culvert.

A bedding of crushed rock as specified shall be placed to provide a wide band of support and to transmit the load from above evenly over the entire length of the culvert for all culverts on road improvement segments.

Backfill shall consist of crushed rock on improvement segments and job-excavated soil free of stumps, limbs, rocks, or other objects which would damage the culvert on new construction segments.

Transporting of the culvert shall be done carefully. Dragging or allowing free fall from trucks or into trenches shall not be permitted.

Minimum height of cover over top of culvert to subgrade when road is to be rockered shall be as follows: 12" for culverts 18" to 36" and 18" for culverts 42" to 96" and add 6" for roads which will not be rockered. Minimum vertical cover for other designs shall be as specified by STATE.

EXHIBIT E

CULVERT SPECIFICATIONS

Lengths of individual culvert sections shall be not less than 10 feet, unless otherwise provided for in special instructions. The shortest culvert section length shall be placed at the inlet end.

The ends of each culvert shall be free of logs and debris which would restrict the free flow of water.

The intake end of cross drain and disconnect culverts shall be provided with a sediment catching basin 3 feet in diameter at the bottom. The outlet end of any culvert which would allow water to erode embankment soil shall be provided with an energy dissipator, half round, or other approved slope protection device. Construct lead-off ditches away from culvert outlets where the slope gradients restrict the free flow of water.

Culverts 24 inches in diameter or larger shall have 1:1 step beveled inlets.

Compaction by tamping utilizing a Vibratory Hand-Operated or Backhoe-Mounted Tamper is required for all culverts.

All culverts scheduled for replacement shall become property of the PURCHASER and) be removed from STATE land and hauled to an approved refuse site in the same project period in which replacement occurred. Damaged culvert inlets and/or outlets shall be repaired by opening them with a hydraulic jack, or cutting off the culvert end to allow for free passage of water at peak flow levels.

The intake ends of culverts in fills less than 3 feet to the top of the culvert shall be marked by driving white fiberglass posts within 6 inches of the downgrade side. Posts shall be a minimum of 6 feet long and 2½ inches wide, with the spade driven 2 feet into the ground. Install a culvert marker at each existing culvert that is missing a marker that could be reached by a grader blade.

Energy Dissipators shall be installed within 72 hours of culvert installation, unless otherwise approved in writing by STATE. Steel posts used with half round installation shall be painted with rust preventative paint.

A manufacturer's certification that the product was manufactured, tested, and supplied in accordance with this specification shall be furnished to STATE upon request.

Following are the minimum standard gauges for steel culvert and coupling bands. Some culverts may require different gauges and may be found in the culvert listing.

<u>Dia.</u>	<u>Steel Culvert</u>	<u>Thickness</u>		<u>Band Gauges</u>	<u>Band Widths (")</u>	
	<u>Gauge</u>	<u>Uncoated</u>	<u>Coated</u>		<u>Annular</u>	<u>Helical</u>
18-36	16	(0.0598")	(0.064")	16	12	12
42-54	14	(0.0747")	(0.079")	16	12	12
60-84	12	(0.1046")	(0.109")	16	24	24
90-120	12	(0.1046")	(0.109")	16	26	26

Culverts larger than 60" in diameter shall have (3" x 1") corrugations.

EXHIBIT E
CULVERT LIST

CULVERT NO.	DIAMETER (Inches)	LENGTH (Feet)	MATERIAL TYPE	GAUGE	ROAD SEGMENT POINT TO POINT	STATION
1	18	50	CCP	N/A	2C to 2D	0+00
2	18	30	CCP	N/A	3H to 3I	0+40
3*	18	30	CCP	N/A	3H to 3I	5+25
4	18	50	CCP	N/A	3H to 3I	6+50
5*	18	30	CCP	N/A	I1 to I2	118+50
6	18	30	CCP	N/A	I1 to I2	127+00
7*	18	30	CCP	N/A	I1 to I2	130+70
8*	18	30	CCP	N/A	I19 to I20	15+60

TOTAL LENGTHS BY DIAMETER
18 INCH
280

CPP = Polyethylene

* = Ditch Disconnect Culvert

EXHIBIT F

PIT-RUN AND RIPRAP ROCK SPECIFICATIONS

For Pit-Run	Passing	10" sieve	100%
	Passing	6" sieve	60-85%
	Passing	3" sieve	30-50%
	Passing	¼" sieve	0-10%

For 6"-4" Pit-run A minimum of 50 percent of the material shall measure a minimum of 6 inches, measured in one dimension. Material shall be clean, well graded, and free of 3"-0" fines.


For 24"-6" Riprap A minimum of 50 percent of the material shall measure a minimum of 24 inches, measured in one dimension. Material shall be clean, well graded, and free of 5"-0" fines.

For 24"-12" Riprap A minimum of 50 percent of the material shall measure a minimum of 24 inches, measured in one dimension. Material shall be clean, well graded, and free of 11"-0" fines.

Control of gradation shall be by visual inspection by STATE.

EXHIBIT G

TYPICAL EMBEDDED ENERGY DISSIPATOR

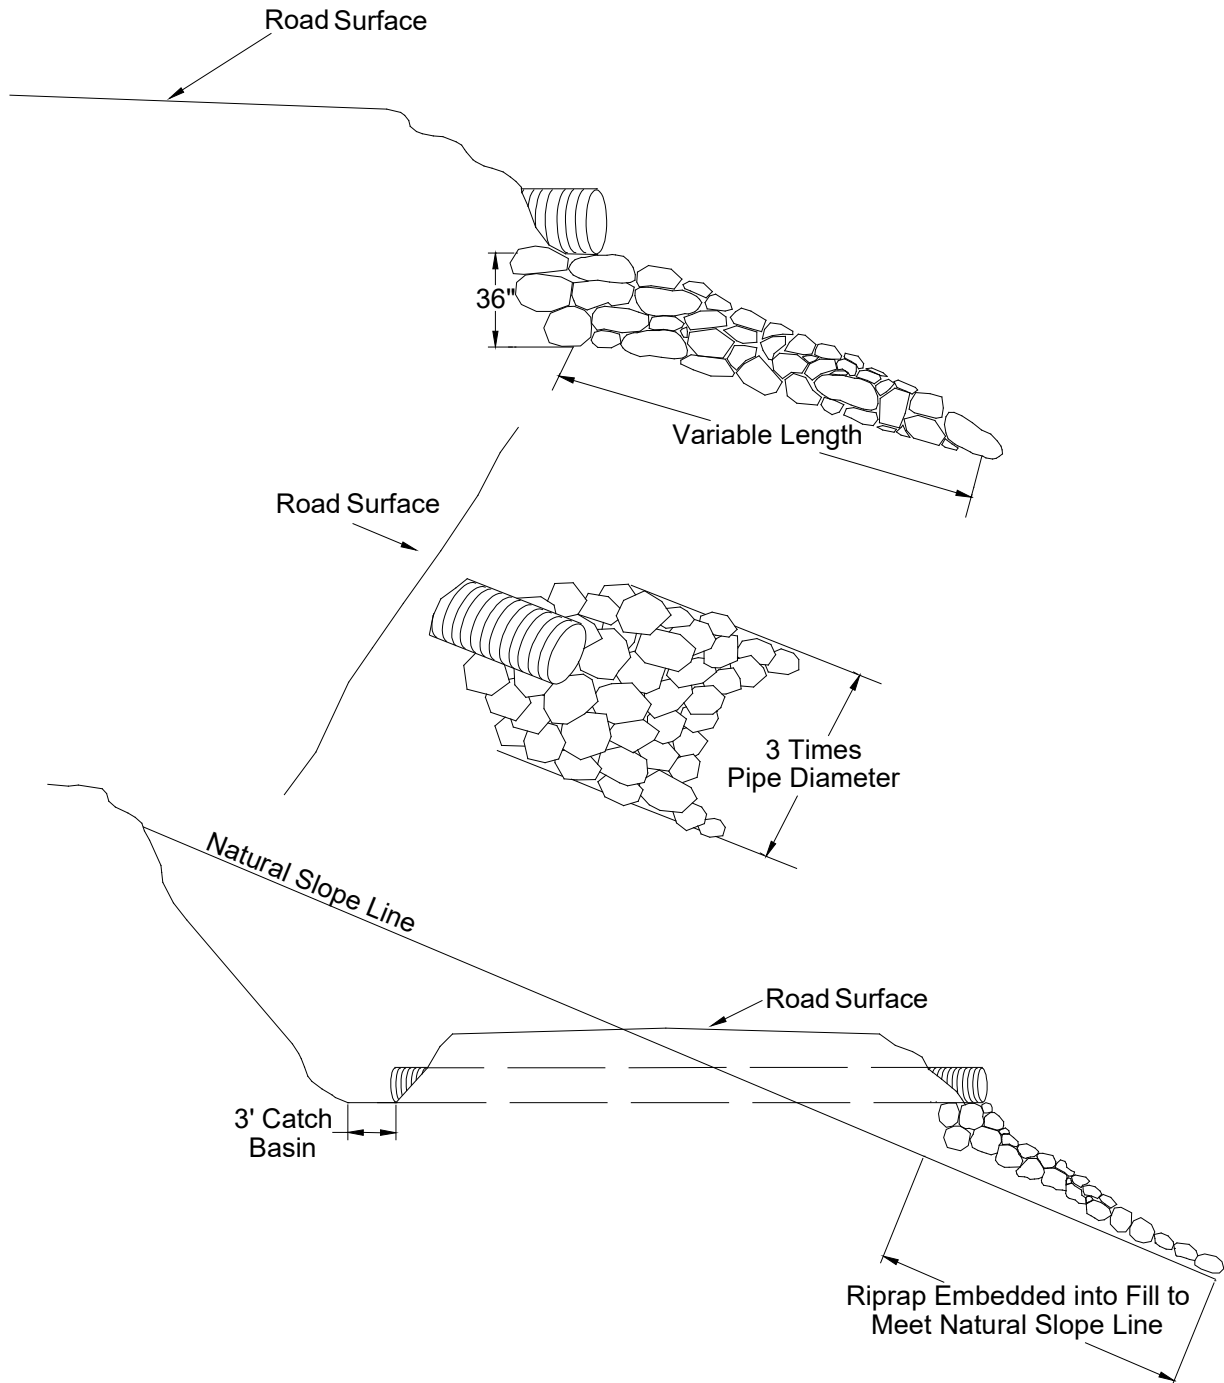


Dissipator shall be installed prior to the installation of the culvert, unless approved by STATE.

EXHIBIT H

WATERBAR SPECIFICATIONS

PROFILE


DITCHED AND OUTSLOPED




SPACING OF WATERBARS	
ROAD GRADE	DISTANCE
< 6 %	400'
6 - 10 %	200'
11 - 15 %	150'
> 15 %	100'

CROSS SECTION

DITCHED




OUTSLOPED



CONSTRUCT DITCHOUT THRU ANY EXISTING BERM.
CROSS DRAINAGE GRADIENT MINIMUM 3%.

PLAN VIEW

DITCHED

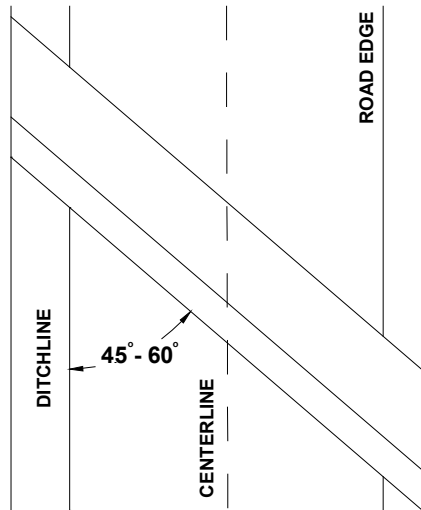

OUTSLOPED

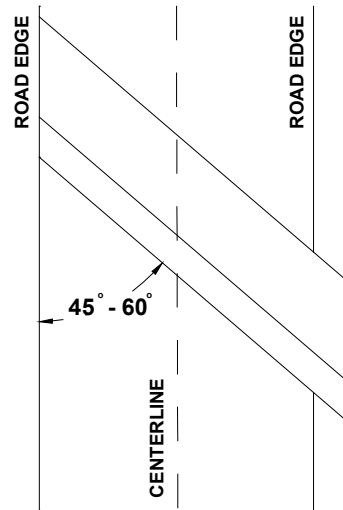


EXHIBIT K

SEEDING AND MULCHING

This work shall consist of preparing seedbeds and furnishing and placing required seed and straw mulch. Straw mulch shall consist of straw that is free of noxious weeds. Apply seed and straw mulch to all waste areas resulting from Project No. 1 and 2.

Seeding Seasons. Seeding shall be performed only from March 1 through June 15 and August 15 through October 31. Seeding materials shall not be applied during windy weather or when the ground is excessively wet or frozen. Areas of disturbed soil shall be seeded by the end of the project period in which work was started. PURCHASER shall notify STATE within 24 hours of seeding application.

APPLICATION METHODS FOR SEED

Dry Method. Mechanical seeders, seed drills, landscape seeders, cultipacker seeders, or other approved mechanical seeding equipment shall be used to apply the seed in the amounts and mixtures specified. Hand-operated seeding devices may be used when seed is applied in dry form.

APPLICATION RATES FOR SEED

The seed mixture listed below shall be applied at 100 lbs. per acre. The seed mixture shall be comprised of the following:

SPECIES	MIXTURE	PURE LIVE SEED	GERMINATION
Annual Rye	33%	95%	>90%
Orchard Grass	33%	95%	>90%
Perennial Rye	34%	95%	>90%

Mulching Period. Straw mulch shall be applied within 24 hours of spreading grass seed.

APPLICATION RATES FOR MULCH

Place straw mulch to a reasonably uniform thickness of 1½ to 2½ inches. This rate requires between 2 and 3 tons of dry mulch per acre.

Application Locations:

Road Segment	Location
V1 to V2	3+20
V1 to V2	4+40
I1 to I2 (Waste Area)	217+20

PART IV: OTHER INFORMATION
FOREST PRACTICES ACT “WRITTEN Plan”
Constructing a permanent Stream Crossing in a Type N Stream

Timber Sale Area is located in Section 6 of T8N, R6W, W.M., Clatsop County, Oregon.

Landowner: Oregon Department of Forestry
92219 Hwy 202
Astoria, OR 97103
(503) 325-5451

Protected Resources: Unnamed Type N tributary of Spear Creek

Road Segments:

3H to 3I (Sta. 6+50) crosses an unnamed Type N tributary of Spear Creek, located in the S1/2 of Section 6 T8N, R6W, W.M., Clatsop County, Oregon. A written plan is required when constructing a permanent stream crossing fill in a Type N stream, as specified in ORS 629-625-0100(2)(b)(d).

Situation:

Need to install stream crossing structure for access with a new construction road. Other alternative routes have been assessed and deemed unfeasible.

Solution:

Design a crossing structure that meets or exceeds the need of the particular stream crossing site and FPA requirements for a Type N stream crossing.

Drainage Area and Structure Design:

1. Segment 3H to 3I (Sta. 6+50), a stream crossing structure will have an 18" diameter, 50' long, corrugated polyethylene culvert and a 10.5 foot tall permanent fill be installed.

Road segment:	3H to 3I
Station	6+50
New Stream Gradient:	15%
Size of Watershed:	8.1 acres
Average Stream Width:	2.0 feet
Streambed material:	Gravel
50 Year Peak Flow/Mi. ² :	150 cfs
100 Year Peak Flow:	2.26 cfs
Flow Capacity of New Structure:	5 cfs

Resource Protection Measures:

- In water work will be conducted between April 1 and October 31 during dry weather and low flow periods.
- Machine activity in stream channel shall be minimized.
- All fill excavation, backfilling, stream channel development, and riprap placement shall be performed using a minimum 2 cubic yard track mounted excavator.
- A dewatering plan shall be developed and followed from the start of excavation until the structure is in place and water flowing.
- An erosion control plan shall be developed and followed to prevent sediment from entering the stream during construction work.
- Clearing debris, and excavation material shall be hauled to a designated waste area.
- Riprap rock shall be used to protect the structure, road approaches/embankments, and stream banks from erosion.
- Oil spill response materials shall be on site before work begins.

I, the undersigned, submit this written plan in compliance with the requirements in the Forest Practices Act regarding the operations conducted when, constructing a permanent stream crossing fill in a Type N stream. I agree to the protection measures listed on this plan.

Submitted _____
Purchaser/Operator Date

Attachments: Exhibit A

Original: Salem

Copies: Operator, Purchaser, District File, Forest Roads Unit, Marketing Unit

**PART IV: OTHER INFORMATION - FOREST PRACTICES ACT “WRITTEN Plan”
For Operations within 100 feet of Type F Stream**

Timber Sale Area is located in Portions of Sections 6, 7, and 18 of T8N, R6W, W.M., and Portions of Section 12 of T8N, R7W, W.M., Clatsop County, Oregon.

Landowner: Oregon Department of Forestry
92219 HWY 202
Astoria, OR 97103
(503) 325-5451

Protected Resources:

Sludge Creek
Davis Creek
Unnamed Tributary of Davis Creek

Specific Site Characteristics:

Sludge Creek (Small, Type F) drains southwest along the southern boundary of Unit 1 for approximately 2,000 feet.

Davis Creek (Small, Type F) drains northwest along the southern boundary of Unit 2 for approximately 1,250 feet. An unnamed tributary of Davis Creek (Small, Type F) drains southwest along the western boundary of Unit 2 for approximately 450 feet.

Tree and Vegetation Retention:

Vegetation within the buffers consists of red alder, Douglas-fir, and western hemlock. The understory consists of vine maple, salmonberry, devil’s club, sword fern, graminoids, and forbs.

Type F streams within the Timber Sale Area are buffered at a minimum of 120 feet horizontal distance.

Resource Protection Practices:

Along all the above-mentioned streams, as well as any other streams, the following practices are required under the timber sale contract, to protect the streams and streamside areas:

- Trees that fall or slide into Type F RMAs shall not be removed without prior approval from STATE.
- Trees adjacent to the stream buffers (RMAs) will be felled away from or parallel to the streams to prevent trees from entering the aquatic areas.
- When cable logging is conducted nearby the RMAs, logging lines may cross, but shall not be lowered into the RMAs during yarding, except during rigging. During rigging, the lines must be pulled out of the RMAs when changing corridors.
- Logs shall be fully suspended when yarding across all stream buffers (RMAs).
- Cable corridors must be at least 100 feet apart where they cross the RMAs.

I, the undersigned, submit this written plan in compliance with the requirements in the Forest Practices Act regarding the operations conducted within 100 feet of Type F and D streams. I agree to the protection measures listed on this plan:

Submitted: _____
Purchaser/Operator Contract Representative

Date: _____

Original: Salem
CC: Operator, Purchaser, District file, Marketing Unit



OREGON DEPARTMENT of FISH and WILDLIFE
FISH SCREENING PROGRAM
SMALL PUMP SCREEN SELF
CERTIFICATION

The Oregon Water Resources Department in coordination and cooperation with the Oregon Department of Fish and Wildlife includes screen requirements on pumps to protect fish as a condition of many surface water and/or reservoir water right permits. This is done in accordance with ORS 537.153.

The Oregon Department of Fish and Wildlife does not usually inspect small pump screens at **pumped diversions less than 225 gpm** (gallons per minute), but furnishes the following fish screening criteria information to the water right permit holder:

Screen material open area must be at least 27% of the total wetted screen area.

Perforated plate: Openings shall not exceed 3/32 or 0.0938 inches (2.38 mm).

Mesh/Woven wire screen: Square openings shall not exceed 3/32 or 0.0938 inches (2.38 mm) in the narrow direction, e.g., 3/32 inch x 3/32 inch open mesh.

Profile bar screen/Wedge wire: Openings shall not exceed 0.0689 inches (1.75 mm) in the narrow direction.

Screen area must be large enough not to cause fish impact. Wetted screen area depends on the water flow rate and the water approach velocity. **Approach velocity** is the water velocity perpendicular to and approximately three inches in front of any part of the screen face.

An Active pump screen is a self-cleaning screen that has a proven cleaning system. The **screen approach velocity for active pump screens** shall not exceed 0.4 fps (feet per second) or 0.12 mps (meters per second). The wetted screen area in square feet is calculated by dividing the maximum water flow rate in cubic feet per second (1 cfs = 449 gpm) by 0.4 fps.

A Passive pump screen is a screen that has no cleaning system other than periodic manual cleaning. **Screen approach velocity for passive pump screens** shall not exceed 0.2 fps or 0.06 mps. The wetted screen area in square feet is calculated by dividing the maximum water flow rate by 0.2 fps.

For further information on fish screening please contact:

Oregon Department of Fish and Wildlife, Statewide Fish Screening Coordinator: 503.947.6229
Oregon Department of Fish and Wildlife, Screening Program Administrative Specialist:
503.947.6224

As evidence of having met fish screen installation requirements, please sign the certification and send to: **Oregon Water Resources Department, Water Rights Section, 725 Summer Street NE, Suite A, Salem, OR 97301-1271.**

Certification: I certify that my small pumped diversion of less than 225 gpm meets fish screening criteria, and that I will maintain it to comply with regulatory criteria. I also understand that should fish screening standards change, I may be required to modify my installation to meet applicable standards.

Applicant Signature: _____ Date: ___ / ___ / ___ WRD File #: _____

Printed Name and Address: _____

Phone: (____) _____ Fax: (____) _____