


Oregon Department of Forestry

2600 State St Salem OR 97310

PART III: EXHIBITS
EXHIBIT B
TIMBER SALE OPERATIONS PLAN

(See page 2 for instructions)

Date Received by State: _____

(5) State Brand Information (Complete)

 (1) Contract Number: FG-341-2026-W01162-01

 (2) Sale Name: North Sun

 (3) Contract Expiration Date: 10/31/2028

(4) Purchaser Name: _____

(6) State Representatives:

<u>Name</u>	<u>Circle One</u>	<u>Phone No.</u>	<u>Cell No.</u>	<u>Alt Phone</u>
	Logging Projects All			
	Logging Projects All			
	Logging Projects All			
	Logging Projects All			

(7) Purchaser Representatives:

<u>Name</u>	<u>Circle One</u>	<u>Phone No.</u>	<u>Cell No.</u>	<u>Alt Phone</u>
	Logging Projects All			
	Logging Projects All			
	Logging Projects All			
	Logging Projects All			
	Logging Projects All			
	Logging Projects All			
	Logging Projects All			

(8) Name of Subcontractors and Start Dates:

<u>Project No.</u>	<u>Subcontractor Name.</u>	<u>Start Date</u>	<u>Completion Date</u>	<u>Cell No.</u>	<u>Alt Phone</u>

	<u>Subcontractor Name.</u>	<u>Start Date</u>	<u>Cell No.</u>	<u>Alt Phone</u>
FELLING				
YARDING				

(9) Comments:

(10) Operations Map: Attach a copy of timber sale Exhibit A or other suitable map which plainly shows the items listed on the instruction sheet.



Oregon Department of Forestry

2600 State St Salem OR 97310

PART III: EXHIBITS

EXHIBIT B


INSTRUCTION SHEET FOR OPERATIONS PLAN

SUBMIT ONE COPY OF PLAN TO STATE

Operations shall be limited to the work shown in the plan until a revised plan or supplemental plan is submitted covering additional work. Compliance with this plan is not in lieu of compliance with any federal requirements related to the federal Endangered Species Act including without limitation PURCHASER'S independent obligation to avoid take of a T&E species and PURCHASER'S obligation to comply with terms and conditions of any incidental take Permit(s) that include required minimization and mitigation measures in any applicable Habitat Conservation Plan. If STATE has prepared a required Forest Practices Act (FPA) "Written Plan" for operations, PURCHASER shall comply with all provisions of the Written Plan.

Explanation of Item No.(from Page 1)

- (5) All sales require you to use a brand furnished by STATE. If the State brand has not been assigned when the plan is submitted, it will be furnished and assigned later. Complete drawing. If more than one brand is assigned to the sale, complete both drawings.
- (6) The contract requires you to have a designated representative available on the sale area or work location who is authorized to receive in your behalf any notice or instruction given by STATE and to take action in regard to performance under the contract. If logging and project work is widely separated, a representative is required for each.
- (7) The STATE representative will be designated when your plan is approved and is the person who will inspect and issue instructions regarding performance.
- (8) Show names of subcontractors to be used for any or all phases of the operations. If subcontractors are not Known, or are changed later, give notification to the STATE representative prior to commencement of work by subcontractor.
- (9) Show projected dates for commencement of both projects and logging. If projected dates need to be changed at a later date, notification must be given to the STATE representative by supplemental plan or otherwise, prior to commencement of such operations.
- (10) The STATE representative will furnish extra copies of Exhibit A of the contract for your use in preparing the operations map. The map shall use the following legend and show:
 1. Landing locations, approximate setting boundaries, and probable sequence of logging the settings. Number the settings in sequence.
 2. Locations of spur roads planned for construction, other than required by the timber sale contract. Provide spur road specifications
 3. Locations of proposed tractor yarding roads. Show if and how marked on the ground.
 4. Locations of temporary stream crossings.
 5. List the sequence of performing project work.
 6. Location of rock sources - attach pit development plans.

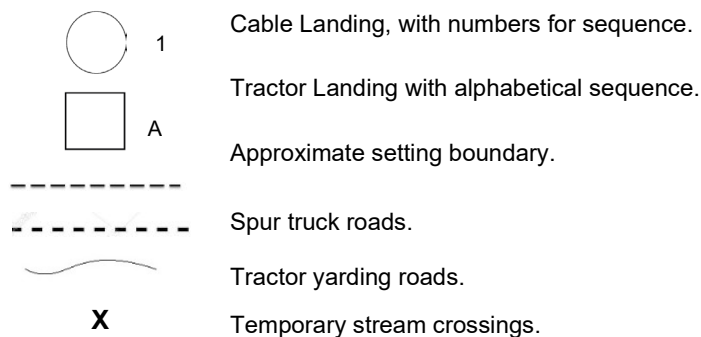




Oregon Department of Forestry
2600 State St Salem OR 97310
PART III: EXHIBITS
EXHIBIT B
OPERATIONS PLAN


Completion Timeline

Indicate on the appropriate timeline below, the dates by which you plan to complete the work as required under this contract. The purpose of this section is to develop a plan that will ensure you complete the work as required, and meet the interim completion date(s) and contract expiration date. This plan is incorporated and made a part of the contract. When, in the opinion of STATE, operations are not commencing in a manner that meets the intent of this plan, you may be placed in violation of contract and your operations suspended until an amended plan is submitted and approved by STATE.

Projects

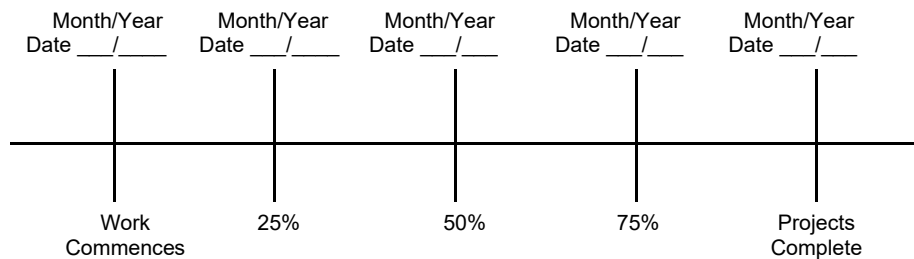

Harvest & Other Requirements

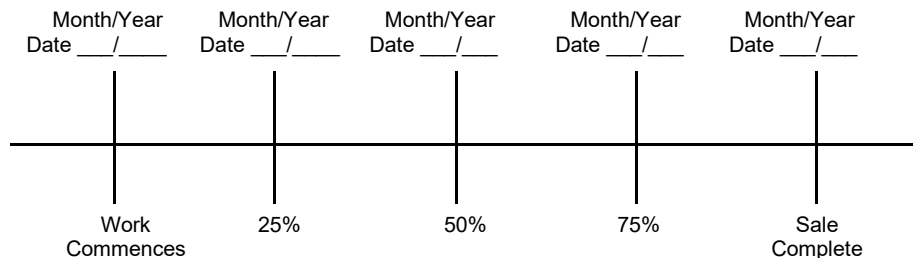

The Federal Endangered Species Act (ESA) prohibits a person from taking any federally listed threatened or endangered species. Taking under the federal ESA may include alteration of habitat. STATE's approval of this plan does not certify that PURCHASER's operation under the plan is lawful under the federal ESA or that the plan is consistent with the terms and conditions of any applicable incidental take Permit(s) including any required minimization and mitigation measures proposed in the applicable Habitat Conservation Plan. As provided in the timber sale contract, PURCHASER's must comply with all applicable state, federal, and local laws, including without limitation any Permit(s) issued thereunder.

PURCHASER's compliance with this plan is not in lieu of compliance with any federal requirements related to the federal Endangered Species Act.

APPROVED; Date: _____

SUBMITTED BY:
PURCHASER

STATE OF OREGON - DEPARTMENT OF
FORESTRY

Title _____

Title _____



Oregon Department of Forestry
EXHIBIT C - SAWMILL GRADE (WESTSIDE SCALE)
SCALING INSTRUCTIONS - LOCATION APPROVAL - BRAND INFORMATION
Forest Grove - NWOA

(1) ORIGINAL REGISTRATION ☐ Date _____
REVISION NUMBER 000 ☐ Date _____
CANCELLATION ☐ Date _____

(2) TO: _____
(Third Party Scaling Organization)

(3) FROM: Forest Grove Phone (503) 357-2191
(State Forestry District)
Address: 801 GALES CRK RD
FOREST GROVE, OR 97116-1199

(4) PURCHASER: _____
Mailing Address: _____
Phone Number: _____

(5) MINIMUM SCALING SPECIFICATIONS	
SPECIES	MINIMUM NET VOLUME
Conifers	10
Hardwoods	10

*Apply minimum volume test to whole logs over 40' Westside

(6) WESTSIDE SCALE: _____
Use Region 6 actual taper rule. Logs over 40'.


(8) APPROVED SCALING LOCATIONS (as shown on the ODF Approved Locations web-site)	YES NO		Species	Yard	Truck	Weight
	☐	☒				

(9) SALE NAME: North Sun
COUNTY: Washington

(10) STATE CONTRACT NUMBER:
FG-341-2026-W01162-01

(11) STATE BRAND REGISTRATION NUMBER:

(12) STATE BRAND INFORMATION:



(13) PAINT REQUIRED: YES ☒
COLOR: Orange

(14) SPECIAL REQUESTS (Check applicable)	
PEELABLE CULL (all species).....	☒
NO DEDUCTIONS ALLOWED FOR MECHANICAL DAMAGE	☒
ADD-BACK VOLUME - Deductions due to delay...	☒
OTHER :	

(15) REMARKS:
"Mule Trains"
1. Loads are required to have load tickets for each set of bunks.
2. If truck and pup are to be weighed, weigh and process separately for gross and tare weights.

Operator's Name (Optional inclusion by District): _____

(16) SIGNATURES:

Purchaser or Authorized Representative Date

State Forester Representative Date

State Forester Representative PRINT NAME

Notify the District within one hour when branding or painting is inadequate for quick identification, the receipts are missing, not correctly or completely filled out, and/or when logs presented for scaling are impossible to scale accurately.
General Distribution: TPSO, Approved Scaling Locations and Purchaser.



Oregon Department of Forestry
EXHIBIT C - SAWMILL GRADE
INSTRUCTIONS FOR EXHIBIT C
Forest Grove - NWOA

- (1) Check appropriate box. REVISION NUMBER requires comments. CANCELLATION requires logging and hauling to be complete, recall branding hammers.

- (2) Designate Third Party Scaling Organization (TPSO).

Columbia River Log Scaling & Grading Bureau
P.O.Box 7002, Eugene, OR 97401
Phone: (541) 342-6007 Fax: (541) 342-2631
Email: services@crls.com

Mountain Western Log Scaling & Grading Bureau
2560 NW Medical Park Drive, OR 97471
Phone: (541) 673-5571 Fax: (541) 672-6381
Email: info@mountainwestern.com

Northwest Log Scalpers Inc.
6137 NE 63rd St, Vancouver, WA, 98661
Phone: (360) 553-7212 ext. 4 Fax: (360) 553-7213
Email: info@nwlogscalpers.com

Pacific Rim Log Scaling Bureau, Inc.
8288 28th Court North East, Lacey, WA 98516
Phone: (360) 528-8710 Fax: (360) 528-8718
Email: office@prlsb.com

Yamhill Log Scaling & Grading Bureau
P.O.Box 709, Forest Grove, OR 97116
Phone: (503) 359-4474 Fax: (503) 359-4476
Email: yamhilllog@frontier.com

- (3) State District office, address and phone.
- (4) Enter Purchaser's business name, address, and phone number as it appears on the Contract.
- (5) Minimum Scaling Specifications.
- (6) Westside - Region 6 actual taper segment scale. Check Yes or No. Special Service Rules on file with TPSO. See: Segment Scaling and Grading of Long Logs - All Species - State Forestry Department Scaling Practices (Westside).
- (7) Weight Scale Sample - Check box if sale is to be a Weight Scale Sample. All specifics for handling, scaling and processing will be attached or explained in the Remarks section item (15).
- (8) Show scaling locations only applicable to TPSO. Location name should appear as it does on the ODF Approved Scaling Location web site: https://apps.odf.oregon.gov/Divisions/management/asset_management/scalinglocation.asp Locations with scaling and processing directions specific to their location should be on a separate form. Species should be identified if not capable of receiving "all" species. Check appropriate box for either: yard, truck scale, or weight. Refer to the web site listed above for the locations approval status.
- (9) Enter sale name and county.
- (10) Enter sale Contract number.
- (11) Enter Oregon's State Brand Registry Number (**REQUIRED**).
- (12) Show brand assigned to timber sale. One brand only. If more than one brand is assigned to the sale: (1) make a separate form for each brand and (2) on each form, explain and show other brand(s) in the Remarks section item (15).
- (13) Check yes for Paint Required and designate "Orange" for color. Non required removal volumes may sometimes require blue paint.
- (14) Special Requests. These are requests that will be applied to ODF timber sales. All boxes applicable to the timber sales designated in the Exhibit C form must be "marked". If "Other" is indicated, it must contain a description and any necessary comments.
- (15) Use this space to designate any weight scale sample instructions or any other explanations to clarify scaling, processing and/or mailing requirements. If additional scaling locations are approved, revise original or current form showing all (old and new) locations. Check REVISION box at top of form and explain under remarks. Route as indicated.
- (16) Require purchaser to sign and date completed form in addition to State Forester Representative, sign and print name on the form. Signatures not required on revisions.



**Oregon Department of Forestry
EXHIBIT C - PULP SORT
PROCESSING INSTRUCTIONS - LOCATION APPROVAL
BRAND INFORMATION**

Forest Grove, NWOA

(1) ORIGINAL REGISTRATION ☐ Date _____
REVISION NUMBER 000 ☐ Date _____
CANCELLATION ☐ Date _____

(9) **SALE NAME:** North Sun

COUNTY: Washington

(10) **STATE CONTRACT NUMBER:**
FG-341-2026-W01162-01

(2) TO: _____
(Approved Pulp Processing Facility)

(3) FROM: Forest Grove Phone (503) 357-2191
(State Forestry District)
Address: 801 GALES CRK RD
FOREST GROVE, OR 97116-1199

(4) PURCHASER: _____

(5) Scaling Bureau (TPSO) Processing Weight receipts:

Mailing Address: _____

Phone Number: _____

(6) **STATE Definition of Approved Pulp Sort:**


- Top portion of the tree (tops).
- All logs with a diameter (Big End) greater than 8 inches marked with blue paint.

(7) **PULP FACILITY PROCESSING INSTRUCTIONS:**

- Pulp loads shall be weighed in lieu of scaling.
- One Ton = 2000 lbs (Short Ton).
- Pulp loads shall have a yellow Log Load Receipt attached.
- Gross weight and truck tare weight for each load shall be machine printed on the weight receipt.
- Weigher shall sign the weight receipt.
- Weigher shall record the Log Load Receipt number on the weight receipt.
- Weigher shall attach the Weight receipt to the Log Load Receipt and mail them weekly to the TPSO processing the Weight receipt.

(8) **TPSO PROCESSING INSTRUCTIONS**

- Submit data files daily (or each day of activity).
- Mail or deliver scale tickets weekly to ODF Headquarters in Salem.



(13) **REMARKS:**

"Mule Trains"

1. Loads are required to have load tickets for each set of bunks.
2. Truck and pup are to be weighed and processed separately for gross and tare weights.

Operator's Name (Optional inclusion by District):

(14) **SIGNATURES:**

Purchaser or Authorized Representative Date

State Forester Representative Date

State Forester Representative PRINT NAME

Notify the District within one hour when branding is inadequate for quick identification, the logs are marked with orange paint, the receipts are missing, not correctly or completely filled out, and/or logs do not meet the specifications of the STATE definition of Approved Pulp Sort.

General Distribution: TPSO, Approved Scaling Locations and Purchaser.



**Oregon Department of Forestry
EXHIBIT C - PULP SORT
INSTRUCTIONS FOR EXHIBIT C**

Forest Grove, NWOA

- (1) Check appropriate box. REVISION NUMBER requires comments. CANCELLATION requires logging and hauling to be complete, recall branding hammers.
- (2) Approved Pulp Processing Facility. Write in as written in the Approved Log Delivery Location
https://apps.odf.oregon.gov/Divisions/management/asset_management/scalinglocation.asp
- (3) State District office, address and phone.
- (4) Enter Purchaser's business name, address, and phone number as it appears on the Contract.
- (5) Third Party Scaling Organization that will be processing the weight tickets, mailing address, and phone number.

Columbia River Log Scaling & Grading Bureau
P.O.Box 7002, Eugene, OR 97401
Phone: (541) 342-6007 Fax: (541) 342-2631
Email: services@crls.com

Pacific Rim Log Scaling Bureau, Inc.
8288 28th Court North East, Lacey, WA 98516
Phone: (360) 528-8710 Fax: (360) 528-8718
Email: office@prlsb.com

Mountain Western Log Scaling & Grading Bureau
2560 NW Medical Park Drive, Roseburg, OR 97471
Phone: (541) 673-5571 Fax: (541) 672-6381
Email: info@mountainwestern.com

Yamhill Log Scaling & Grading Bureau
P.O.Box 709, Forest Grove, OR 97116
Phone: (503) 359-4474 Fax: (503) 359-4476
Email: yamhilllog@frontier.com

Northwest Log Scalers Inc.
6137 NE 63rd St, Vancouver, WA, 98661
Phone: (360) 553-7212 ext. 4 Fax: (360) 553-7213
Email: info@nwlogscalers.com

- (6) Big end of log is not to exceed 2 inches greater than the minimum removal specifications in the contract. Example: Minimum removal specifications 6 inches and 20 board feet, then the Big end of log not to exceed 8 inches. When conifer and hardwood removal specifications are different, use the smaller removal diameter to determine this specification.
- (9) Enter sale name and county.
- (10) Enter sale Contract number.
- (11) Enter Oregon's State Brand Registry Number **(REQUIRED)**.
- (12) Show brand assigned to timber sale. One brand only, if more than one brand is assigned to the sale: (1) make a separate form for each brand and (2) on each form, explain and show other brand(s) in the Remarks section Item (13).
- (13) Use this section to list any special instructions or the reason for any revisions in section item (1).
- (14) Require purchaser to sign and date completed form in addition to State Forester Representative, sign and print name on the form. Signatures not required on revisions.

EXHIBIT D

FOREST ROAD SPECIFICATIONS

SUBGRADE WIDTH	SURFACED WIDTH	POINT TO POINT	STATION TO STATION	DRAINAGE
≥18 feet 16 feet	≥16 feet 12 feet	A to B	0+00 to 112+30 112+30 to 382+65	Ditch
Match Existing	Match Existing	B to C	0+00 to 49+45	Ditch
Match Existing	Match Existing	B to L	0+00 to 10+90	Ditch
Match Existing	Match Existing	D to E	0+00 to 8+55	Ditch
Match Existing	Match Existing	F to G	0+00 to 11+75	Ditch
Match Existing	Match Existing	H to I	0+00 to 2+35	Ditch
Match Existing	Match Existing	J to K	0+00 to 4+90	Ditch
16 feet	12 feet	L to M	0+00 to 12+15	Ditch
16 feet	12 feet	L to N	0+00 to 5+70	Ditch
16 feet	12 feet	O to P	0+00 to 6+50	Ditch

CLEARING. This work shall consist of clearing, removing, and disposing of all trees, Snags, Down Timber, brush, surface objects, and protruding obstructions within the clearing limits. All danger trees, leaners, and Snags outside the clearing limits which could fall and hit the road shall be felled.

CLEARING CLASSIFICATION.

New Construction - Where clearing limits have not been marked, the clearing limits shall extend 5 feet back of the top of the cutslope and 5 feet out from the toe of the fill slope, or as directed by STATE.

Improvement -Where clearing limits have not been marked, the clearing limits shall extend 5 feet back of the top of the cutslope and 10 feet out from the toe of the fill slope, or as directed by STATE.

GRUBBING. This work shall consist of the removal or digging out of stumps and protruding objects. All stumps shall be completely removed within the limits of required grubbing. Stumps overhanging cutslopes shall be removed.

GRUBBING CLASSIFICATION.

New construction - from the top of the cutslope to the toe of the fill.

Improvements and reconstructions - 4 feet back from the shoulder of the subgrade or ditch, whichever is widest, or as marked in the field.

CLEARING AND GRUBBING DISPOSAL. Clearing and grubbing debris shall not be placed or permitted to remain in or under any road embankment sections. Clearing and grubbing debris shall be left in a stable location, and not left lodged against standing trees. Clearing and grubbing debris may be scattered through openings in the timber outside of the cleared right-of-way, except for the following areas where debris shall be fully contained and hauled to a designated waste area:

- Where end-haul is required
- On side slopes exceeding 55 percent
- On unstable areas
- In any stream channel or where material may enter the stream channel.

Clearing, grubbing, and associated disposal shall be completed prior to subgrade approval.

EXHIBIT D

FOREST ROAD SPECIFICATIONS

EXCAVATION. Excavation and grading shall not be done when weather and/or ground conditions are such that damage will result to existing subgrade or cause excessive erosion.

Excavation shall conform to STATE-specified lines, grades, dimensions, and plans when provided.

Excavated materials shall not be placed within an RCA.

Unless road plans show otherwise, all roads shall be on a balanced cross section, except when the slope is over 50 percent, the road shall be on full bench for the width specified.

Suitable excavated material shall be used for the formation of fills, shoulders, and drainage structure backfills. Embankment materials shall be free of woody debris, brush, muck, sod, frozen material, and other deleterious materials.

Sidecast includes any road generated excess excavation material which is not essential as part of the road prism, is not compacted, and is below the roadway. Sidecast shall not be placed where it will enter a stream course. Leaving sidecast below the road is only permissible if specifically allowed in "Full Bench and End Haul Requirements" in this Exhibit.

ROAD WIDTH LIMITATIONS. PURCHASER shall obtain advance written approval from STATE to construct the road to a greater width than specified. Extra subgrade width shall be required for:

Fill Widening. Add to each fill shoulder 1 foot for fills 3 feet to 6 feet high; 2 feet for fills over 6 feet high.

Curve Widening. Widen the inside shoulder of all curves as specified in the plans or as follows: 400 divided by the radius of the curve equals the amount of extra width.

DRAINAGE. Drainage features shall be in place as soon as possible during construction and prior to October 31 annually. Drainage features shall include:

Subgrade. Subgrade shall be crowned, outsloped, or insloped at 4 to 6 percent as shown on the "Forest Road Specifications" table in this Exhibit.

Ditch. Construct "V" shaped ditch 3 feet wide and to a depth of 1 foot below subgrade.

Ditchouts. Construct ditchouts to drain away from subgrade at locations marked in the field or as directed by STATE.

TURNOUTS. Increase roadbed width an additional 8 feet for both subgrade and surfacing. Length shall be at least 25 feet, plus 25-foot approaches at each end. Location: Intervisible but not greater than 750 feet apart.

SLOPES. Top of cutslope shall be rounded.

Solid Rock

Fractured Rock

Soil - side slopes 50% and over

Soil - side slopes less than 50%

Cutslopes

Vertical to $\frac{1}{4}$:1

$\frac{1}{4}$:1

$\frac{1}{2}$:1

$\frac{3}{4}$:1

Fill Slopes

$1\frac{1}{2}$:1

$1\frac{1}{2}$:1

LANDINGS. Landings shall be constructed no less than 50 feet wide and no more than 70 feet wide unless otherwise stated or approved by STATE. Surface is to be outsloped or crowned for drainage with general grade no more than 3 percent. Surface as shown in the "Road Surfacing" table in this Exhibit, with 2 feet of subgrade extending out from base of the surfacing.

TURNAROUNDS. Increase subgrade width an additional 20 feet for a length of 20 feet at locations marked in the field.

Excavated Materials. All surplus excavation materials shall be hauled to the waste areas as marked in the field and/or designated on Exhibit A. No excavated material shall remain within any RCA.

Bank Slough Removal. Excavate all bank slough. Bank slough material shall not be pulled across existing surfacing rock. Excavated material, including woody debris shall be loaded and hauled to designated waste areas and shall be accomplished with the use of an excavator and dump truck.

EXHIBIT D

FOREST ROAD SPECIFICATIONS

GENERAL ROAD IMPROVEMENT, SURFACE ROCK REPLACEMENT AND MAINTENANCE INSTRUCTIONS:

Drainage Ditches. Restore or construct ditchlines, including ditchouts, as directed by STATE. Clean out all culvert inlets and outlets for a 10-foot radius. Re-establish or construct culvert sediment basins. Waste materials from drainage ditches and sediment basins shall not be pulled across existing rock surfacing but shall be loaded with an excavator, hauled by dump truck and placed in designated waste areas. Vegetation in the ditch shall not be removed if ditch conditions are acceptable by STATE.

Ditch Armoring. Where rock is specified for ditch armor, rock shall be machine placed and tamped covering the entire ditch at 8 inches deep.

Culvert Replacement and Installation. Existing culvert geometry shall be modified to provide for optimum drainage and culvert performance. Modifications may include skewing the culvert and/or installing the culvert at gradients equal to or exceeding the drainage or ditch gradient. Culvert installation shall meet the requirements of the "Culvert Specifications" exhibit. All surplus material shall be hauled and placed in designated waste areas. Vegetation in the ditch shall not be removed if ditch conditions are acceptable by STATE

Energy Dissipator Construction. Where rock is used for an energy dissipator, rock shall be placed below the culvert outlet and embedded for a minimum of 3 feet, in accordance with the "Energy Dissipator Exhibit".

Fill Reconstruction, and Fill Removal. Where fill reconstruction or Live Stream culvert replacement is specified, fills shall be excavated to natural stream course levels. All woody debris encountered during fill excavation shall be removed. Fill reconstruction backfill shall consist of select materials and may be obtained from borrow pits, as directed by STATE. Unsuitable backfill material shall be hauled to the designated waste areas as marked in the field and/or designated on Exhibit A. Backfill materials shall be hauled in where necessary.

Fill Armor. Where rock is specified for fill armor, rock shall be machine placed and tamped at a 1½:1 slope, beginning at the toe of the fill.

Settling Ponds. Construct settling ponds for erosion control in project areas and ditchlines where sedimentation or erosion is possible as directed by STATE. Excavated material shall be hauled to the designated waste areas designated on Exhibit A. Waste materials shall be sloped and compacted for drainage. Settling pond dimensions shall be a finished length of 3 feet, width of 3 feet, depth of 3 feet and 3 feet apart, or as directed by STATE.

Sidecast Pullback. Excavate/pullback all previously sidecast materials below the road. Developed slopes shall be pulled back to a 1½:1 slope or to natural ground contours. The beginning position for sidecast pullback shall be no greater than 20 feet vertical distance from the existing road surface. Sidecast material remaining greater than 20 feet below the road shall be tapered and sloped for drainage.

Sod Removal. Remove/ separate sod from crushed rock surfacing as directed by STATE. Sod material shall be scattered in stable locations through openings in the timber outside of the cleared right-of-way. In areas where sod cannot be scattered in a stable location, material shall be end hauled to designated waste areas as shown in Exhibit A, or other stable locations as directed by STATE.

Erosion Control. Install erosion control measures in all areas which have the potential, as determined by STATE, to deliver sediment to Waters of the State. Install bio bags, silt fence, or straw bales for erosion control in project areas and ditch lines where sedimentation or erosion is possible, as directed by STATE. Each Bio-bag shall be installed with a minimum of two wooden stakes.

Material Storing and Staging. No materials shall be stored or staged within the boundaries of any riparian conservation area or equipment restriction zone. To include dirt, soil, aggregate and fuel stored in fuel cans, transfer tanks, vehicles or equipment. Staging areas must be constructed in a manner so that to be hydrologically disconnected from the stream. Culverts, logs for stream enhancement and erosion control supplies may be stored within the boundaries.

Seasonal Winterization. All unsurfaced roads or unfinished subgrades shall be blocked from vehicular traffic and waterbarred in accordance with the Waterbar and Tank Trap specifications in this contract. Areas of bare soil that have the potential to deliver sediment shall have grass seed and mulch placed in accordance to the Seeding and Mulch specification in this contract. All seasonal winterization shall be completed prior to October 31, annually and as directed by STATE.

EXHIBIT D
FOREST ROAD SPECIFICATIONS

GENERAL ROAD IMPROVEMENT, SURFACE ROCK REPLACEMENT AND MAINTENANCE INSTRUCTIONS:

Subgrade Preparation and Application of Surfacing Rock.

- (a) Complete culvert installations, drainage ditches, fill construction, ditchouts, settling ponds and other specified work prior to the application of surfacing rock.
- (b) Cut out all potholes and/or washboard sections from the existing surfacing and apply any required subgrade reinforcement or spot rock.
- (c) Process, grade and mix, the existing surface. Provide for a crown, outslope, or inslope of 4 to 6 percent, and compact in accordance with the "Compaction and Processing Requirements" in this exhibit.
- (d) Upon completion of above required work, apply, process, and compact surfacing rock in accordance with this exhibit.

EXHIBIT D

FOREST ROAD SPECIFICATIONS

SPECIFIC ROAD IMPROVEMENT, SURFACE ROCK REPLACEMENT AND MAINTENANCE INSTRUCTIONS:

<u>Segment</u>	<u>Station</u>	<u>Work Description</u>
A to B	0+00	Point A. Beaverdam Road at junction with BD6 Road on left. ☐ Begin road improvement. ☐ Crown road. ☐ Clean or construct ditchlines on right and left.
	1+90	☐ Construct ditchout on right. ☐ End ditch on right.
	3+65	☐ Begin ditch on right.
	5+85	Existing culvert. ☐ Clean inlet and outlet.
	6+60	Existing culvert. ☐ Install marker. ☐ End ditch on right.
	8+05	6.5 Mile marker on right.
	8+35	Junction with road on right.
	8+55	☐ Begin ditch on right.
	10+40	☐ End ditch on right.
	11+45	Existing culvert. ☐ Clean inlet and outlet. ☐ Install marker.
	13+45	☐ Clean 3 existing settling ponds on left.
	14+35	Live Stream. Existing culvert.
	15+35	Live Stream. Existing culvert.
	15+65	☐ Clean 3 existing settling ponds on left. ☐ Begin ditch on right. ☐ Construct 3 settling ponds in ditch on right.
	16+25	Existing culvert. ☐ Clean inlet and outlet. ☐ Install marker. ☐ Construct ditchout on right.
	17+90	Existing culvert. ☐ End ditch on right.
	20+75	Existing culvert. ☐ Clean inlet and outlet. ☐ Install marker.
	24+30	☐ Install Culvert No. 1 (18" x 30') as cross drain.
	25+90	☐ Remove existing culvert.
	27+25	☐ Remove stump on left.
	29+25	Junction with OHV trail on left. ☐ Maintain trail access.
	29+95	☐ Install Culvert No. 2 (18" x 30') as cross drain.
	31+25	Existing culvert. ☐ Install marker.
	33+80	Junction on left. ☐ Remove existing culvert. ☐ Continue ditch across spur.
	34+65	7 mile marker on left.

EXHIBIT D

FOREST ROAD SPECIFICATIONS

SPECIFIC ROAD IMPROVEMENT, SURFACE ROCK REPLACEMENT AND MAINTENANCE INSTRUCTIONS:

<u>Segment</u>	<u>Station</u>	<u>Work Description</u>
A to B Continued	35+30	Junction on left. ☐ Remove existing culvert. ☐ Continue ditch across spur.
	36+45	☐ Begin road brushing.
	36+60	Existing culvert. ☐ Install marker.
	37+75	☐ End road brushing.
	39+75	Existing culvert. ☐ Clean inlet and outlet.
	39+80	☐ Begin ditch on right.
	40+80	☐ Remove two stumps on right.
	43+00	☐ Remove stump on right. ☐ End ditch on right.
	43+60	☐ Install Culvert No. 3 (18" x 50') as cross drain.
	43+70	☐ Remove existing angle iron road sign on left.
	43+90	☐ Remove existing culvert.
	44+10	Junction with BD7 on right.
	44+60	☐ Remove stump on left.
	46+40	☐ Install Culvert No. 4 (18" x 30') as cross drain.
	48+45	☐ Remove existing culvert.
	51+45	Existing culvert. ☐ Install marker.
	55+85	Existing culvert. ☐ Clean inlet and outlet. ☐ Replace marker.
	56+30	☐ Begin ditch on right.
	60+00	7.5 mile marker on right.
	60+20	Existing culvert. ☐ Clean inlet and outlet. ☐ Install marker.
	62+00	Junction on right. ☐ End ditch on left and right.
	63+90	☐ Construct ditchout. ☐ Begin ditch on right.
	67+40	Existing culvert. ☐ Install marker.
	71+40	Existing culvert. ☐ Clean inlet and outlet.
	72+65	☐ Begin ditch on left.
	74+15	☐ Construct ditchout on left.
	74+25	Boulder pile on right. ☐ Place boulders in Y-Junction of OHV trail on left.
	74+50	Junction with OHV trail on left. ☐ Maintain trail access.

EXHIBIT D

FOREST ROAD SPECIFICATIONS

SPECIFIC ROAD IMPROVEMENT, SURFACE ROCK REPLACEMENT AND MAINTENANCE INSTRUCTIONS:

<u>Segment</u>	<u>Station</u>	<u>Work Description</u>
A to B Continued	75+00	☐ Install Culvert No. 5 (18" x 30') as cross drain. ☐ End ditch on right.
	78+20	Live Stream. Existing culvert.
	78+60	Existing culvert. ☐ Clean inlet and outlet.
	82+45	Existing culvert. ☐ Clean inlet and outlet.
	83+90	☐ Place 8 blocking boulders as inside corner/ditch protection.
	84+75	☐ Construct ditchout on left. ☐ Begin ditch on left.
	85+10	☐ End ditch on right.
	86+20	8 mile marker on left.
	87+95	Junction with OHV trail on right. ☐ Maintain trail access.
	88+60	Existing culvert. ☐ Install marker.
	88+70	Junction with OHV trail on left. ☐ Maintain trail access.
	91+70	Existing culvert. ☐ Install marker.
	99+80	Existing culvert. ☐ Install marker.
	104+30	Existing culvert. ☐ Install marker.
	105+95	Live Stream. ☐ Remove existing culvert and install Culvert No. 6 (24" x 40').
	106+00	☐ Begin ditch on left.
	106+15	Existing culvert. ☐ Install marker.
	107+85	Existing culvert. ☐ Install marker.
	110+20	Existing culvert. ☐ Clean inlet and outlet. ☐ Clean ditch out.
	111+45	8.5 mile marker on left. ☐ End ditch on left.
	112+30	Junction with Saddle Mountain Road. ☐ Continue road improvement right onto Saddle Mountain Road.
	112+35	☐ Remove existing angle iron road sign on left.
	113+00	Existing culvert. ☐ Clean inlet and outlet.
	113+50	Junction with C-Line Road. ☐ Continue road improvement right onto C-Line Road. ☐ End ditch on left. ☐ Begin ditch on left.
	113+80	☐ Remove existing angle iron road sign on right.
	115+60	11.5 mile marker on right. Existing culvert. ☐ Install marker.

EXHIBIT D

FOREST ROAD SPECIFICATIONS

SPECIFIC ROAD IMPROVEMENT, SURFACE ROCK REPLACEMENT AND MAINTENANCE INSTRUCTIONS:

A to B Continued	116+30	Existing culvert ☐ Replace marker.
	116+40	☐ Begin ditch on right.
	120+75	Existing culvert. ☐ Install marker.
	121+10	☐ End ditch right.
	122+95	Junction with OHV trail on left. ☐ Maintain trail access.
	123+25	Existing culvert. ☐ Install marker.
	123+80	Junction with OHV trail on right. ☐ Maintain trail access. ☐ Begin ditch on right.
	125+75	☐ End ditch on right.
	127+60	☐ Remove existing culvert.
	128+60	☐ Install Culvert No. 7 (18" x 30') as cross drain.
	134+90	Live Stream. Existing culvert. ☐ Construct 3 settling ponds on left side of inlet.
	135+50	Existing culvert. ☐ Construct 3 settling ponds on left side of inlet.
	135+75	☐ Install Culvert No. 8 (18" x 40') as disconnect. Install 20' upslope of culvert tag in field.
	139+50	Existing culvert. ☐ Clean inlet and outlet.
	142+15	☐ Construct ditch to direct seep into existing culvert.
	142+45	Existing culvert. ☐ Install marker.
	143+80	☐ Install Culvert No. 9 (18" x 30') as disconnect. Position outlet to facilitate flow away from stream. Install 15' upslope of culvert tag in field. ☐ Begin double ditch on left.
	144+80	Live Stream. Existing culvert. ☐ Construct ditch over existing culvert. ☐ Place 12 cy of riprap as energy dissipator at outlet.
	145+00	☐ Construct 3 settling ponds on left side of road. ☐ End double ditch on left.
	145+45	☐ Begin road widening to construct ditch on left. (Rock showing in cutslope.) ☐ Scatter material to right. ☐ Do not damage existing trestle on right.
	147+75	☐ End road widening.
	147+80	☐ Begin ditch on right.
	149+15	Existing culvert. ☐ Install marker.
	149+25	☐ Remove stump on right.
	150+40	☐ End ditch on right.
	151+25	☐ Install Culvert No. 10 (18" x 30') as disconnect.
	151+30	☐ Begin double ditch on left.

EXHIBIT D

FOREST ROAD SPECIFICATIONS

SPECIFIC ROAD IMPROVEMENT, SURFACE ROCK REPLACEMENT AND MAINTENANCE INSTRUCTIONS:

<u>Segment</u>	<u>Station</u>	<u>Work Description</u>
A to B Continued	151+65	Live Stream. Existing culvert. ☐ Construct ditch over existing culvert. ☐ Replace marker.
	152+20	Live Stream. Existing culvert. ☐ Construct ditch over existing culvert. ☐ Install marker.
	154+20	Existing culvert. ☐ Install marker. ☐ Remove flume and place 12 cy of riprap as energy dissipator at outlet. ☐ End double ditch on left.
	157+60	Junction on right.
	159+50	Existing culvert. ☐ Clean inlet and outlet.
	161+90	Existing culvert. ☐ Install marker.
	162+95	10.5 mile marker on right.
	163+40	☐ Begin ditch on right.
	164+85	Existing culvert. ☐ Replace marker. ☐ End ditch on right.
	165+80	☐ Begin double ditch on left.
	166+80	Existing culvert. ☐ Clean inlet and outlet. ☐ Replace marker.
	168+30	☐ End double ditch on left at grade change.
	170+05	☐ Install Culvert No. 11 (18" x 30') as disconnect.
	170+45	Live Stream. Existing culvert. ☐ Remove flume and place 24 cy of riprap as energy dissipator at outlet. ☐ Construct 3 settling ponds on right side of inlet.
	170+85	☐ Install Culvert No. 12 (18" x 30') as disconnect.
	171+10	Live Stream. Existing culvert. ☐ Construct ditch over existing culvert. ☐ Remove flume and place 24 cy of riprap as energy dissipator at outlet.
	172+65	Existing culvert. ☐ Clean inlet and outlet.
	176+35	Existing culvert. ☐ Install marker.
	179+40	Existing culvert. ☐ Clean inlet and outlet. ☐ Replace marker.
	181+95	Existing culvert. ☐ Clean inlet and outlet. ☐ Replace marker.
	187+20	Live Stream. Existing culvert. ☐ Install marker. ☐ Construct 3 settling ponds on left side of inlet.

EXHIBIT D

FOREST ROAD SPECIFICATIONS

SPECIFIC ROAD IMPROVEMENT, SURFACE ROCK REPLACEMENT AND MAINTENANCE INSTRUCTIONS:

<u>Segment</u>	<u>Station</u>	<u>Work Description</u>
A to B Continued	118+10	☐ Construct 3 settling ponds on left.
	188+80	10 mile marker on left.
	191+40	Live Stream. Existing culvert. ☐ Install marker. ☐ Remove flume and place 12 cy of riprap as energy dissipator at outlet.
	192+15	Live Stream. Existing culvert. ☐ Install marker. ☐ Remove flume and place 12 cy of riprap as energy dissipator at outlet.
	195+40	☐ Begin ditch on right.
	195+60	Junction on right. ☐ Construct ditch through existing junction.
	198+10	Junction on right. ☐ Continue ditch across spur on right. ☐ Construct tank trap across spur behind ditch.
	198+95	☐ End ditch on right.
	200+35	Existing culvert. ☐ Install marker.
	206+70	Existing culvert. ☐ Install marker.
	209+15	Existing culvert. ☐ Install marker.
	210+60	Existing culvert. ☐ Install marker.
	211+20	☐ End ditch on left.
	212+10	Reload Stockpile on left and right.
	213+25	☐ Begin ditch on left and right. (Rock showing in cutslope.)
	214+60	☐ End ditch on right.
	216+25	Existing culvert. ☐ Install marker.
	216+75	Junction with Tie Road. ☐ Continue road improvement left onto Tie Road. ☐ Begin road widening to construct ditch on left. (Rock showing in cutslope.) ☐ End-haul material to waste area.
	219+15	☐ End road widening.
	220+95	Existing culvert. ☐ Clean inlet and outlet.
	222+70	Saddle Stockpile on right.
	222+75	Junction with Seven Cedars Road. ☐ Continue road improvement left onto on Seven Cedars Road. ☐ End ditch on left.
	224+05	Junction with OHV trail on right. ☐ Maintain trail access. ☐ Begin road brushing.

EXHIBIT D

FOREST ROAD SPECIFICATIONS

SPECIFIC ROAD IMPROVEMENT, SURFACE ROCK REPLACEMENT AND MAINTENANCE INSTRUCTIONS:

Segment	Station	Work Description
A to B Continued	224+60	Existing culvert. ☐ Clean inlet and outlet. ☐ Replace marker. ☐ Begin ditch on right.
	227+55	☐ Begin removing stumps and debris on left.
	228+05	☐ Begin cutslope layback. (Rock showing in cutslope.) ☐ Begin road widening to construct ditch on right. ☐ Scatter material to left.
	229+20	Existing culvert. ☐ Clean inlet and outlet.
	233+30	Existing culvert. ☐ Remove flume and place 12 cy of riprap as energy dissipator at outlet. ☐ End cutslope layback. ☐ End road widening.
	235+00	Existing culvert. ☐ Clean inlet and outlet.
	235+55	☐ End stump and debris removal on left.
	243+10	Junction with OHV trail on right and left. ☐ Maintain trail access. ☐ End ditch on right.
	243+20	☐ Begin ditch on left.
	243+60	☐ Remove stump on right.
	244+05	☐ Remove stump on left.
	245+55	Existing culvert. ☐ Install marker.
	247+90	☐ Install Culvert No. 13 (18" x 30') as cross drain.
	248+30	Junction with Seven Cedars Stockpile on right.
	248+60	Junction on left.
	248+85	Junction with 900 Spur Road. ☐ Continue road improvement right onto 900 Spur Road.
	253+65	Existing culvert. ☐ Clean inlet and outlet.
	254+75	☐ Remove three stumps on right.
	256+10	☐ Remove stump on right.
	259+24	☐ Improve turnaround on right.
	259+70	Existing culvert. ☐ Clean inlet and outlet.
	260+75	☐ Remove existing gate. ☐ Install HD Gate according to the specifications in Exhibit H.
	262+25	Junction on left.
	263+95	Property line with Stimson.
	275+10	Junction on left.
	283+20	Junction on left.
	292+25	Junction with Stimson Mainline, 2500, and Williams Road. ☐ Continue road improvement straight onto Williams Road.

EXHIBIT D

FOREST ROAD SPECIFICATIONS

SPECIFIC ROAD IMPROVEMENT, SURFACE ROCK REPLACEMENT AND MAINTENANCE INSTRUCTIONS:

A to B Continued	301+00	Junction with Go-Back Road. ☐ Continue road improvement left onto Go-Back Road.
	301+45	☐ Begin road widening on left to construct ditch. (Rock showing in cutslope.) ☐ End-haul material to waste area.
	304+75	☐ End road widening on left. ☐ End ditch construction.
	309+90	Junction on right.
	311+90	Junction on left.
	326+15	Junction on left.
	345+25	Junction on right.
	351+35	Property line with Stimson. ☐ End road brushing.
	353+30	☐ Begin road widening on right to construct ditch. ☐ Scatter material to left.
	353+45	☐ Remove stump on left. ☐ Backfill stump hole with suitable material.
	354+20	☐ End road widening.
	365+45	Timber Sale Boundary.
	376+05	Timber Sale Boundary.
	378+05	Point P. Junction with O to P on right.
	381+90	Property line with Stimson. ☐ Begin road brushing.
End	382+65	Point B. ☐ End road improvement. ☐ End road brushing.

<u>Segment</u>	<u>Station</u>	<u>Work Description</u>
B to C	0+00	Point B. ☐ Begin road improvement. ☐ Crown road. ☐ Clean or construct ditchlines. ☐ Begin road brushing. ☐ Construct turnouts to the specification in this exhibit.
	5+70	Existing culvert. ☐ Install marker.
	6+40	Property line with Stimson.
	9+75	Existing culvert. ☐ Clean inlet and outlet. ☐ Install marker.
	16+40	Existing culvert. ☐ Clean inlet and outlet. ☐ Install marker.
	18+40	Point D. Junction with D to E on right. Timber sale boundary.
	31+95	Existing culvert. ☐ Clean inlet and outlet. ☐ Install marker.
	33+40	Point F. Junction with F to G on right.

EXHIBIT D

FOREST ROAD SPECIFICATIONS

SPECIFIC ROAD IMPROVEMENT, SURFACE ROCK REPLACEMENT AND MAINTENANCE INSTRUCTIONS:

<u>Segment</u>	<u>Station</u>	<u>Work Description</u>
B to C Continued	37+90	Point H. Junction with H to I on right.
	45+10	Existing culvert. ☐ Clean inlet and outlet. ☐ Install marker.
	46+50	Point J. Junction with J to K on right.
	48+95	☐ Construct turnaround.
End	49+45	Point C. ☐ End road improvement. ☐ End road brushing. ☐ Improve landing.

<u>Segment</u>	<u>Station</u>	<u>Work Description</u>
B to L	0+00	Point B. ☐ Begin road improvement. ☐ Crown road. ☐ Clean or construct ditchlines. ☐ Begin road brushing.
End	10+90	Point L. ☐ End road improvement. ☐ End road brushing. ☐ Improve landing.

<u>Segment</u>	<u>Station</u>	<u>Work Description</u>
D to E	0+00	Point D. ☐ Begin road improvement. ☐ Crown road. ☐ Clean or construct ditchlines. ☐ Begin road brushing.
	8+05	☐ Construct turnaround.
End	8+55	Point E. ☐ End road improvement. ☐ End road brushing. ☐ Improve landing.

<u>Segment</u>	<u>Station</u>	<u>Work Description</u>
F to G	0+00	Point F. ☐ Begin road improvement. ☐ Crown road. ☐ Clean or construct ditchlines. ☐ Begin road brushing. ☐ Construct turnouts to the specification in this exhibit.
	11+25	☐ Construct turnaround.
End	11+75	Point G. ☐ End road improvement. ☐ End road brushing. ☐ Improve landing.

EXHIBIT D

FOREST ROAD SPECIFICATIONS

SPECIFIC ROAD IMPROVEMENT, SURFACE ROCK REPLACEMENT AND MAINTENANCE INSTRUCTIONS:

<u>Segment</u>	<u>Station</u>	<u>Work Description</u>
H to I	0+00	Point H. ☐ Begin road improvement. ☐ Crown road. ☐ Clean or construct ditchlines.
	1+35	☐ Construct turnaround.
End	2+35	Point I. ☐ End road improvement. ☐ Improve landing.

<u>Segment</u>	<u>Station</u>	<u>Work Description</u>
J to K	0+00	Point J. ☐ Begin road improvement. ☐ Crown road. ☐ Clean or construct ditchlines. ☐ Begin road brushing.
	4+40	☐ Construct turnaround.
End	4+90	Point K. ☐ End road improvement. ☐ End road brushing. ☐ Improve landing.

EXHIBIT D

FOREST ROAD SPECIFICATIONS

GENERAL ROAD CONSTRUCTION INSTRUCTIONS:

Excavated Materials. Excavated materials shall be utilized for road construction and hauled in where required. All surplus excavation materials shall be hauled to the waste areas as marked in the field and/or designated on Exhibit A. Surplus excavated materials and waste materials shall be sloped and compacted for drainage.

Drainage Ditches. Construct ditchlines, including ditchouts, as directed by STATE. Cutslopes of ditchlines and ditchouts shall not exceed a 1:1 slope. Construct culvert sediment basins. Waste materials from drainage ditches and sediment basins shall be placed in nearby waste areas and uniformly sloped and compacted for drainage, as directed by STATE.

Culvert Installation. Fill construction backfill shall consist of select materials and may be obtained from borrow pits, as directed by STATE. Backfill materials shall be hauled in where necessary and thoroughly compacted in accordance with this Exhibit. Culvert installation shall meet the requirements of the "Culvert Specifications" exhibit.

Energy Dissipator Construction. Where rock is used for an energy dissipator, rock shall be placed below the culvert outlet and embedded for a minimum of 3 feet, in accordance with the "Energy Dissipator Exhibit".

Fill Armor. Where rock is specified for fill armor, rock shall be machine placed and tamped at a 1½:1 slope, beginning at the toe of the fill.

Settling Ponds. Construct settling ponds for erosion control in project areas and ditchlines where sedimentation or erosion is possible as directed by STATE. Excavated material shall be hauled to the designated waste areas designated on Exhibit A. Waste materials shall be sloped and compacted for drainage. Settling pond dimensions shall be a finished length of 3 feet, width of 3 feet, depth of 3 feet and 3 feet apart, or as directed by STATE.

Erosion Control. Install erosion control measures in all areas which have the potential, as determined by STATE, to deliver sediment to Waters of the State. Install bio bags, silt fence, or straw bales for erosion control in project areas and ditch lines where sedimentation or erosion is possible, as directed by STATE. Each Bio-bag shall be installed with a minimum of two wooden stakes.

Material Storing and Staging. No materials shall be stored or staged within the boundaries of any riparian conservation area or equipment restriction zone. To include dirt, soil, aggregate and fuel stored in fuel cans, transfer tanks, vehicles or equipment. Staging areas must be constructed in a manner so that to be hydrologically disconnected from the stream. Culverts, logs for stream enhancement and erosion control supplies may be stored within the boundaries.

Seasonal Winterization. All unsurfaced roads or unfinished subgrades shall be blocked from vehicular traffic and waterbarred in accordance to the Waterbar and Tank Trap specifications in this contract. Areas of bare soil that have the potential to deliver sediment shall have grass seed and mulch placed in accordance to the Seeding and Mulch specification in this contract. All seasonal winterization shall be completed prior to October 31, annually and as directed by STATE.

Subgrade Preparation and Application of Surfacing Rock.

- (a) Complete culvert installations, drainage ditches, fill construction, ditchouts, settling ponds, and other specified work prior to the application of surfacing rock.
- (b) Subgrade shall be crowned, outsloped, or insloped at 4 to 6 percent.
- (c) Upon completion and approval by STATE of above required work, apply, process, and compact surfacing rock in accordance with specifications in the "Compaction and Processing Requirements" in this exhibit.
- (d) Final road surface shall be crowned, outsloped, or insloped at 4 to 6 percent, to the depth specified in the "Rock Table" in this exhibit.

EXHIBIT D

FOREST ROAD SPECIFICATIONS

SPECIFIC ROAD CONSTRUCTION INSTRUCTIONS:

<u>Segment</u>	<u>Station</u>	<u>Work Description</u>
L to M	0+00	Point L. ☐ Begin road construction. ☐ Crown road. ☐ Construct ditch. (Road follows old grade.)
	3+35	☐ Construct 100' spur with landing on right. ☐ Begin drift on maintain grade ≤16%.
	4+10	☐ End drift.
	9+60	☐ Construct 165' spur with landing on left.
	11+55	☐ Construct 110' spur with landing on right.
End	12+15	Point M. ☐ End road construction. ☐ Construct landing.

<u>Segment</u>	<u>Station</u>	<u>Work Description</u>
L to N	0+00	Point L. ☐ Begin road construction. ☐ Crown road. ☐ Construct ditch.
	End	5+70 Point N. ☐ End road construction. ☐ Construct landing.

<u>Segment</u>	<u>Station</u>	<u>Work Description</u>
O to P	0+00	Point O. ☐ Begin road construction. ☐ Crown road. ☐ Construct ditch.
	End	6+50 Point P. ☐ End road construction.

EXHIBIT D

WASTE AREA AND END-HAUL REQUIREMENTS

Waste Area Location

- Waste Areas shall be located outside of all RCAs and ERZs.
- Waste Areas shall be hydrologically disconnected from Live Streams.
- Shall be located as shown on Exhibit A, as marked in the field or as approved by STATE.
- Setback from slope break shall be a minimum of 20 feet horizontal measurement.

Waste Area Treatment

- Deposit at waste area, spread evenly, compact, and provide adequate drainage.
- Pile woody debris separate from other waste material.
- Mulch and seed all waste areas in accordance with Exhibit I.

End-Haul Area - General Requirements

Sidecast includes any road generated excess excavation material which is not essential as part of the road prism, is not compacted, and is below the roadway. Material shall not be sidecast unless specified above.

Containment/Sidecast

- Full: No excavated material remains below the road.

Any amount of material exceeding the containment requirements shall be removed by whatever means necessary and end-hauled to a designated waste area.

EXHIBIT D
ROCK TABLE

ROAD SEGMENT: A to B				Sta. to Sta.				TOTAL VOLUME (CY)
Application	Rock Size and Type	Location	Depth of Rock (inches)	0+00 to 382+65				
				Volume (CY) Per		Number of		
Culvert Bedding /Backfill	1 ½" – 0 Crushed	Culvert Nos. 1 – 13	Varies	Culvert	24	Culverts	13	312
Energy Dissipator	Riprap	144+80, 154+20, 191+40 192+15 & 233+30	Varies	Culvert	12	Culverts	5	60
Energy Dissipator	Riprap	170+45 & 171+10	Varies	Culvert	24	Culverts	2	48
Blocking Boulders	Large Riprap	83+90	NA	Boulder	1	Boulders	8	8
Surfacing Rock	1 ½" – 0 Crushed	301+00 to 351+35	6	Station	31	Stations	50.35	1,561
Spot Rock	1 ½" – 0 Crushed	A to B	Varies	NA		NA		800
Turnout	1 ½" – 0 Crushed	A to B	4	Turnout	10	Turnouts	27	270
Turnaround	1 ½" – 0 Crushed	259+24	12	Turnaround	20	Turnarounds	1	20
Curve Widening	1 ½" – 0 Crushed	83+90 to 84+90	6	Station	12	Stations	1	12
Total Rock for Road Segment:								3,091

ROAD SEGMENT: B to C				Sta. to Sta.				TOTAL VOLUME (CY)
Application	Rock Size and Type	Location	Depth of Rock (inches)	0+00 to 49+45				
				Volume (CY) Per		Number of		
Spot Rock	3" – 0 Crushed	B to C	Varies	NA		NA		50
Turnout	3" – 0 Crushed	B to C	12	Turnout	29	Turnouts	3	87
Turnaround	3" – 0 Crushed	48+95	12	Turnaround	20	Turnarounds	1	20
Traction Rock	1 ½"-0 Crushed	18+40 to 26+60	3	Station	15	Stations	8.2	123
Total Rock for Road Segment:								280

ROAD SEGMENT: B to L				Sta. to Sta.		TOTAL VOLUME (CY)
Application	Rock Size and Type	Location	Depth of Rock (inches)	0+00 to 10+90		
				Volume (CY) Per	Number of	
Spot Rock	3" – 0 Crushed	B to L	Varies	NA	NA	12
Total Rock for Road Segment:						12

EXHIBIT D
ROCK TABLE

ROAD SEGMENT: D to E				Sta. to Sta.				TOTAL VOLUME (CY)
Application	Rock Size and Type	Location	Depth of Rock (inches)	0+00 to 8+55				
				Volume (CY) Per		Number of		
Spot Rock	3" – 0 Crushed	D to E	Varies	NA		NA		60
Turnaround	3" – 0 Crushed	8+05	12	Turnaround	20	Turnarounds	1	20
Total Rock for Road Segment:								80

ROAD SEGMENT: F to G				Sta. to Sta.				TOTAL VOLUME (CY)
Application	Rock Size and Type	Location	Depth of Rock (inches)	0+00 to 11+75				
				Volume (CY) Per		Number of		
Spot Rock	3" – 0 Crushed	F to G	Varies	NA		NA		100
Turnout	3" – 0 Crushed	F to G	12	Turnout	29	Turnouts	2	58
Turnaround	3" – 0 Crushed	11+25	12	Turnaround	20	Turnarounds	1	20
Total Rock for Road Segment:								178

ROAD SEGMENT: J to K				Sta. to Sta.				TOTAL VOLUME (CY)
Application	Rock Size and Type	Location	Depth of Rock (inches)	0+00 to 4+90				
				Volume (CY) Per		Number of		
Spot Rock	3" – 0 Crushed	J to K	Varies	NA		NA		24
Turnaround	3" – 0 Crushed	4+40	12	Turnaround	20	Turnarounds	1	20
Total Rock for Road Segment:								44

ROAD SEGMENT: L to M				Sta. to Sta.				TOTAL VOLUME (CY)
Application	Rock Size and Type	Location	Depth of Rock (inches)	0+00 to 12+15				
				Volume (CY) Per		Number of		
Surfacing Rock	3" – 0 Crushed	L to M	12	Station	65	Stations	12.15	790
Junction	3" – 0 Crushed	3+35, 9+60 & 11+55	12	Junction	24	Junctions	3	72
Approach to Landing	3" – 0 Crushed	3+35, 9+60 & 11+55	12	Station	65	Stations	3.75	244
Landing	3" – 0 Crushed	3+35, 9+60, 11+55 & Point M	12	Landing	180	Landings	4	720
Total Rock for Road Segment:								1,826

EXHIBIT D
ROCK TABLE

ROAD SEGMENT: L to N				Sta. to Sta.				TOTAL VOLUME (CY)
Application	Rock Size and Type	Location	Depth of Rock (inches)	0+00 to 5+70				
				Volume (CY) Per		Number of		
Surfacing Rock	3" – 0 Crushed	L to N	12	Station	65	Stations	5.7	371
Landing	3" – 0 Crushed	Point N	12	Landing	180	Landings	1	180
Total Rock for Road Segment:								551

ROAD SEGMENT: O to P				Sta. to Sta.				TOTAL VOLUME (CY)
Application	Rock Size and Type	Location	Depth of Rock (inches)	0+00 to 6+50				
				Volume (CY) Per		Number of		
Base Rock	3" – 0 Crushed	O to P	6	Station	34	Stations	6.5	221
Surfacing Rock	1 ½" – 0 Crushed	O to P	6	Station	31	Stations	6.5	202
Junction Base	3" – 0 Crushed	Points O & P	6	Junction	14	Junctions	2	28
Junction Surfacing	1 ½" – 0 Crushed	Points O & P	6	Junction	12	Junctions	2	24
Total Rock for Road Segment:								475

TOTAL ROCK	24"-36" Large Riprap	24"-12" Riprap	3"-0 Crushed	1 ½"-0 Crushed
6,537 CY	8 EA	108 CY	3,097 CY	3,324 CY

Roads shall be uniformly graded, shaped and approved by STATE prior to rocking.

Total rock cubic yard volumes are rounded to the whole yard.

EXHIBIT D

ROCK ACCOUNTABILITY

PURCHASER shall obtain subgrade approval from STATE prior to rocking. Rocking shall be limited to periods when weather conditions are acceptable to STATE and when sediment will not enter streams. Additional surfacing needed because of construction season or construction practice is not included in the preceding ROAD SURFACING table and shall be furnished at PURCHASER expense.

Rock accountability shall be determined by the following methods, as directed by STATE. STATE shall be given 24 hours' notice prior to rocking.

Depth Measurement. Rock shall be spread and compacted according to the depths specified in Exhibit D. Truck measure volumes are given but shall not limit the amount of rock spread.

Depth shall be determined in the most compacted area of the surface cross section. The depth of compacted aggregates shall not vary more than 1 inch from the depth specified in the "Road Surfacing" table in Exhibit D. The average depth for each road segment shall be the specified depth or greater. If additional rock is required because of insufficient depth, the locations and volumes to be added shall be determined by STATE.

EXHIBIT D

COMPACTION AND PROCESSING REQUIREMENTS

Moisture Content: Compaction must take place when moisture content of the materials being compacted is favorable for effective compaction as determined by STATE.

Compaction Pass: A pass is defined as traveling a road section forward and then backward over that same section.

Subgrade. Subgrade surfaces of the road segments listed below shall be graded and compacted prior to rocking. Compaction shall be accomplished by traveling all surfaces from shoulder to shoulder until the surface is smooth and hard and visible deformation ceases. At least 3 passes shall be made over the entire width and length of the road. Compaction shall be accomplished by using one or more of the approved equipment options listed below:

Subgrade shall be crowned, outsloped, or insloped at 4 to 6 percent as specified in the "Forest Roads Specifications" table in Exhibit D.

ROAD SEGMENT	SUBGRADE COMPACTION OPTIONS
All road segments that require rock surfacing	Vibratory Roller

Fills. Embankments and fills shall be placed in (approximately) horizontal layers not more than 8 inches in depth. Each layer shall be separately, and thoroughly, compacted. Compaction equipment shall be operated over the entire width of each layer until visible deformation of the layers ceases. At least 3 passes shall be made over the entire width and length of each layer.

Placing individual rocks or boulders with more depth than the allowed layer thickness shall be permitted, provided the embankment will accommodate them. Such rocks and boulders shall be at least 6 inches below the subgrade. They shall be carefully distributed, and the voids filled with finer material, forming a dense and compacted mass. Compaction shall be accomplished by using one or more of the approved equipment options listed below:

ROAD SEGMENT	FILL COMPACTION OPTIONS
All road segments	Vibratory Roller, Vibratory Hand-Operated, Backhoe-Mounted Tamper, or Dozer

Crushed Rock. The rock shall be uniformly mixed and spread in layers on the approved roadbed. Each layer of crushed rock shall be moistened or dried to uniform moisture content suitable for maximum compaction and compacted in layers not to exceed 6 inches in depth. When more than 1 layer is required, each shall be shaped, compacted, and approved by STATE before the succeeding layer is placed. Any irregularities or depressions that develop during compaction of the top layer shall be corrected by loosening the material at these places and adding or removing material until the surface is smooth and uniform. Each layer shall be compacted with a minimum of 3 passes over the entire width and length of the road until the surface is smooth and hard and visible deformation ceases. Compaction shall be accomplished by using one or more of the approved equipment options listed below:

Rock shall be compacted and processed during the same project period it is spread, unless otherwise approved in writing by STATE.

Rock shall be crowned, outsloped, or insloped at 4 to 6 percent as specified in the "Forest Roads Specifications" table in Exhibit D.

ROAD SEGMENT	CRUSHED ROCK COMPACTION OPTIONS
All road segments requiring crushed rock	Vibratory Roller

EXHIBIT D

COMPACTION EQUIPMENT OPTIONS

Vibratory Rollers. The drum shall have a smooth surface, a diameter not less than 48 inches, a width not less than 58 inches, and a turning radius of 15 feet or less. Vibration frequency shall be regulated in steps to 1400, 1500, and 1600 VPM, corresponding to engine speeds of 1575, 1690, and 1800 RPM. The centrifugal force developed shall be 7 tons at 1600 VPM. It shall be activated by a power unit of not less than 25 horsepower. The vibratory roller shall be self-propelled and operated at speeds ranging from 0.9 miles to 1.8 miles per hour, as directed by STATE.

Vibratory Hand-Operated or Backhoe-Mounted Tamper. Vibratory hand-held or hydraulic tampers shall be used for compaction of backfill materials around culverts. The tamper shoe dimensions shall be a minimum of 10" X 13" and capable of a centrifugal force of 2,250 pounds.

Vibratory Grid Compactors. The roller shall have a grid surface and have an operating weight of 32,000 pounds or more. The rock shall be worked with a grader weighing at least 20,000 pounds during the grid rolling process. All rock shall come in contact with the vibratory grid compactor.

Dozer. A dozer/track-type tractor weighing a minimum of 45,000 pounds as directed by STATE shall be operated so that the entire surface comes in contact with the tracks.

EXHIBIT E

CULVERT SPECIFICATIONS

All culverts and drainage structures shall be installed as soon as possible and before October 31 annually.

All culvert materials shall be furnished and installed by PURCHASER, unless otherwise specified in the Contract.

Uninstalled culverts shall become property of the STATE. PURCHASER will deliver surplus culverts to the district office as directed by STATE.

Culverts 36 inches in diameter and smaller shall be constructed of corrugated polyethylene and shall be double-walled meeting the requirements of AASHTO M-294-11, Type S, or ASTM F2648.

Joining shall be done with bands of like material and corrugations. Manufacturers' instructions shall be followed for prefabricated pipe assembly. Polyethylene joints shall be made with split couplings, corrugated to engage the culvert corrugations, and shall engage a minimum of 4 corrugations, 2 on each side of the culvert joint.

The STATE Representative shall determine final culvert locations and stake the locations in the field prior to installation.

Culverts in live streams shall be installed with the inlet and outlet on grade with the stream bottom, unless otherwise specified in writing.

Cross Drain Culverts

Cross drain culverts on road grades in excess of 3 percent shall be skewed at least 30 degrees from perpendicular to the road centerline, except that cross drain culverts at the low point of dips in roads shall not be skewed. Cross drains shall be skewed to fit the required culvert length to the road prism.

Cross drain culverts shall be installed at a slope steeper than the incoming ditch grade, but not less than 3 percent or greater than 10 percent.

Disconnect Culverts

The culvert inlet shall be located as close to the channel that it is disconnecting, while the culvert outlet shall be located as far from the channel as possible; discharge culvert outflow on the forest floor, allowing for filtration before the water enters the disconnected channel.

The foundation and trench walls for all culverts shall be free from logs, stumps, limbs, stones, and other objects which would dent or damage the culvert. The culvert trench shall be excavated 3 culvert diameters wide to permit compaction and working on each side of the culvert. Tamping shall be done in 6-inch lifts, 1 culvert diameter each side of the culvert. Bedrock shall be excavated as required to provide a uniform foundation for the full length of the culvert.

A bedding of crushed rock, as specified, shall be placed to provide a wide band of support and to transmit the load from above evenly over the entire length of the culvert for all live stream culverts and all culverts on road improvement segments.

Backfill shall consist of crushed rock on improvement segments and job-excavated soil free of stumps, limbs, rocks, or other objects which would damage the culvert on new construction segments.

All surplus material generated by culverts installed within 35' of a Type-N or within 120' of a Type-F stream shall be end-hauled to a designated waste area.

EXHIBIT E

CULVERT SPECIFICATIONS

Minimum height of cover over top of culvert to subgrade when road is to be rocked shall be as follows: 12" for culverts 18" to 36". Minimum vertical cover for other designs shall be as specified by STATE.

Lengths of individual culvert sections shall be not less than 10 feet, unless otherwise provided for in special instructions. The shortest culvert section length shall be placed at the inlet end.

The ends of each culvert shall be free of logs and debris which would restrict the free flow of water.

The intake end of cross drain and disconnect culverts shall be provided with a sediment catching basin 3 feet in diameter at the bottom. The outlet end of any culvert which would allow water to erode embankment soil shall be provided with an energy dissipator, half round, or other approved slope protection device. Construct lead-off ditches away from culvert outlets where the slope gradients restrict the free flow of water.

Compaction by tamping utilizing a Vibratory Hand-Operated or Backhoe-Mounted Tamper is required for all stream crossing culverts and culverts on improvement sections.

All culverts scheduled for replacement shall become property of the PURCHASER and be removed from STATE land in the same project period in which replacement occurred. Damaged culvert inlets and/or outlets shall be repaired by opening them with a hydraulic jack, or cutting off the culvert end to allow for free passage of water at peak flow levels.

The intake ends of culverts in fills less than 3 feet to the top of the culvert shall be marked by driving steel posts within 6 inches of the downgrade side. Posts shall be painted with a rust-resistant paint and be a minimum of 5 feet long, with the spade driven 2 feet into the ground. Install a culvert marker at each existing culvert that is missing a marker that could be reached by a grader blade.

Energy Dissipators and Settling Ponds shall be installed within 72 hours of culvert installation, unless otherwise approved in writing by STATE.

A manufacturer's certification that the product was manufactured, tested, and supplied in accordance with this specification shall be furnished to STATE upon request.

EXHIBIT E

CULVERT LIST

CULVERT NO.	DIAMETER (Inches)	LENGTH (Feet)	ROAD SEGMENT POINT TO POINT	STATION
1	18	30	A to B	24+30
2	18	30	A to B	29+95
3	18	50	A to B	43+60
4	18	30	A to B	46+60
5	18	30	A to B	75+00
6	24	40	A to B	105+95
7	18	30	A to B	128+60
8	18	40	A to B	135+75
9	18	30	A to B	143+80
10	18	30	A to B	151+25
11	18	30	A to B	170+05
12	18	30	A to B	170+85
13	18	30	A to B	247+90

TOTAL LENGTHS BY DIAMETER	
18 INCH	24 INCH
390	40

EXHIBIT E

TYPICAL EMBEDDED ENERGY DISSIPATOR

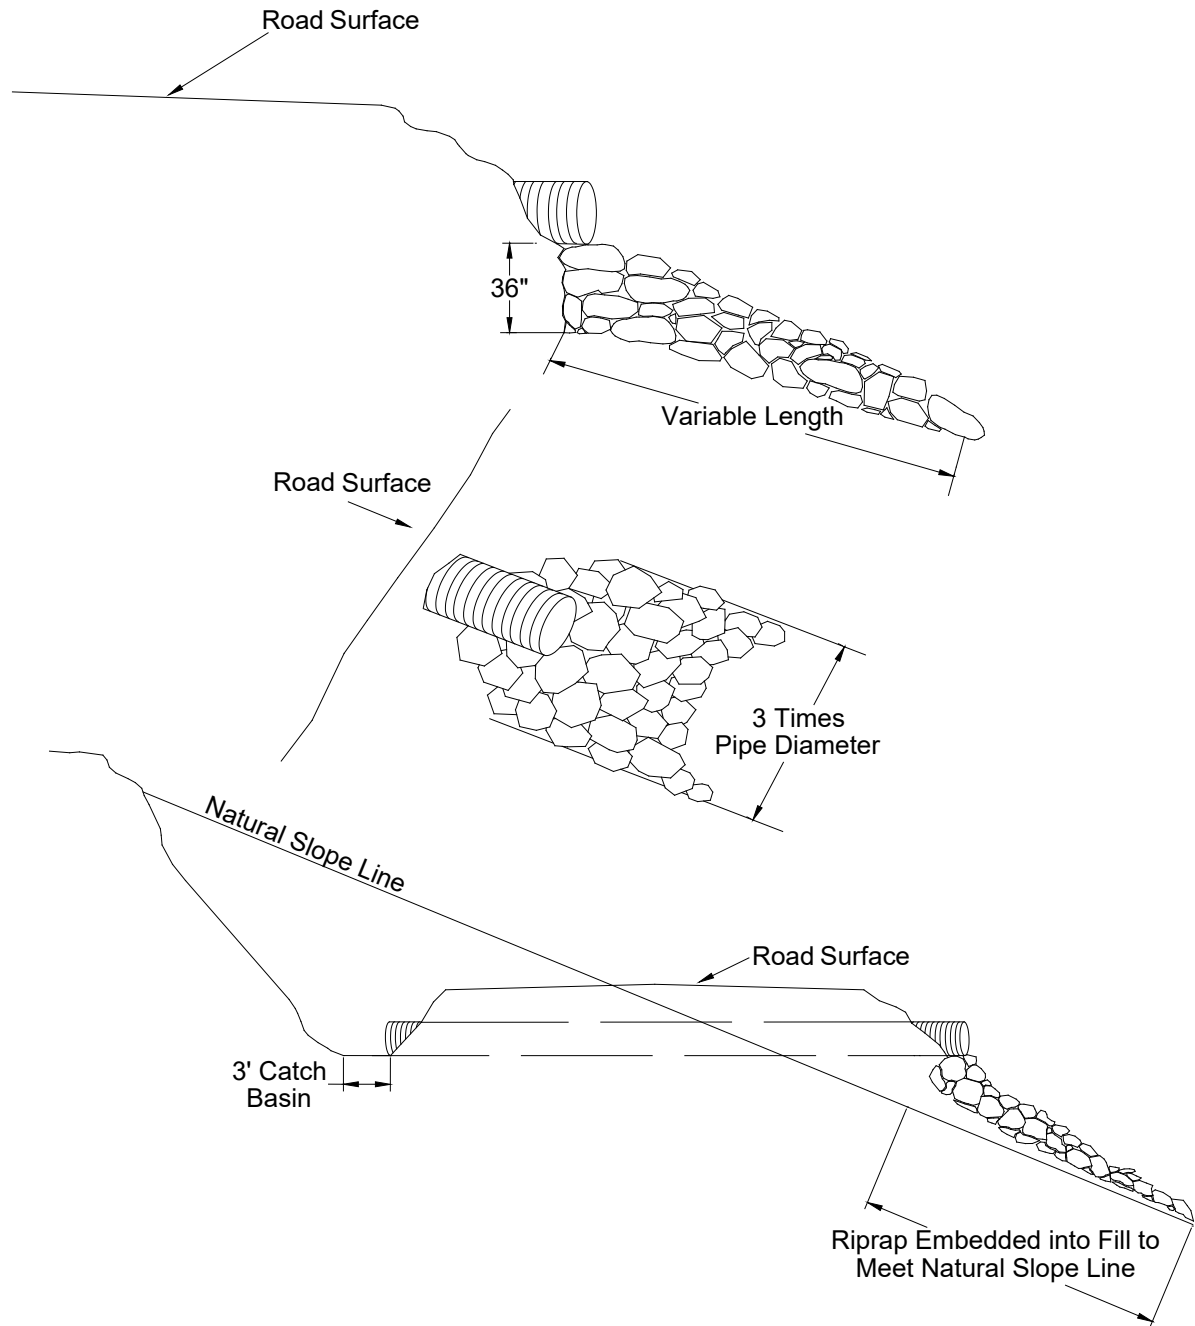


EXHIBIT F

ROAD BRUSHING SPECIFICATIONS

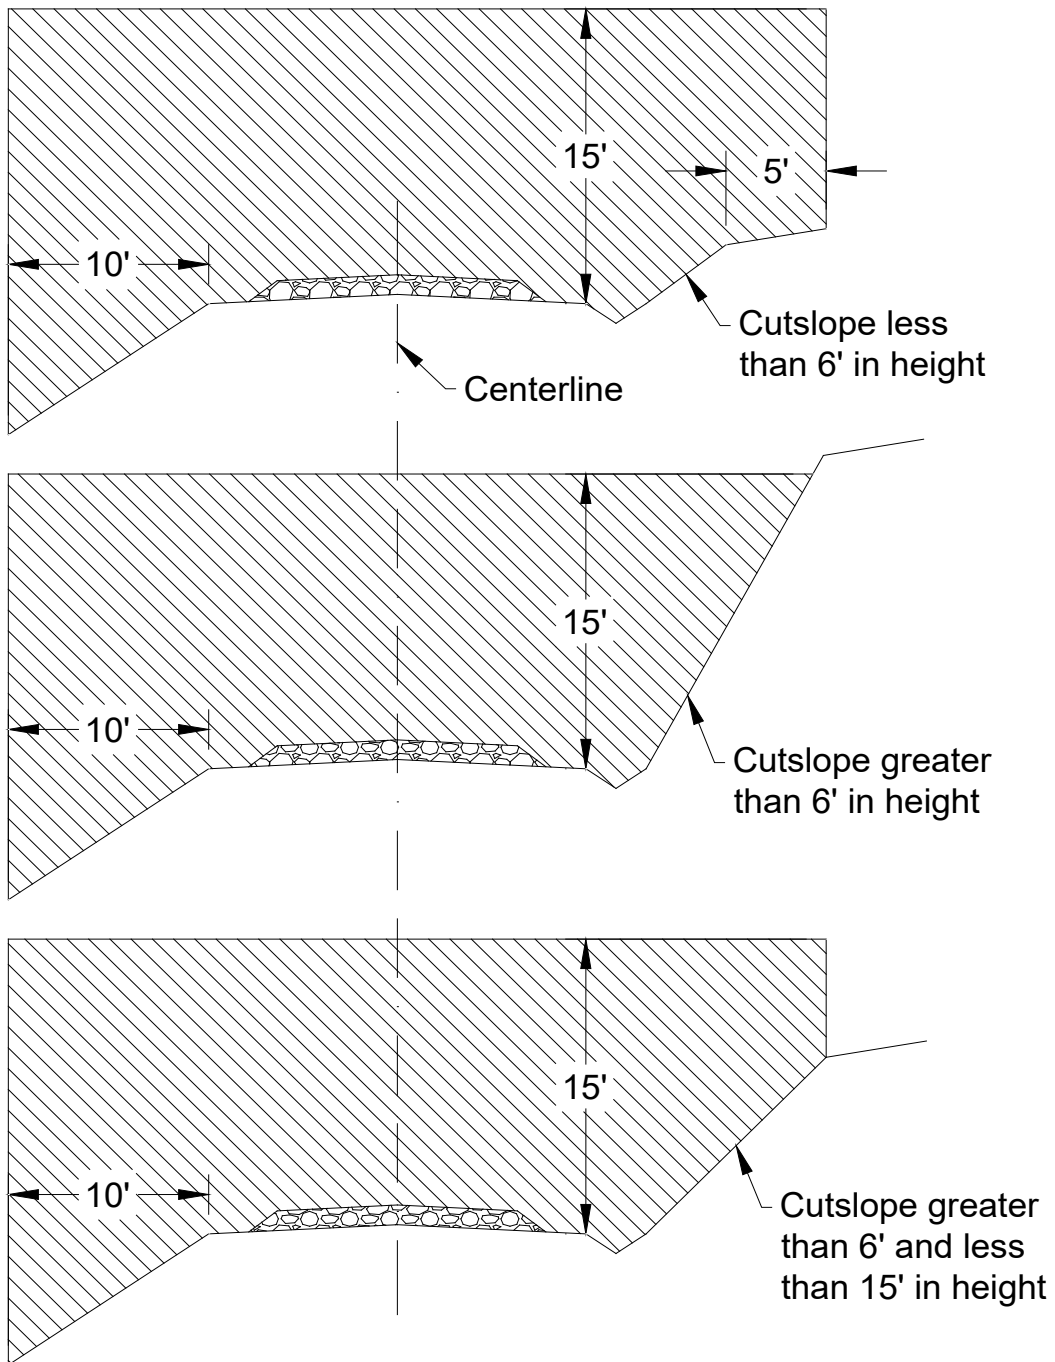


EXHIBIT F

ROAD BRUSHING SPECIFICATIONS

REQUIREMENTS

The minimum height of clearing shall be 15 feet from the road surface, and the minimum width of clearing on the down slope side of the road shall be 10 feet horizontal distance. The minimum width of brushing on the cut slope side of the road shall be dictated by the height of the cut slope as indicated in the three drawings above.

Brush and trees shall be cut to a maximum height of 6 inches above the ground surface or obstructions such as rocks or existing stumps.

Debris resulting from the brushing operation shall be removed from the roadway, cut slope, ditches, water courses, culvert inlets and outlets and sediment catching basins. Debris shall be mulched or scattered downslope from the road or placed in other stable locations. Large debris, 6 inches or larger in diameter, shall be mulched or cut into lengths 6 feet or less to facilitate rapid decay, unless otherwise approved by STATE.

Trees larger than 6 inches in diameter at stump height, located within clearing limits but outside of the ditch line or shoulder, shall not be cut down, but shall be limbed for road visibility. Planted or established conifers, located within brushing limits but outside of the ditch line or shoulder, shall not be cut down, but shall be limbed for road visibility unless otherwise directed by STATE.

Existing debris on the roadway, cut slope, ditch line, or catch basin shall be removed and treated. Debris shall be mulched or scattered downslope from the road or placed in other stable locations. Large non-merchantable debris, 6 inches or larger in diameter, shall be mulched or cut into lengths 6 feet or less to facilitate rapid decay, unless otherwise approved by STATE.

Merchantable blown down trees encountered shall be bucked in lengths as directed by STATE, and placed in locations acceptable to STATE, or pushed out of the road prism.

When spur roads to be brushed end with a Landing, the Landing is to be brushed as directed by STATE.

Brushing operations shall be completed before road improvement: road grading or surfacing of rock within the project area. If damages occur to the road surface outside of project area PURCHASER may be required to repair damages as directed by STATE.

DAMAGES


Culverts, Culvert Markers, Culvert Tags, Road Markers, Mile Markers, Point Signs, Timber Sale Boundary Tags, Project Point Signs, OHV Signs and Gates damaged, destroyed or displaced during brushing operations shall be repaired or replaced by PURCHASER or as directed by STATE.

EXHIBIT G

WATERBAR SPECIFICATIONS

PROFILE


DITCHED AND OUTSLOPED

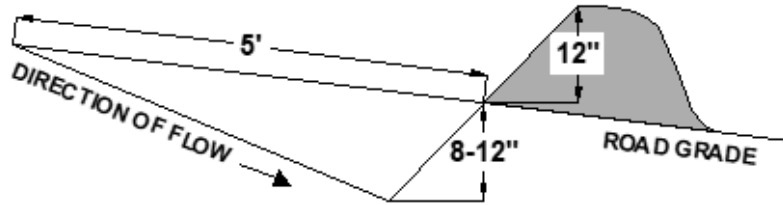


SPACING OF WATERBARS	
ROAD GRADE	DISTANCE
< 6 %	400'
6 - 10 %	200'
11 - 15 %	150'
> 15 %	100'

CROSS SECTION

DITCHED




OUTSLOPED



CONSTRUCT DITCHOUT THRU ANY EXISTING BERM.
CROSS DRAINAGE GRADIENT MINIMUM 3%.

PLAN VIEW

DITCHED

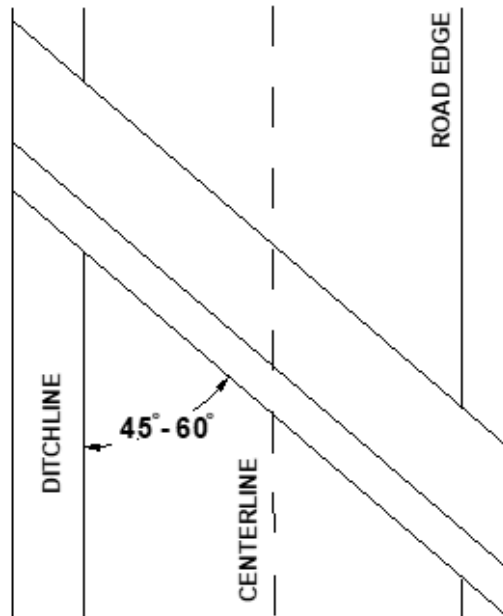

OUTSLOPED


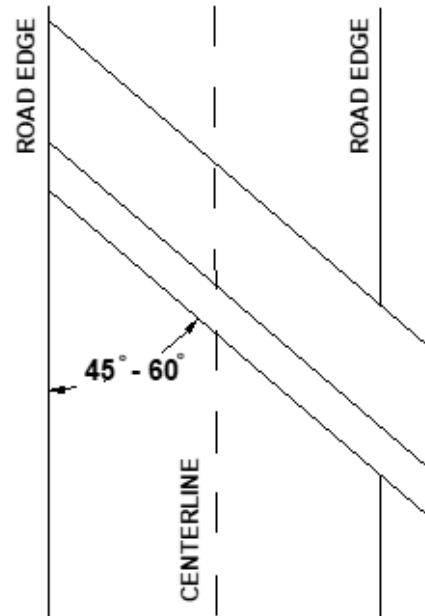


EXHIBIT G


TANK TRAP SPECIFICATIONS

PROFILE
DITCHED AND OUTSLOPED

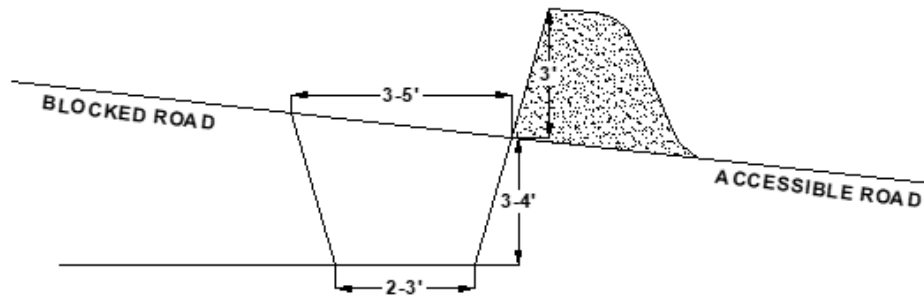


CROSS SECTION

DITCHED




OUTSLOPED




CONSTRUCT DITCHOUT THRU ANY EXISTING BERM.
CROSS DRAINAGE GRADIENT MINIMUM 3%

PLAN VIEW

DITCHED

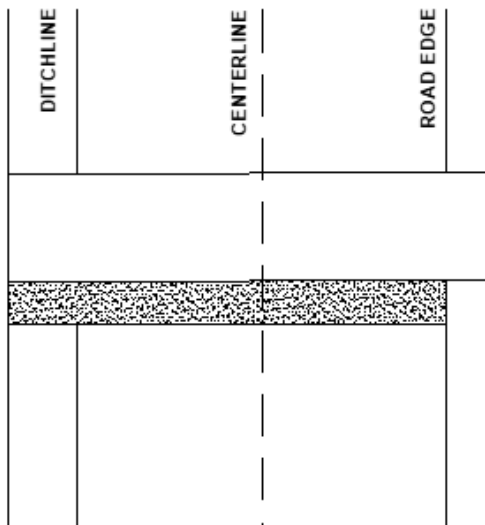

OUTSLOPED

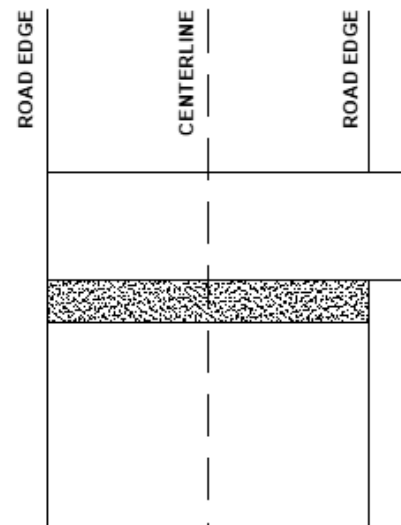

It should be sloped to drain with a relief ditch through the down slope edge of the road. The trench shall be behind the berm for approaching traffic.

EXHIBIT H

FOREST ROAD GATE DESIGN, CONSTRUCTION, AND INSTALLATION

CONTRACTOR shall construct, and install one HD Gate at station A to B 260+75, as shown on Exhibit A, according to the specifications in this Exhibit. Detailed gate plans may be provided by STATE.

GATE CONSTRUCTION AND SPECIFICATIONS

The gate shall be constructed to the design and with steel components meeting the specification and thicknesses within this exhibit, unless otherwise approved, in writing, by STATE.

Lock pin and lock shall be provided by STATE.

The Gate Arm, Arm Support and Arm Braces shall be constructed with 4" x 3" x 3/8" rectangular tubing.

The Arm Adjuster shall be constructed with 3" x 2" x 1/4" rectangular tubing.

The Hinge Post, lock Post, Lock Bell and Pin Bell shall be constructed from 8" Sch 80 B.I.P.

Hinge Rings and Lock Rings shall be constructed from 10" D.O.M seamless 1/2" thick.

Channel Iron shall be 4" x 2.50" x .500" 13.80 lbs. stock.

All Welded Caps shall be A-36 flat steel 1/4" thick.

Pin Bar shall be constructed from A-36 flat steel 4" x 1" stock.

Rebar shall be #4, 1/2" in diameter.

Two 1/2" drainage holes shall be drilled out from the bottom of the Gate Arm.

Two 1/2" drainage holes shall be drilled out from the bottom of the Arm Support and Six shall be drilled out of the top where the Arm Brace intersects.

All welds and cuts shall be completed prior to installation, except for the upper Lock Ring, Arm Adjuster and rebar.

Prior to painting, gate and posts shall be cleaned and free of oil, debris and rust scale.

Gate shall be painted with a rust resistant primer coat and a topcoat of a rust resistant paint, "Safety Yellow" in color.

All gate components shall be inspected and approved, in writing, by STATE prior to installation.

GATE INSTALLATION AND SPECIFICATIONS

The gate shall be installed according to the design within this exhibit.

Gate post location shall be marked on the ground and approved by STATE.

Excavated post holes shall be inspected and approved by STATE before the installation of the posts and placing of concrete.

Rebar shall be welded to the posts before the placement of concrete.

Gate shall have a clearance of at least 20' when opened.

Arm Adjuster shall be inserted into the Gate Arm, adjusted to length and welded completely around.

All field welds shall be inspected and approved by STATE.

After the curing of concrete, the gate shall be able to swing freely in both directions, open and latch with ease.

All bare metal, welds, scrapes, cuts or grind marks shall be cleaned and painted to the specifications stated above in this exhibit.

EXHIBIT H

FOREST ROAD GATE DESIGN, CONSTRUCTION, AND INSTALLATION

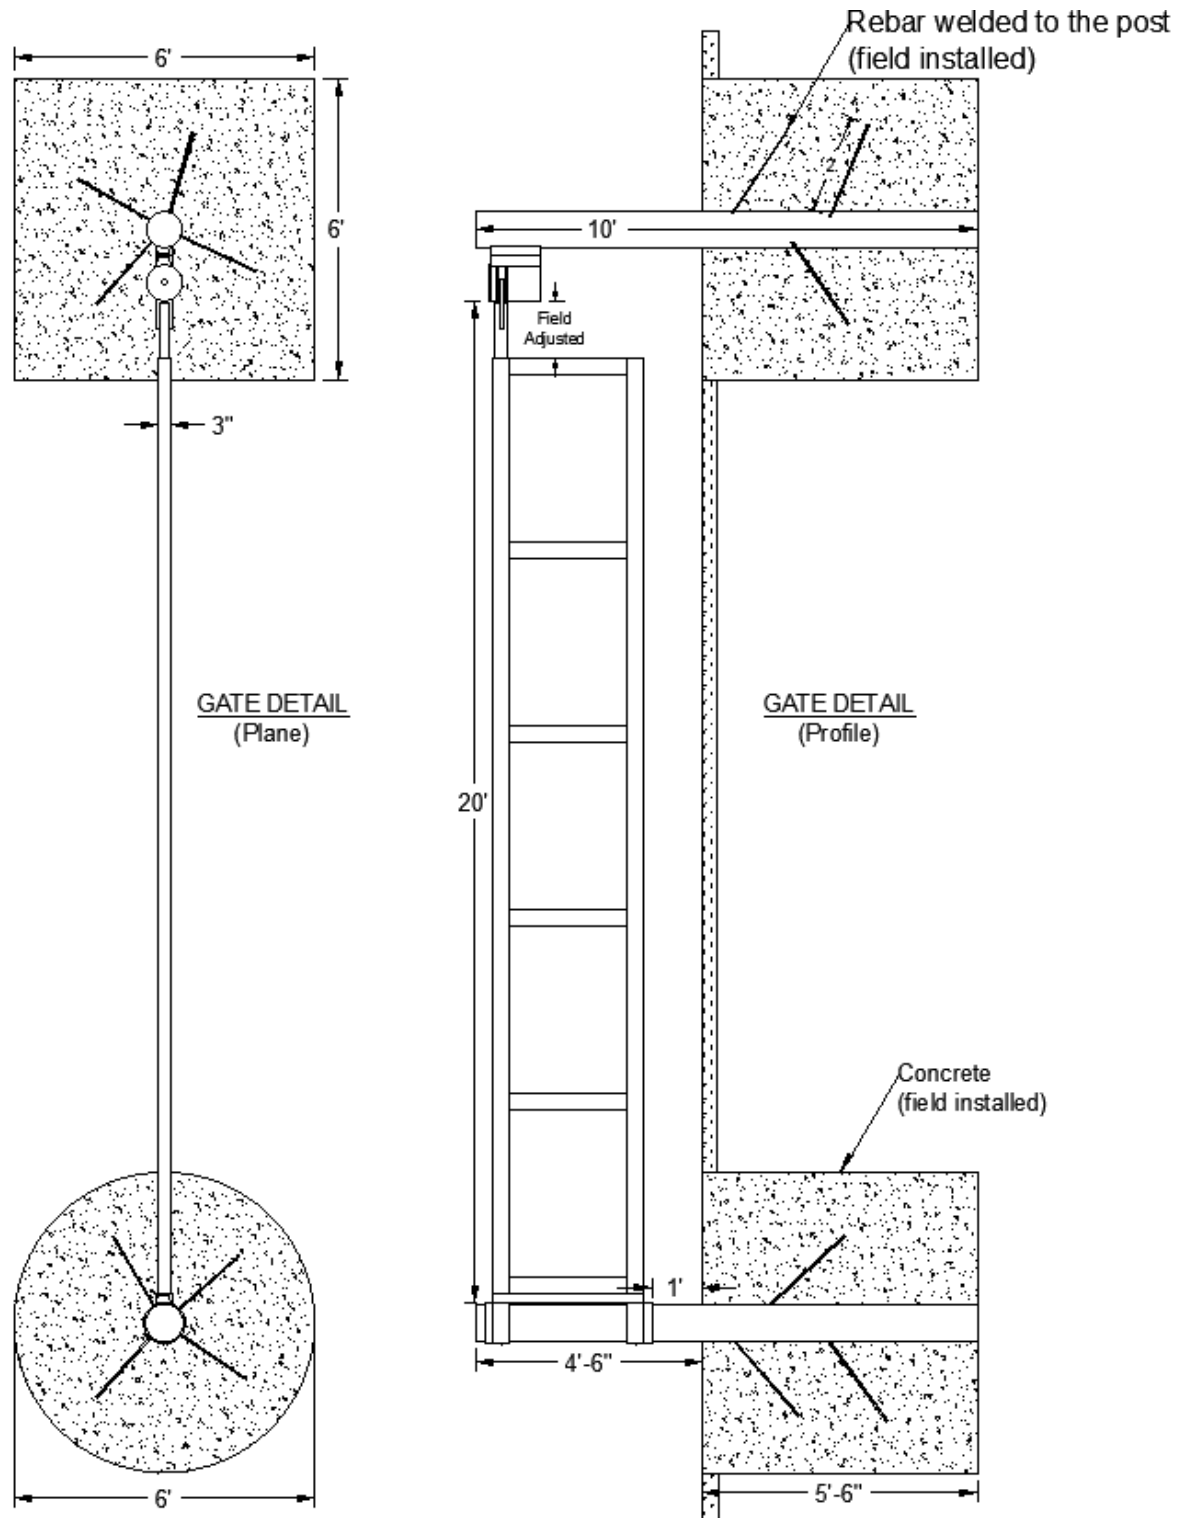


EXHIBIT H

FOREST ROAD GATE DESIGN, CONSTRUCTION, AND INSTALLATION

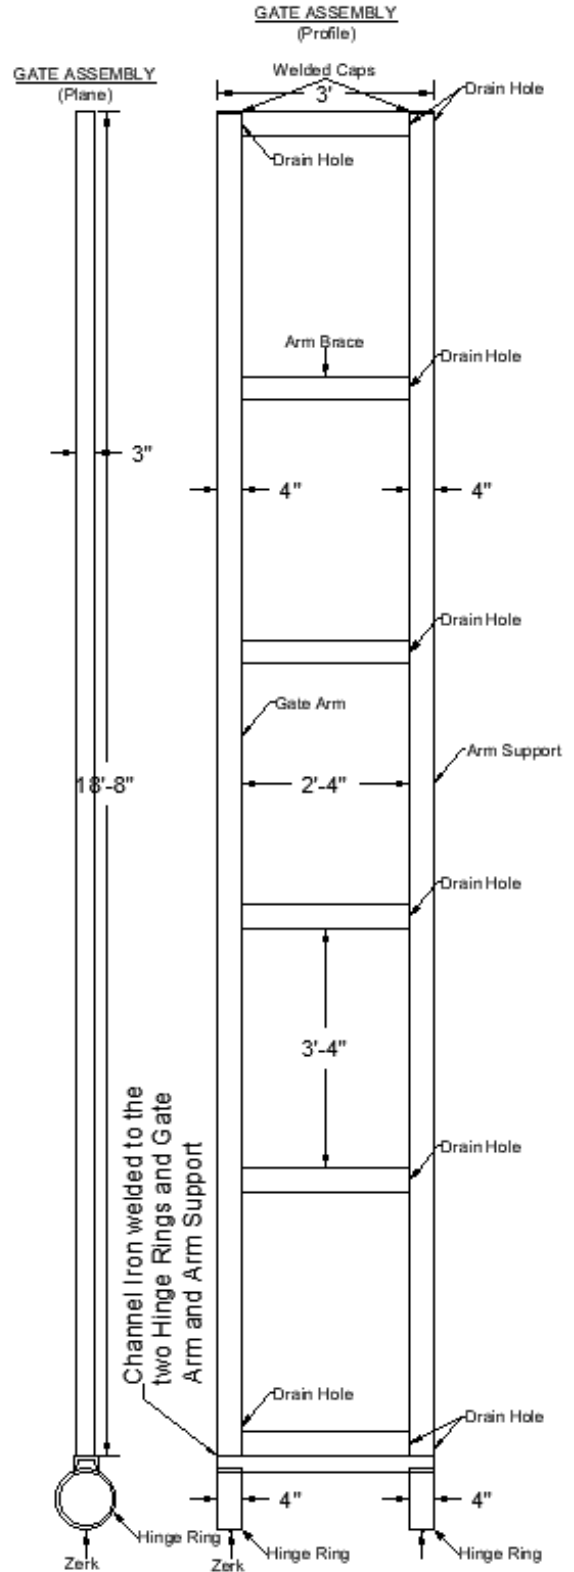
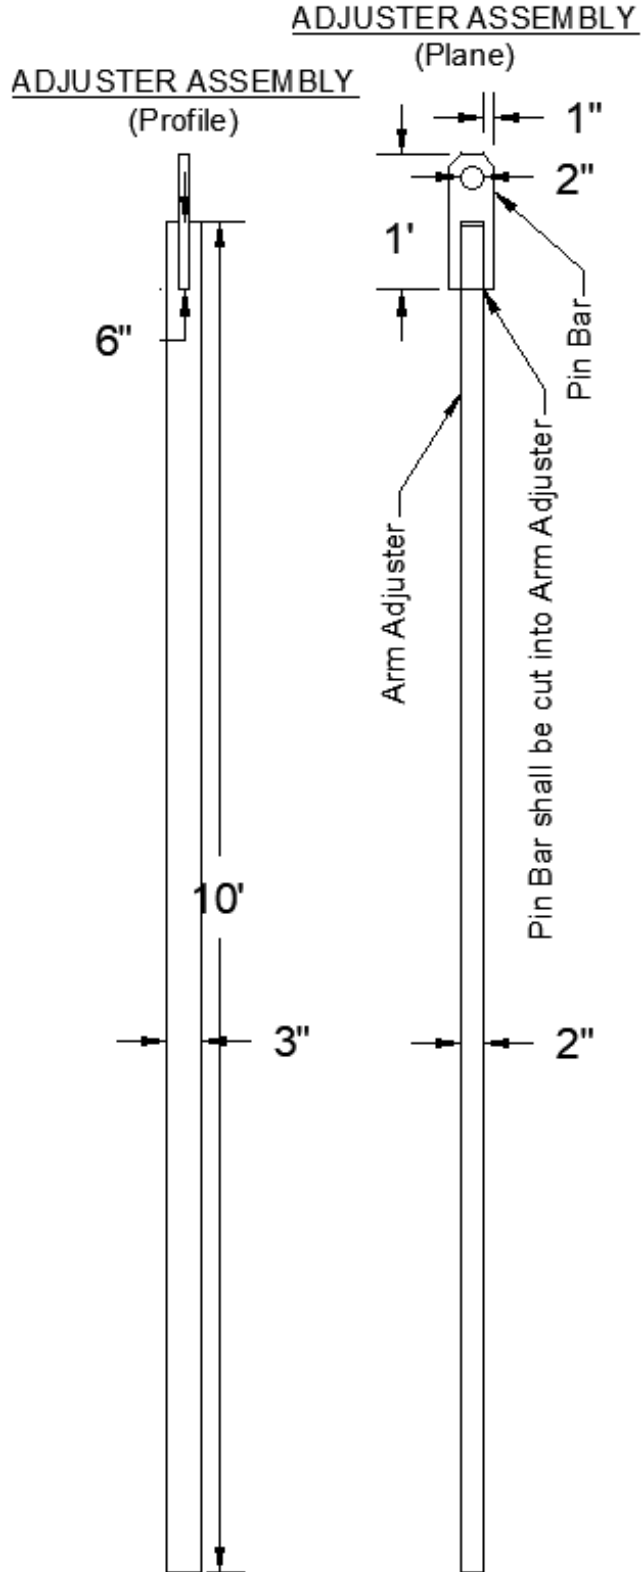


EXHIBIT H

FOREST ROAD GATE DESIGN, CONSTRUCTION, AND INSTALLATION

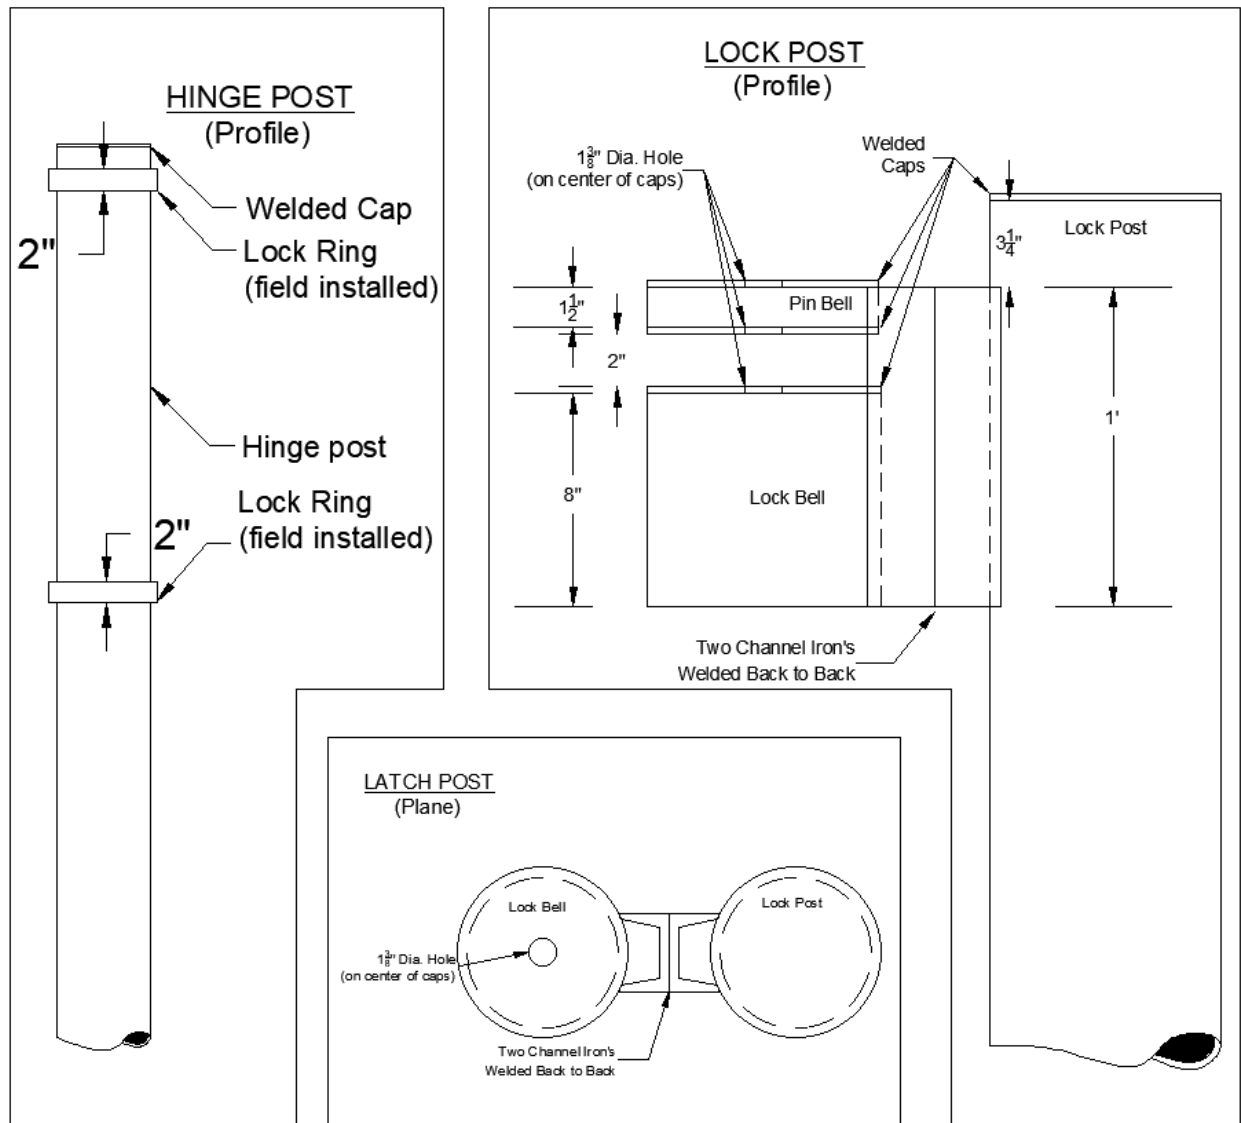


EXHIBIT I

SEEDING AND MULCHING

This work shall consist of preparing seedbeds and furnishing and placing required native seed, fertilizer, and straw mulch. Straw mulch shall consist of straw that is free of noxious weeds. Apply seed and fertilizer to all waste areas, and bare soils resulting from Project Nos. 1 & 2.

Seeding Seasons. Seeding shall be performed only from March 1 through June 15 and August 15 through October 31. Seeding materials shall not be applied during windy weather or when the ground is excessively wet or frozen. Areas of disturbed soil shall be seeded by the end of the project period in which work was started. PURCHASER shall notify STATE within 24 hours of seeding and fertilizer application.

APPLICATION METHODS FOR SEED AND FERTILIZER

Dry Method. Mechanical seeders, seed drills, landscape seeders, cultipacker seeders, fertilizer spreaders, or other approved mechanical seeding equipment shall be used to apply the seed and fertilizer in the amounts and mixtures specified. Hand-operated seeding devices may be used when seed and fertilizer are applied in dry form.

APPLICATION RATES FOR SEED AND FERTILIZER

Native Grass Seed. Listed grass seed below shall be applied at specific broadcast rates that coincide with grass seed selected by purchaser in accordance with the table below. The seed mixture shall be approved by STATE or comprised of at least three of the following and sufficiently mixed before application:

Native Grass Species	lbs	Coverage Ft²	Broadcast Rate lbs/acre
Barley Meadow	1	1740	50-62.5
Bentgrass Spike	1	43560	2-2.5
Bluegrass Pine	1	21780	2-2.5
Brome Alaska	1	1980	2-2.5
Brome California	1	1740	50-62.5
Brome Columbia	1	1980	44-55
Fescue Native Red	1	2200	20-25
Fescue Roemers	1	3630	24-30
Fescue sand	1	3110	28-35
Fescue Western	1	2900	15
Hairgrass Slender	1	7260	12-15
Hairgrass Tufted	1	10890	8-10
Junegrass Prairie	1	43560	2-2.5
Lemmons Needlegrass	1	2900	30-37.5
Oatgrass California	1	1240	70-87.5
Sloughgrass American	1	4355	20-25
Wheatgrass Slender	1	2180	20
Wildrye Blue	1	2175	40-50

Fertilizer: Chemical analysis shall be 16-20-0 and shall be applied at the rate of 200 pounds per acre. Fertilizer shall not be applied within 100 feet of streams.

EXHIBIT J

SPECIFICATIONS FOR BRUSH AND SLASH SHOVEL PILING

Description of Work to be Done

Areas designated for work under the contract shall be treated according to the specifications given below:

Clearing - brush, logging Slash, and other debris shall be cleared from planting sites and piled in windrows or piles, so that 80 percent or more of the soil organic layer is exposed. All woody vegetation other than trees is defined as brush in this exhibit. Stumps, however, shall be placed separately, in small clumps for wildlife.

In-Unit Piles - shall be located at least 75 feet apart and shall be no more than 75 feet long. Piles shall be located inside the sale area designated for piling and shall be more than 50 feet from any cutting edge, standing tree, or existing road. Logs that do not meet Section 2045 Log Removal requirements, chunks larger than 12 inches diameter, and stumps shall be left scattered in the Unit for wildlife habitat away from roads and landings.

Pile Construction - all landing piles, and in-unit piles greater than 9 feet by 9 feet by 9 feet, shall have no smaller than a 200 square feet of polyethylene plastic sheeting or enough to cover 50% of the pile. Start the pile with good burnable material such as conifer limbs and chunks, 6 to 8 feet high, add plastic, and complete the pile with Slash on the plastic. Debris that contains a log segment at least 3 inches in diameter at the small end and at least 10 feet in length shall be decked separately from smaller debris and hauled as Pulp.

Protective Measures - shall comply with Oregon Forest Practice Rules issued per ORS 527.610 to 527.992. Examples of protective measures are: (1) waterbarring tractor trails where necessary to prevent runoff toward streams; (2) not windrowing in streams or streamways; and (3) leaving Stream Buffers along designated streams.

Work specifications may be modified or waived only upon written notice from STATE.

EXHIBIT J

SPECIFICATIONS FOR BRUSH AND SLASH SHOVEL PILING

Equipment Type, Equipment Operation, and Conduct of Work

The specifications given below are requirements for equipment type, equipment operation, and conduct of work under the contract.

Shovel - shall be a track-mounted machine with a ground-pressure rating of not more than 6.8 PSI and a net horsepower of 85 or more. The machine shall be capable of a minimum horizontal reach of 26 feet and a minimum vertical reach of 16 feet.

- Log Loader – shovel: Grapple with rake attachment shall be a hydraulically controlled, with a 360-degree continuous rotation, and tooth length on rake arm shall be greater than 14 inches long, unless otherwise approved in writing by STATE.

Equipment	Rate	Acres	Appraised Value
Log Loader	\$250 / acre	10	\$2,500

Operator - must be experienced in operating similar equipment on land clearing operations, be able to operate the equipment proficiently, and pile the debris on the area as directed by STATE.

Support - including transport, other equipment, replacements, supplies, maintenance, and repairs shall be furnished as required to complete work; and shall be furnished without cost to STATE, other than as agreed under the contract terms.

Work Scheduling - work shall be accomplished only during dry weather conditions, and started within 14 calendar days after completion of yarding activities on the Timber Sale Area. Operations shall provide for continual operation until contract work is completed, unless interrupted by poor weather, fire closures, or other uncontrollable circumstances. Equipment breakdowns shall be repaired without undue delay, and provision shall be made for replacement of equipment to prevent prolonged delays. Piling operation shall not be allowed when operations might damage sites or affect stream flows. Any exception to these instructions must be authorized in writing by STATE.

STATE Representative - shall provide directions for the conduct of work according to specifications.