



Oregon Department of Forestry
 2600 State St Salem OR 97310
 PART III: EXHIBITS

EXHIBIT B
TIMBER SALE OPERATIONS PLAN
 (See page 2 for instructions)

Date Received by State: _____

(5) State Brand Information (Complete)

(1) Contract Number: FG-341-2026-W01237-01

(2) Sale Name: Steppinout

(3) Contract Expiration Date: 10/31/2028

(4) Purchaser Name: _____

(6) State Representatives:

<u>Name</u>	<u>Circle One</u>	<u>Phone No.</u>	<u>Cell No.</u>	<u>Alt Phone</u>
	Logging Projects All			
	Logging Projects All			
	Logging Projects All			
	Logging Projects All			

(7) Purchaser Representatives:

<u>Name</u>	<u>Circle One</u>	<u>Phone No.</u>	<u>Cell No.</u>	<u>Alt Phone</u>
	Logging Projects All			
	Logging Projects All			
	Logging Projects All			
	Logging Projects All			
	Logging Projects All			
	Logging Projects All			
	Logging Projects All			

(8) Name of Subcontractors and Start Dates:

<u>Project No.</u>	<u>Subcontractor Name.</u>	<u>Start Date</u>	<u>Completion Date</u>	<u>Cell No.</u>	<u>Alt Phone</u>

	<u>Subcontractor Name.</u>	<u>Start Date</u>	<u>Cell No.</u>	<u>Alt Phone</u>
FELLING				
YARDING				

(9) Comments:

(10) Operations Map: Attach a copy of timber sale Exhibit A or other suitable map which plainly shows the items listed on the instruction sheet.



Oregon Department of Forestry

2600 State St Salem OR 97310

PART III: EXHIBITS

EXHIBIT B


INSTRUCTION SHEET FOR OPERATIONS PLAN

SUBMIT ONE COPY OF PLAN TO STATE

Operations shall be limited to the work shown in the plan until a revised plan or supplemental plan is submitted covering additional work. Compliance with this plan is not in lieu of compliance with any federal requirements related to the federal Endangered Species Act including without limitation PURCHASER'S independent obligation to avoid take of a T&E species and PURCHASER'S obligation to comply with terms and conditions of any incidental take Permit(s) that include required minimization and mitigation measures in any applicable Habitat Conservation Plan. If STATE has prepared a required Forest Practices Act (FPA) "Written Plan" for operations, PURCHASER shall comply with all provisions of the Written Plan.

Explanation of Item No.(from Page 1)

- (5) All sales require you to use a brand furnished by STATE. If the State brand has not been assigned when the plan is submitted, it will be furnished and assigned later. Complete drawing. If more than one brand is assigned to the sale, complete both drawings.
- (6) The contract requires you to have a designated representative available on the sale area or work location who is authorized to receive in your behalf any notice or instruction given by STATE and to take action in regard to performance under the contract. If logging and project work is widely separated, a representative is required for each.
- (7) The STATE representative will be designated when your plan is approved and is the person who will inspect and issue instructions regarding performance.
- (8) Show names of subcontractors to be used for any or all phases of the operations. If subcontractors are not Known, or are changed later, give notification to the STATE representative prior to commencement of work by subcontractor.
- (9) Show projected dates for commencement of both projects and logging. If projected dates need to be changed at a later date, notification must be given to the STATE representative by supplemental plan or otherwise, prior to commencement of such operations.
- (10) The STATE representative will furnish extra copies of Exhibit A of the contract for your use in preparing the operations map. The map shall use the following legend and show:
 1. Landing locations, approximate setting boundaries, and probable sequence of logging the settings. Number the settings in sequence.
 2. Locations of spur roads planned for construction, other than required by the timber sale contract. Provide spur road specifications
 3. Locations of proposed tractor yarding roads. Show if and how marked on the ground.
 4. Locations of temporary stream crossings.
 5. List the sequence of performing project work.
 6. Location of rock sources - attach pit development plans.

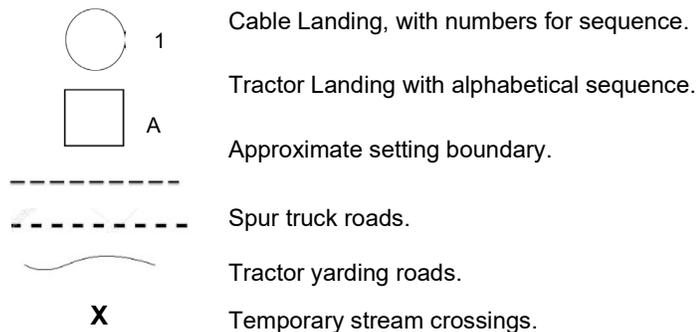




Oregon Department of Forestry
 2600 State St Salem OR 97310
 PART III: EXHIBITS
EXHIBIT B
OPERATIONS PLAN


Completion Timeline

Indicate on the appropriate timeline below, the dates by which you plan to complete the work as required under this contract. The purpose of this section is to develop a plan that will ensure you complete the work as required, and meet the interim completion date(s) and contract expiration date. This plan is incorporated and made a part of the contract. When, in the opinion of STATE, operations are not commencing in a manner that meets the intent of this plan, you may be placed in violation of contract and your operations suspended until an amended plan is submitted and approved by STATE.

Projects

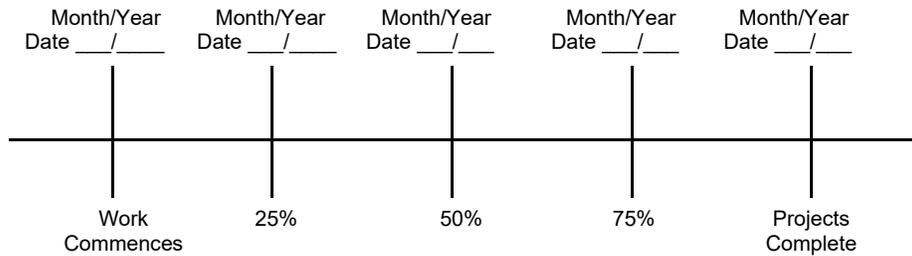

Harvest & Other Requirements

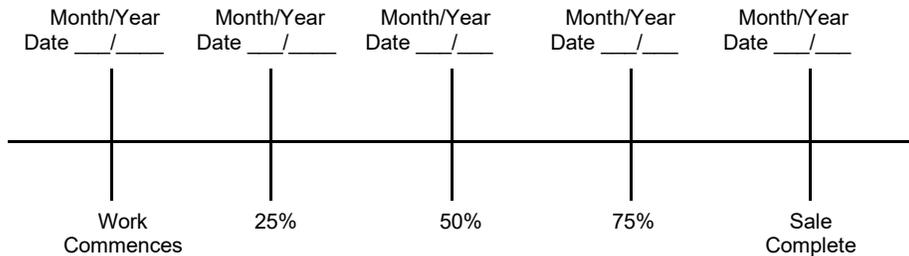

The Federal Endangered Species Act (ESA) prohibits a person from taking any federally listed threatened or endangered species. Taking under the federal ESA may include alteration of habitat. STATE's approval of this plan does not certify that PURCHASER's operation under the plan is lawful under the federal ESA or that the plan is consistent with the terms and conditions of any applicable incidental take Permit(s) including any required minimization and mitigation measures proposed in the applicable Habitat Conservation Plan. As provided in the timber sale contract, PURCHASER's must comply with all applicable state, federal, and local laws, including without limitation any Permit(s) issued thereunder.

PURCHASER's compliance with this plan is not in lieu of compliance with any federal requirements related to the federal Endangered Species Act.

APPROVED; Date: _____

SUBMITTED BY:
PURCHASER

STATE OF OREGON - DEPARTMENT OF
FORESTRY

Title _____

Title _____



Oregon Department of Forestry
EXHIBIT C - SAWMILL GRADE (WESTSIDE SCALE)
SCALING INSTRUCTIONS - LOCATION APPROVAL - BRAND INFORMATION
 Forest Grove - NWOA

(1) ORIGINAL REGISTRATION Date _____
 REVISION NUMBER 000 Date _____
 CANCELLATION Date _____

(2) TO: _____
 (Third Party Scaling Organization)

(3) FROM: Forest Grove Phone (503) 357-2191
 (State Forestry District)
 Address: 801 GALES CRK RD
FOREST GROVE, OR 97116-1199

(4) PURCHASER: _____
 Mailing Address: _____

 Phone Number: _____

(5) MINIMUM SCALING SPECIFICATIONS	
SPECIES	MINIMUM NET VOLUME
Conifers	10
Hardwoods	10

*Apply minimum volume test to whole logs over 40' Westside

(6) WESTSIDE SCALE: _____
 Use Region 6 actual taper rule. Logs over 40'.

(7) Weight Scale Sample YES NO


(8) APPROVED SCALING LOCATIONS <small>(as shown on the ODF Approved Locations web-site)</small>	Species	Yard	Truck	Weight

(9) SALE NAME: Steppinout
 COUNTY: Washington

(10) STATE CONTRACT NUMBER:
FG-341-2026-W01237-01

(11) STATE BRAND REGISTRATION NUMBER:

(12) STATE BRAND INFORMATION:



(13) PAINT REQUIRED: YES
 COLOR: Orange

(14) SPECIAL REQUESTS (Check applicable)	
PEELABLE CULL (all species).....	<input checked="" type="checkbox"/>
NO DEDUCTIONS ALLOWED FOR MECHANICAL DAMAGE	<input checked="" type="checkbox"/>
ADD-BACK VOLUME - Deductions due to delay...	<input checked="" type="checkbox"/>
OTHER :	

(15) REMARKS:
 "Mule Trains"
 1. Loads are required to have load tickets for each set of bunks.
 2. If truck and pup are to be weighed, weigh and process separately for gross and tare weights.

Operator's Name (Optional inclusion by District): _____

(16) SIGNATURES:

 Purchaser or Authorized Representative Date

 State Forester Representative Date

 State Forester Representative PRINT NAME

Notify the District within one hour when branding or painting is inadequate for quick identification, the receipts are missing, not correctly or completely filled out, and/or when logs presented for scaling are impossible to scale accurately.
 General Distribution: TPSO, Approved Scaling Locations and Purchaser.



Oregon Department of Forestry
EXHIBIT C - SAWMILL GRADE
INSTRUCTIONS FOR EXHIBIT C
Forest Grove - NWOA

(1) Check appropriate box. REVISION NUMBER requires comments. CANCELLATION requires logging and hauling to be complete, recall branding hammers.

(2) Designate Third Party Scaling Organization (TPSO).

Columbia River Log Scaling & Grading Bureau
P.O.Box 7002, Eugene, OR 97401
Phone: (541) 342-6007 Fax: (541) 342-2631
Email: services@crls.com

Pacific Rim Log Scaling Bureau, Inc.
8288 28th Court North East, Lacey, WA 98516
Phone: (360) 528-8710 Fax: (360) 528-8718
Email: office@prlsb.com

Mountain Western Log Scaling & Grading Bureau
2560 NW Medical Park Drive, OR 97471
Phone: (541) 673-5571 Fax: (541) 672-6381
Email: info@mountainwestern.com

Yamhill Log Scaling & Grading Bureau
P.O.Box 709, Forest Grove, OR 97116
Phone: (503) 359-4474 Fax: (503) 359-4476
Email: yamhilllog@frontier.com

Northwest Log Scalers Inc.
6137 NE 63rd St, Vancouver, WA, 98661
Phone: (360) 553-7212 ext. 4 Fax:(360) 553-7213
Email: info@nwlogscalers.com

(3) State District office, address and phone.

(4) Enter Purchaser's business name, address, and phone number as it appears on the Contract.

(5) Minimum Scaling Specifications.

(6) Westside - Region 6 actual taper segment scale. Check Yes or No. Special Service Rules on file with TPSO. See: Segment Scaling and Grading of Long Logs - All Species - State Forestry Department Scaling Practices (Westside).

(7) Weight Scale Sample - Check box if sale is to be a Weight Scale Sample. All specifics for handling, scaling and processing will be attached or explained in the Remarks section item (15).

(8) Show scaling locations only applicable to TPSO. Location name should appear as it does on the ODF Approved Scaling Location web site: https://apps.odf.oregon.gov/Divisions/management/asset_management/scalinglocation.asp Locations with scaling and processing directions specific to their location should be on a separate form. Species should be identified if not capable of receiving "all" species. Check appropriate box for either: yard, truck scale, or weight. Refer to the web site listed above for the locations approval status.

(9) Enter sale name and county.

(10) Enter sale Contract number.

(11) Enter Oregon's State Brand Registry Number (**REQUIRED**).

(12) Show brand assigned to timber sale. One brand only. If more than one brand is assigned to the sale: (1) make a separate form for each brand and (2) on each form, explain and show other brand(s) in the Remarks section item (15).

(13) Check yes for Paint Required and designate "Orange" for color. Non required removal volumes may sometimes require blue paint.

(14) Special Requests. These are requests that will be applied to ODF timber sales. All boxes applicable to the timber sales designated in the Exhibit C form must be "marked". If "Other" is indicated, it must contain a description and any necessary comments.

(15) Use this space to designate any weight scale sample instructions or any other explanations to clarify scaling, processing and/or mailing requirements. If additional scaling locations are approved, revise original or current form showing all (old and new) locations. Check REVISION box at top of form and explain under remarks. Route as indicated.

(16) Require purchaser to sign and date completed form in addition to State Forester Representative, sign and print name on the form. Signatures not required on revisions.

EXHIBIT D

FOREST ROAD SPECIFICATIONS

SUBGRADE WIDTH	SURFACED WIDTH	POINT TO POINT	STATION TO STATION	DRAINAGE
Match Existing	Match Existing	A to B	0+00 to 28+60	Ditch
14 feet	---	C to D	0+00 to 21+65	Ditch
14 feet	---	E to F	0+00 to 28+30	Ditch
Match Existing	Match Existing	G to H	0+00 to 166+40	Ditch
14 feet	---	H to I	0+00 to 1+50	Ditch
14 feet	---	H to J	0+00 to 1+25	Ditch

CLEARING. This work shall consist of clearing, removing, and disposing of all trees, Snags, Down Timber, brush, surface objects, and protruding obstructions within the clearing limits. All danger trees, leaners, and Snags outside the clearing limits which could fall and hit the road shall be felled.

CLEARING CLASSIFICATION.

New Construction - Where clearing limits have not been marked, the clearing limits shall extend 5 feet back of the top of the cutslope and 5 feet out from the toe of the fill slope, or as directed by STATE.

Improvement - the "Road Brushing Specifications" in Exhibit F shall apply. Where clearing limits have not been marked, the clearing limits shall extend 5 feet back of the top of the cutslope and 10 feet out from the toe of the fill slope, or as directed by STATE.

GRUBBING. This work shall consist of the removal or digging out of stumps and protruding objects. All stumps shall be completely removed within the limits of required grubbing. Stumps overhanging cutslopes shall be removed.

GRUBBING CLASSIFICATION.

New construction - from the top of the cutslope to the toe of the fill.

Improvements and reconstructions - 4 feet back from the shoulder of the subgrade or ditch, whichever is widest, or as marked in the field.

CLEARING AND GRUBBING DISPOSAL. Clearing and grubbing debris shall not be placed or permitted to remain in or under any road embankment sections. Clearing and grubbing debris shall be left in a stable location, and not left lodged against standing trees. Clearing and grubbing debris may be scattered through openings in the timber outside of the cleared right-of-way, except for the following areas where debris shall be fully contained and hauled to a designated waste area:

- Where end-haul is required
- On side slopes exceeding 55 percent
- On unstable areas
- In any stream channel or where material may enter the stream channel.

Clearing, grubbing, and associated disposal shall be completed prior to subgrade approval.

EXHIBIT D

FOREST ROAD SPECIFICATIONS

EXCAVATION. Excavation and grading shall not be done when weather and/or ground conditions are such that damage will result to existing subgrade or cause excessive erosion.

Excavation shall conform to STATE-specified lines, grades, dimensions, and plans when provided.

Excavated materials shall not be placed within an RCA.

Unless road plans show otherwise, all roads shall be on a balanced cross section, except when the slope is over 50 percent, the road shall be on full bench for the width specified.

Suitable excavated material shall be used for the formation of fills, shoulders, and drainage structure backfills. Embankment materials shall be free of woody debris, brush, muck, sod, frozen material, and other deleterious materials.

Sidecast includes any road generated excess excavation material which is not essential as part of the road prism, is not compacted, and is below the roadway. Sidecast shall not be placed where it will enter a stream course. Leaving sidecast below the road is only permissible if specifically allowed in "Full Bench and End Haul Requirements" in this Exhibit.

ROAD WIDTH LIMITATIONS. PURCHASER shall obtain advance written approval from STATE to construct the road to a greater width than specified. Extra subgrade width shall be required for:

Fill Widening. Add to each fill shoulder 1 foot for fills 3 feet to 6 feet high; 2 feet for fills over 6 feet high.

Curve Widening. Widen the inside shoulder of all curves as specified in the plans or as follows: 400 divided by the radius of the curve equals the amount of extra width.

DRAINAGE. Drainage features shall be in place as soon as possible during construction and prior to October 31 annually. Drainage features shall include:

Subgrade. Subgrade shall be crowned, outsloped, or insloped at 4 to 6 percent as shown on the "Forest Road Specifications" table in this Exhibit.

Ditch. Construct "V" shaped ditch 3 feet wide and to a depth of 1 foot below subgrade.

Ditchouts. Construct ditchouts to drain away from subgrade at locations marked in the field or as directed by STATE.

TURNOUTS. Increase roadbed width an additional 8 feet for both subgrade and surfacing. Length shall be at least 25 feet, plus 25-foot approaches at each end. Location: Intervisible but not greater than 750 feet apart.

SLOPES. Top of cutslope shall be rounded.

	<u>Cutslopes</u>	<u>Fill Slopes</u>
Solid Rock	Vertical to ¼ :1	
Fractured Rock	¼:1	
Soil - side slopes 50% and over	½:1	1½:1
Soil - side slopes less than 50%	¾:1	1½:1

LANDINGS. Landings shall be constructed (as posted in the field,) no less than 50 feet wide and no more than 70 feet wide unless otherwise stated or approved by STATE. Surface is to be outsloped or crowned for drainage with general grade no more than 3 percent. Surface as shown in the "Road Surfacing" table in this Exhibit, with 2 feet of subgrade extending out from base of the surfacing.

TURNAROUNDS. Increase subgrade width an additional 20 feet for a length of 20 feet at locations marked in the field.

EXHIBIT D

FOREST ROAD SPECIFICATIONS

GENERAL ROAD CONSTRUCTION INSTRUCTIONS:

Excavated Materials. Excavated materials shall be utilized for road construction and hauled in where required. All surplus excavation materials shall be hauled to the waste areas as marked in the field and/or designated on Exhibit A. Surplus excavated materials and waste materials shall be sloped and compacted for drainage.

Drainage Ditches. Construct ditchlines, including ditchouts, as directed by STATE. Cutslopes of ditchlines and ditchouts shall not exceed a 1:1 slope. Construct culvert sediment basins. Waste materials from drainage ditches and sediment basins shall be placed in nearby waste areas and uniformly sloped and compacted for drainage, as directed by STATE.

Culvert Installation. Fill construction backfill shall consist of select materials and may be obtained from borrow pits, as directed by STATE. Backfill materials shall be hauled in where necessary and thoroughly compacted in accordance with this Exhibit. Culvert installation shall meet the requirements of the "Culvert Specifications" exhibit.

Energy Dissipator Construction. Where rock is used for an energy dissipator, rock shall be placed below the culvert outlet and embedded for a minimum of 3 feet, in accordance with the "Energy Dissipator Exhibit".

Fill Armor. Where rock is specified for fill armor, rock shall be machine placed and tamped at a 1½:1 slope, beginning at the toe of the fill.

Settling Ponds. Construct settling ponds for erosion control in project areas and ditchlines where sedimentation or erosion is possible as directed by STATE. Excavated material shall be hauled to the designated waste areas designated on Exhibit A. Waste materials shall be sloped and compacted for drainage. Settling pond dimensions shall be a finished length of 3 feet, width of 3 feet, depth of 3 feet and 3 feet apart, or as directed by STATE.

Erosion Control. Install erosion control measures in all areas which have the potential, as determined by STATE, to deliver sediment to Waters of the State. Install bio bags, silt fence, or straw bales for erosion control in project areas and ditch lines where sedimentation or erosion is possible, as directed by STATE. Each Bio-bag shall be installed with a minimum of two wooden stakes.

Material Storing and Staging. No materials shall be stored or staged within the boundaries of any riparian conservation area or equipment restriction zone. To include dirt, soil, aggregate and fuel stored in fuel cans, transfer tanks, vehicles or equipment. Staging areas must be constructed in a manner so that to be hydrologically disconnected from the stream. Culverts, logs for stream enhancement and erosion control supplies may be stored within the boundaries.

Seasonal Winterization. All unsurfaced roads or unfinished subgrades shall be blocked from vehicular traffic and waterbarred in accordance to the Waterbar and Tank Trap specifications in this contract. Areas of bare soil that have the potential to deliver sediment shall have grass seed and mulch placed in accordance to the Seeding and Mulch specification in this contract. All seasonal winterization shall be completed prior to October 1, annually and as directed by STATE.

Subgrade Preparation and Application of Surfacing Rock.

- (a) Complete culvert installations, drainage ditches, fill construction, ditchouts, (settling ponds,) (subgrade reinforcement) and other specified work prior to the application of surfacing rock.
- (b) Subgrade shall be crowned, outsloped, or insloped at 4 to 6 percent.
- (c) Upon completion and approval by STATE of above required work, apply, process, and compact surfacing rock in accordance with specifications in the "Compaction and Processing Requirements" in this exhibit.
- (d) Final road surface shall be crowned, outsloped, or insloped at 4 to 6 percent, to the depth specified in the "Rock Table" in this exhibit.

EXHIBIT D

FOREST ROAD SPECIFICATIONS

SPECIFIC ROAD CONSTRUCTION INSTRUCTIONS:

<u>Segment</u>	<u>Station</u>	<u>Work Description</u>
C to D	0+00	Point C. Junction with A to B. <input type="checkbox"/> Begin road construction. <input type="checkbox"/> Crown road. <input type="checkbox"/> Begin ditch construction.
	1+70	Hiking trail on left and right. <input type="checkbox"/> Maintain trail access.
	2+85	Point E. Junction with E to F on right.
	5+35	<input type="checkbox"/> Construct roadside landing on right.
	8+00	<input type="checkbox"/> Construct roadside landing on left.
	11+45	<input type="checkbox"/> Construct roadside landing on right.
	18+55	<input type="checkbox"/> Construct 180' approach to landing on left.
	21+15	<input type="checkbox"/> Construct turnaround.
END	21+65	Point D. <input type="checkbox"/> End road construction. <input type="checkbox"/> Construct landing.

<u>Segment</u>	<u>Station</u>	<u>Work Description</u>
E to F	0+00	Point E. Junction with C to D. <input type="checkbox"/> Begin road construction. <input type="checkbox"/> Crown road. <input type="checkbox"/> Begin ditch construction.
	7+50	<input type="checkbox"/> Install Culvert No. 1 (18" x 30') as cross drain.
	7+85	<input type="checkbox"/> Construct roadside landing on right.
	16+00	<input type="checkbox"/> Begin drift to maintain grade ≤ 12%.
	18+50	Road follows old grade. <input type="checkbox"/> End drift.
	20+45	Live Stream. Possible puncheon. <input type="checkbox"/> Remove puncheon and/or unsuitable material. <input type="checkbox"/> End-haul unsuitable material to Waste Area. <input type="checkbox"/> Construct fill with local material. <input type="checkbox"/> Install Culvert No. 2 (24" x 50').
	23+50	<input type="checkbox"/> Install Culvert No. 3 (18" x 30') as cross drain.
	23+65	Waste Area on right. <input type="checkbox"/> Develop Waste Area.
	27+80	<input type="checkbox"/> Construct turnaround.
END	28+30	Point F. <input type="checkbox"/> End road construction. <input type="checkbox"/> Construct landing.

<u>Segment</u>	<u>Station</u>	<u>Work Description</u>
H to I	0+00	Point H. Junction with H to I. <input type="checkbox"/> Begin road construction. <input type="checkbox"/> Crown road. <input type="checkbox"/> Begin ditch construction.

EXHIBIT D

FOREST ROAD SPECIFICATIONS

SPECIFIC ROAD CONSTRUCTION INSTRUCTIONS:

H to I Continued END	1+50	Point I. <input type="checkbox"/> End road construction. <input type="checkbox"/> Construct landing.
-------------------------------------	------	--

<u>Segment</u>	<u>Station</u>	<u>Work Description</u>
H to J	0+00	Point H. Junction with H to J. <input type="checkbox"/> Begin road construction. <input type="checkbox"/> Crown road. <input type="checkbox"/> Begin ditch construction.
END	1+25	Point J. <input type="checkbox"/> End road construction. <input type="checkbox"/> Construct landing.

EXHIBIT D

FOREST ROAD SPECIFICATIONS

GENERAL ROAD IMPROVEMENT, SURFACE ROCK REPLACEMENT AND MAINTENANCE INSTRUCTIONS:

Excavated Materials. All surplus excavation materials shall be hauled to the waste areas as marked in the field and/or designated on Exhibit A. No excavated material shall remain within any RCA.

Bank Slough Removal. Excavate all bank slough. Bank slough material shall not be pulled across existing surfacing rock. Excavated material, including woody debris shall be loaded and hauled to designated waste areas and shall be accomplished with the use of an excavator and dump truck.

Drainage Ditches. Restore or construct ditchlines, including ditchouts, as directed by STATE. Clean out all culvert inlets and outlets for a 10-foot radius. Re-establish or construct culvert sediment basins. Waste materials from drainage ditches and sediment basins shall not be pulled across existing rock surfacing but shall be loaded with an excavator, hauled by dump truck and placed in designated waste areas. Vegetation in the ditch shall not be removed if ditch conditions are acceptable by STATE.

Culvert Replacement and Installation. Existing culvert geometry shall be modified to provide for optimum drainage and culvert performance. Modifications may include, skewing the culvert and/or installing the culvert at gradients equal to or exceeding the drainage or ditch gradient. Culvert installation shall meet the requirements of the "Culvert Specifications" exhibit.

Sod Removal. Remove/ separate sod from crushed rock surfacing as directed by STATE. Sod material shall be scattered in stable locations through openings in the timber outside of the cleared right-of-way. In areas where sod cannot be scattered in a stable location, material shall be end hauled to designated waste areas as shown in Exhibit A, or other stable locations as directed by STATE.

Erosion Control. Install erosion control measures in all areas which have the potential, as determined by STATE, to deliver sediment to Waters of the State. Install bio bags, silt fence, or straw bales for erosion control in project areas and ditch lines where sedimentation or erosion is possible, as directed by STATE. Each Bio-bag shall be installed with a minimum of two wooden stakes.

Material Storing and Staging. No materials shall be stored or staged within the boundaries of any riparian conservation area or equipment restriction zone. To include dirt, soil, aggregate and fuel stored in fuel cans, transfer tanks, vehicles or equipment. Staging areas must be constructed in a manner so that to be hydrologically disconnected from the stream. Culverts, logs for stream enhancement and erosion control supplies may be stored within the boundaries.

Seasonal Winterization. All unsurfaced roads or unfinished subgrades shall be blocked from vehicular traffic and waterbarred in accordance with the Waterbar and Tank Trap specifications in this contract. Areas of bare soil that have the potential to deliver sediment shall have grass seed and mulch placed in accordance to the Seeding and Mulch specification in this contract. All seasonal winterization shall be completed prior to October 31, annually and as directed by STATE.

Subgrade Preparation and Application of Surfacing Rock.

- (a) Complete culvert installations, drainage ditches, fill construction, ditchouts, settling ponds, and other specified work prior to the application of surfacing rock.
- (b) Cut out all potholes and/or washboard sections from the existing surfacing and apply any required subgrade reinforcement or spot rock.
- (c) Process, grade and mix, the existing surface. Provide for a crown, outslope, or inslope of 4 to 6 percent, and compact in accordance to the "Compaction and Processing Requirements" in this exhibit.
- (d) Upon completion of above required work, apply, process, and compact surfacing rock in accordance with this exhibit

EXHIBIT D

FOREST ROAD SPECIFICATIONS

GENERAL ROAD IMPROVEMENT, SURFACE ROCK REPLACEMENT AND MAINTENANCE INSTRUCTIONS:

<u>Segment</u>	<u>Station</u>	<u>Work Description</u>
A to B	0+00	Point A. Junction with Round Top Road. <input type="checkbox"/> Begin road improvement. <input type="checkbox"/> Crown road. <input type="checkbox"/> Do not clean ditch unless directed to by STATE.
	6+15	Junction on left.
	11+55	Hiking trail on left and right. <input type="checkbox"/> Maintain trail access.
	13+90	Existing culvert. <input type="checkbox"/> Install marker.
	20+00	Existing culvert. <input type="checkbox"/> Install marker.
	25+50	Point C. Junction with C to D on right. Junction on left.
END	28+60	Point B. Junction with trail on left and right. <input type="checkbox"/> Maintain trail access. <input type="checkbox"/> End road improvement.

<u>Segment</u>	<u>Station</u>	<u>Work Description</u>
G to H	0+00	Point G. Rice Road. Junction with Round Top Road. <input type="checkbox"/> Begin road improvement. <input type="checkbox"/> Crown road. <input type="checkbox"/> Begin roadside brushing. <input type="checkbox"/> Do not clean ditch unless directed to by STATE
	4+50	Existing culvert. <input type="checkbox"/> Install marker.
	12+15	Existing culvert. <input type="checkbox"/> Install marker.
	18+55	Junction on left.
	20+95	Junction on left.
	24+55	Existing culvert. <input type="checkbox"/> Clean inlet and outlet. <input type="checkbox"/> Install marker.
	40+30	Existing culvert. <input type="checkbox"/> Clean inlet and outlet. <input type="checkbox"/> Install marker.
	46+50	Existing culvert. <input type="checkbox"/> Install marker.
	88+20	Junction with Coffee Creek Road on left.
	94+90	Junction on left.
	109+70	Junction on left.
	114+25	Existing culvert. <input type="checkbox"/> Install marker.
	117+40	Existing culvert. <input type="checkbox"/> Install marker.
	146+80	Existing culvert. <input type="checkbox"/> Install marker.
	147+00	Junction on left. Yellow gate on left.
	149+70	Junction on left.

EXHIBIT D

FOREST ROAD SPECIFICATIONS

GENERAL ROAD IMPROVEMENT, SURFACE ROCK REPLACEMENT AND MAINTENANCE INSTRUCTIONS:

<u>Segment</u>	<u>Station</u>	<u>Work Description</u>
G to H	150+65	Junction on right.
	160+70	Junction on right.
END	166+40	Point H. Junction with H to I on left and H to J on right. <input type="checkbox"/> End roadside brushing. <input type="checkbox"/> End road improvement.

EXHIBIT D

FOREST ROAD SPECIFICATIONS

WASTE AREA AND END-HAUL REQUIREMENTS

Waste Area Location

- Waste Areas shall be located outside of all RCAs and ERZs.
- Waste Areas shall be hydrologically disconnected from Live Streams.
- Shall be located as shown on Exhibit A, as marked in the field or as approved by STATE.
- Setback from slope break shall be a minimum of 20 feet horizontal measurement.

Waste Area Treatment

- Deposit at waste area, spread evenly, compact, and provide adequate drainage.
- Pile woody debris separate from other waste material.
- Mulch and seed all waste areas in accordance with Exhibit I.

Full Bench and End-Haul Area - General Requirements

Sidecast includes any road generated excess excavation material which is not essential as part of the road prism, is not compacted, and is below the roadway. Material shall not be sidecast unless specified above.

Containment/Sidecast

- Full: No excavated material remains below the road.

Any amount of material exceeding the containment requirements shall be removed by whatever means necessary and end-hauled to a designated waste area.

EXHIBIT D

FOREST ROAD SPECIFICATIONS

ROCK TABLE

ROAD SEGMENT: C to D				Sta. to Sta.				TOTAL VOLUME (CY)
Application	Rock Size and Type	Location	Depth of Rock (inches)	0+00 to 21+65				
				Volume (CY) Per		Number of		
Roadside Landing	Jaw-run	8+00	10	Landing	80	Landings	1	80
Landing	Jaw-run	Approach to landing & Point D	10	Landing	10	Landings	2	160
Total Rock for Road Segment:								240

ROAD SEGMENT: E to F				Sta. to Sta.				TOTAL VOLUME (CY)
Application	Rock Size and Type	Location	Depth of Rock (inches)	0+00 to 28+30				
				Volume (CY) Per		Number of		
Landing	Jaw-run	Point F	10	Landing	80	Landings	1	80
Total Rock for Road Segment:								80

ROAD SEGMENT: H to I				Sta. to Sta.				TOTAL VOLUME (CY)
Application	Rock Size and Type	Location	Depth of Rock (inches)	0+00 to 1+50				
				Volume (CY) Per		Number of		
Landing	Jaw-run	Point H	10	Landing	80	Landings	1	80
Total Rock for Road Segment:								80

ROAD SEGMENT: H to J				Sta. to Sta.				TOTAL VOLUME (CY)
Application	Rock Size and Type	Location	Depth of Rock (inches)	0+00 to 1+25				
				Volume (CY) Per		Number of		
Landing	Jaw-run	Point J	10	Landing	80	Landings	1	80
Total Rock for Road Segment:								80

TOTAL ROCK	Jaw-run
480 CY	480 CY

Roads shall be uniformly graded, shaped and approved by STATE prior to rocking.

Total rock cubic yard volumes are rounded to the whole yard.

EXHIBIT D

FOREST ROAD SPECIFICATIONS

ROCK ACCOUNTABILITY

PURCHASER shall obtain subgrade approval from STATE prior to rocking. Rocking shall be limited to periods when weather conditions are acceptable to STATE and when sediment will not enter streams. Additional surfacing needed because of construction season or construction practice is not included in the preceding ROAD SURFACING table and shall be furnished at PURCHASER expense.

Rock accountability shall be determined by the following methods, as directed by STATE. STATE shall be given 24 hours' notice prior to rocking.

Depth Measurement. Rock shall be spread and compacted according to the depths specified in Exhibit D. Truck measure volumes are given but shall not limit the amount of rock spread.

Depth shall be determined in the most compacted area of the surface cross section. The depth of compacted aggregates shall not vary more than 1 inch from the depth specified in the "Road Surfacing" table in Exhibit D. The average depth for each road segment shall be the specified depth or greater. If additional rock is required because of insufficient depth, the locations and volumes to be added shall be determined by STATE.

EXHIBIT D

FOREST ROAD SPECIFICATIONS

COMPACTION AND PROCESSING REQUIREMENTS

Moisture Content: Compaction must take place when moisture content of the materials being compacted is favorable for effective compaction as determined by STATE.

Compaction Pass: A pass is defined as traveling a road section forward and then backward over that same section.

Subgrade. Subgrade surfaces of the road segments listed below shall be graded and compacted prior to rocking. Compaction shall be accomplished by traveling all surfaces from shoulder to shoulder until the surface is smooth and hard and visible deformation ceases. At least 3 passes shall be made over the entire width and length of the road. Compaction shall be accomplished by using one or more of the approved equipment options listed below:

Subgrade shall be crowned, outsloped, or insloped at 4 to 6 percent as specified in the "Forest Roads Specifications" table in Exhibit D.

ROAD SEGMENT	SUBGRADE COMPACTION OPTIONS
All road segments that require rock surfacing	Vibratory Roller
All road segments that require subgrade reinforcement rock	Vibratory Grid Roller or a combination of Vibratory Roller and Dozer

Fills. Embankments and fills shall be placed in (approximately) horizontal layers not more than 8 inches in depth. Each layer shall be separately, and thoroughly, compacted. Compaction equipment shall be operated over the entire width of each layer until visible deformation of the layers ceases. At least 3 passes shall be made over the entire width and length of each layer.

Placing individual rocks or boulders with more depth than the allowed layer thickness shall be permitted, provided the embankment will accommodate them. Such rocks and boulders shall be at least 6 inches below the subgrade. They shall be carefully distributed, and the voids filled with finer material, forming a dense and compacted mass. Compaction shall be accomplished by using one or more of the approved equipment options listed below:

ROAD SEGMENT	FILL COMPACTION OPTIONS
All road segments	Vibratory Roller, Vibratory Hand-Operated, Backhoe-Mounted Tamper, or Dozer

EXHIBIT D

FOREST ROAD SPECIFICATIONS

COMPACTION AND PROCESSING REQUIREMENTS

Jaw-run Rock. The rock shall be uniformly mixed and spread in layers on the approved roadbed. Each layer of pit-run rock shall be moistened or dried to uniform moisture content suitable for maximum compaction and compacted in layers not to exceed 8 inches in depth. When more than 1 layer is required, each shall be shaped and compacted before the succeeding layer is placed. Any irregularities or depressions that develop during compaction of the top layer shall be corrected by loosening the material at these places and adding or removing material until the surface is smooth and uniform. Each layer shall be compacted with a minimum of 3 passes over the entire width and length of the road. Compaction shall be accomplished by using one or more of the approved equipment options listed below:

Rock shall be crowned, outsloped, or insloped at 4 to 6 percent as specified in the "Forest Roads Specifications" table in Exhibit D.

ROAD SEGMENT	JAW-RUN COMPACTION OPTIONS
Segments requiring pit-run rock	Vibratory Grid Compactor or a combination of Vibratory Roller and Dozer

COMPACTION EQUIPMENT OPTIONS

Vibratory Rollers. The drum shall have a smooth surface, a diameter not less than 48 inches, a width not less than 58 inches, and a turning radius of 15 feet or less. Vibration frequency shall be regulated in steps to 1400, 1500, and 1600 VPM, corresponding to engine speeds of 1575, 1690, and 1800 RPM. The centrifugal force developed shall be 7 tons at 1600 VPM. It shall be activated by a power unit of not less than 25 horsepower. The vibratory roller shall be self-propelled and operated at speeds ranging from 0.9 miles to 1.8 miles per hour, as directed by STATE.

Vibratory Hand-Operated or Backhoe-Mounted Tamper. Vibratory hand-held or hydraulic tampers shall be used for compaction of backfill materials around culverts. The tamper shoe dimensions shall be a minimum of 10" X 13" and capable of a centrifugal force of 2,250 pounds.

Vibratory Grid Compactors. The roller shall have a grid surface and have an operating weight of 32,000 pounds or more. The rock shall be worked with a grader weighing at least 20,000 pounds during the grid rolling process. All rock shall come in contact with the vibratory grid compactor.

Dozer. A dozer/track-type tractor weighing a minimum of 45,000 pounds as directed by STATE shall be operated over the jaw-run rock so that the entire surface comes in contact with the tracks.

EXHIBIT E

CULVERT SPECIFICATIONS

All culverts and drainage structures shall be installed as soon as possible and before October 31 annually.

All culvert materials shall be furnished and installed by PURCHASER, unless otherwise specified in the Contract.

Uninstalled culverts shall become property of the STATE. PURCHASER will deliver surplus culverts to the district office as directed by STATE.

Culverts 36 inches in diameter and smaller shall be constructed of corrugated polyethylene.

Joining shall be done with bands of like material and corrugations. Manufacturers' instructions shall be followed for prefabricated pipe assembly. Polyethylene joints shall be made with split couplings, corrugated to engage the culvert corrugations, and shall engage a minimum of 4 corrugations, 2 on each side of the culvert joint.

The STATE Representative shall determine final culvert locations and stake the locations in the field prior to installation.

Culverts in live streams shall be installed with the inlet and outlet on grade with the stream bottom, unless otherwise specified in writing.

Cross Drain Culverts

Cross drain culverts on road grades in excess of 3 percent shall be skewed at least 30 degrees from perpendicular to the road centerline, except that cross drain culverts at the low point of dips in roads shall not be skewed. Cross drains shall be skewed to fit the required culvert length to the road prism.

Cross drain culverts shall be installed at a slope steeper than the incoming ditch grade, but not less than 3 percent or greater than 10 percent.

Disconnect Culverts

The culvert inlet shall be located as close to the channel that it is disconnecting, while the culvert outlet shall be located as far from the channel as possible; discharge culvert outflow on the forest floor, allowing for filtration before the water enters the disconnected channel.

The foundation and trench walls for all culverts shall be free from logs, stumps, limbs, stones, and other objects which would dent or damage the culvert. The culvert trench shall be excavated 3 culvert diameters wide to permit compaction and working on each side of the culvert. Tamping shall be done in 6-inch lifts, 1 culvert diameter each side of the culvert. Bedrock shall be excavated as required to provide a uniform foundation for the full length of the culvert.

A bedding of crushed rock, as specified, shall be placed to provide a wide band of support and to transmit the load from above evenly over the entire length of the culvert for all live stream culverts and all culverts on road improvement segments.

Backfill shall consist of crushed rock on improvement segments and job-excavated soil free of stumps, limbs, rocks, or other objects which would damage the culvert on new construction segments.

EXHIBIT E

CULVERT SPECIFICATIONS

Minimum height of cover over top of culvert to subgrade when road is to be rocked shall be as follows: 12" for culverts 18" to 36". Minimum vertical cover for other designs shall be as specified by STATE.

Lengths of individual culvert sections shall be not less than 10 feet, unless otherwise provided for in special instructions. The shortest culvert section length shall be placed at the inlet end.

The ends of each culvert shall be free of logs and debris which would restrict the free flow of water.

The intake end of cross drain and disconnect culverts shall be provided with a sediment catching basin 3 feet in diameter at the bottom. The outlet end of any culvert which would allow water to erode embankment soil shall be provided with an energy dissipator, half round, or other approved slope protection device. Construct lead-off ditches away from culvert outlets where the slope gradients restrict the free flow of water.

Culverts 36 inches in diameter or larger shall have 1:1 step beveled inlets.

Compaction by tamping utilizing a Vibratory Hand-Operated or Backhoe-Mounted Tamper is required for all stream crossing culverts and culverts on improvement sections.

All culverts scheduled for replacement shall become property of the PURCHASER and be removed from STATE land in the same project period in which replacement occurred. Damaged culvert inlets and/or outlets shall be repaired by opening them with a hydraulic jack, or cutting off the culvert end to allow for free passage of water at peak flow levels.

The intake ends of culverts in fills less than 3 feet to the top of the culvert shall be marked by driving steel posts within 6 inches of the downgrade side. Posts shall be painted with a rust-resistant paint and be a minimum of 5 feet long, with the spade driven 2 feet into the ground. Install a culvert marker at each existing culvert that is missing a marker that could be reached by a grader blade.

A manufacturer's certification that the product was manufactured, tested, and supplied in accordance with this specification shall be furnished to STATE upon request.

EXHIBIT E
CULVERT LIST

CULVERT NO.	DIAMETER (Inches)	LENGTH (Feet)	ROAD SEGMENT POINT TO POINT	STATION
1	18	30	E to F	7+50
2	24	50	E to F	20+45
3	18	30	E to F	23+50

TOTAL LENGTHS BY DIAMETER	
18 INCH	24 INCH
60 FEET	50 FEET

EXHIBIT F
ROAD BRUSHING SPECIFICATIONS

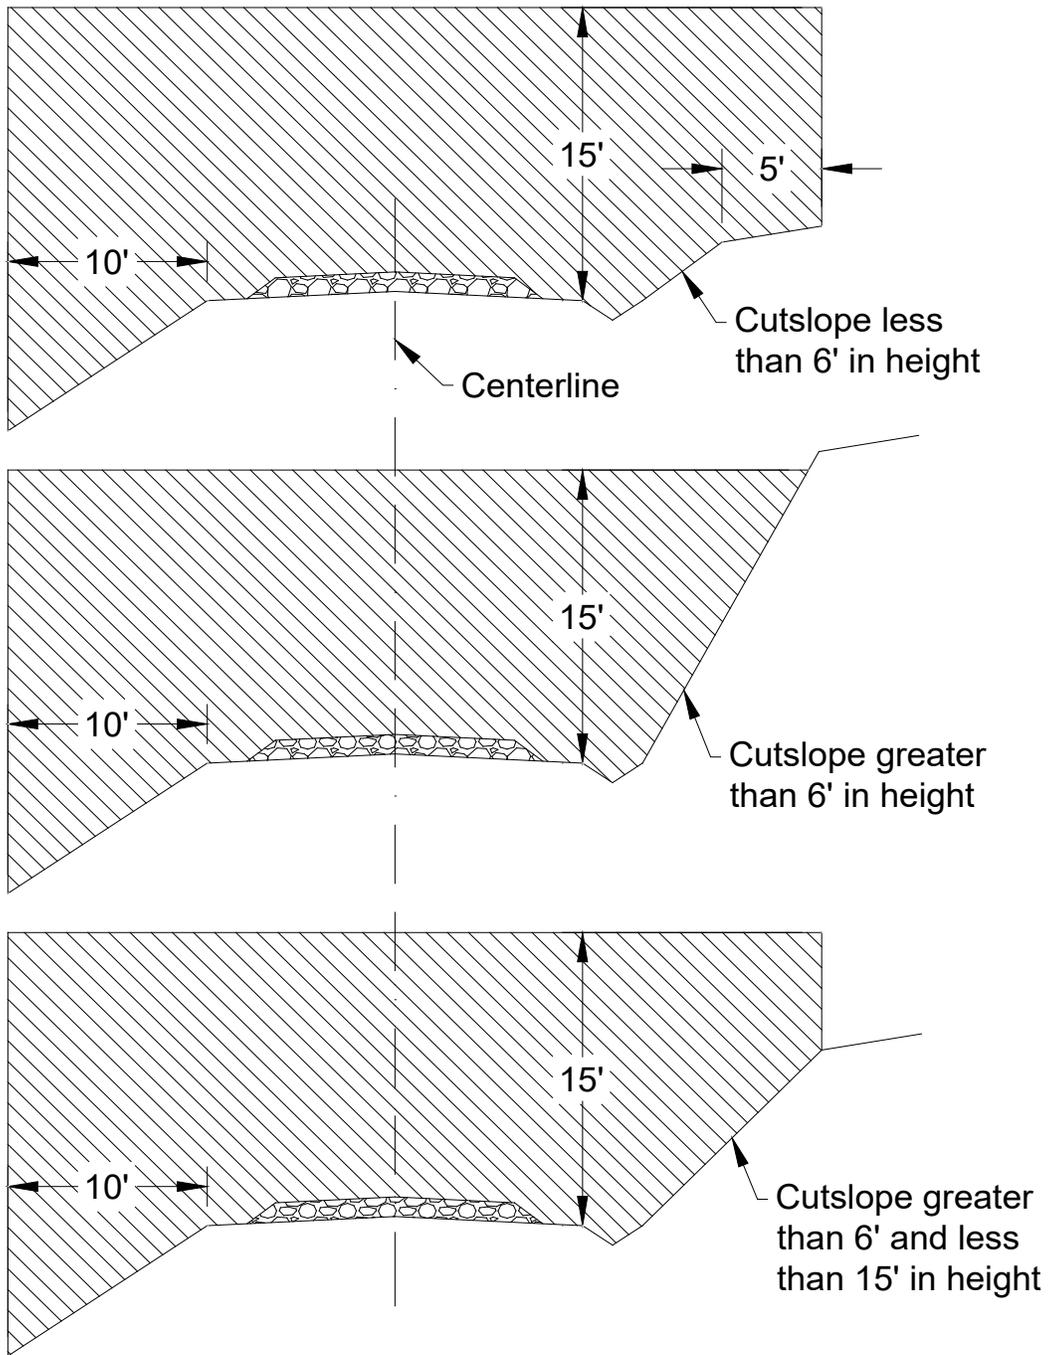


EXHIBIT F

ROAD BRUSHING SPECIFICATIONS

REQUIREMENTS

The minimum height of clearing shall be 15 feet from the road surface, and the minimum width of clearing on the down slope side of the road shall be 10 feet horizontal distance. The minimum width of brushing on the cut slope side of the road shall be dictated by the height of the cut slope as indicated in the three drawings above.

Brush and trees shall be cut to a maximum height of 6 inches above the ground surface or obstructions such as rocks or existing stumps.

Debris resulting from the brushing operation shall be removed from the roadway, cut slope, ditches, water courses, culvert inlets and outlets and sediment catching basins. Debris shall be mulched or scattered downslope from the road or placed in other stable locations. Large debris, 6 inches or larger in diameter, shall be mulched or cut into lengths 6 feet or less to facilitate rapid decay, unless otherwise approved by STATE.

Trees larger than 6 inches in diameter at stump height, located within clearing limits but outside of the ditch line or shoulder, shall not be cut down, but shall be limbed for road visibility. Planted or established conifers, located within brushing limits but outside of the ditch line or shoulder, shall not be cut down, but shall be limbed for road visibility unless otherwise directed by STATE.

Existing debris on the roadway, cut slope, ditch line, or catch basin shall be removed and treated. Debris shall be mulched or scattered downslope from the road or placed in other stable locations. Large non-merchantable debris, 6 inches or larger in diameter, shall be mulched or cut into lengths 6 feet or less to facilitate rapid decay, unless otherwise approved by STATE.

Merchantable blown down trees encountered shall be bucked in lengths as directed by STATE, and placed in locations acceptable to STATE, or pushed out of the road prism.

When spur roads to be brushed end with a Landing, the Landing is to be brushed as directed by STATE.

Brushing operations shall be completed before road improvement: road grading or surfacing of rock within the project area. If damages occur to the road surface outside of project area PURCHASER may be required to repair damages as directed by STATE.

DAMAGES


Culverts, Culvert Markers, Culvert Tags, Road Markers, Mile Markers, Point Signs, Timber Sale Boundary Tags, Project Point Signs, OHV Signs and Gates damaged, destroyed or displaced during brushing operations shall be repaired or replaced by PURCHASER or as directed by STATE.

EXHIBIT G

WATERBAR SPECIFICATIONS

PROFILE


DITCHED AND OUTSLOPED

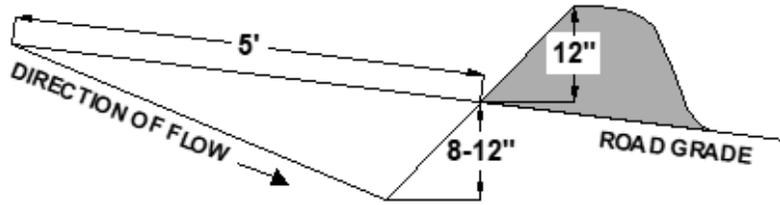


SPACING OF WATERBARS	
ROAD GRADE	DISTANCE
< 6 %	400'
6 - 10 %	200'
11 - 15 %	150'
> 15 %	100'

CROSS SECTION

DITCHED

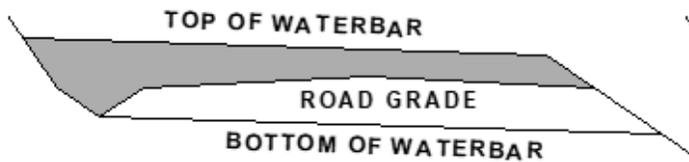


OUTSLOPED

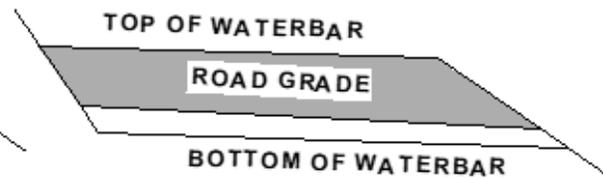

CONSTRUCT DITCHOUT THRU ANY EXISTING BERM.
CROSS DRAINAGE GRADIENT MINIMUM 3%.

PLAN VIEW

DITCHED

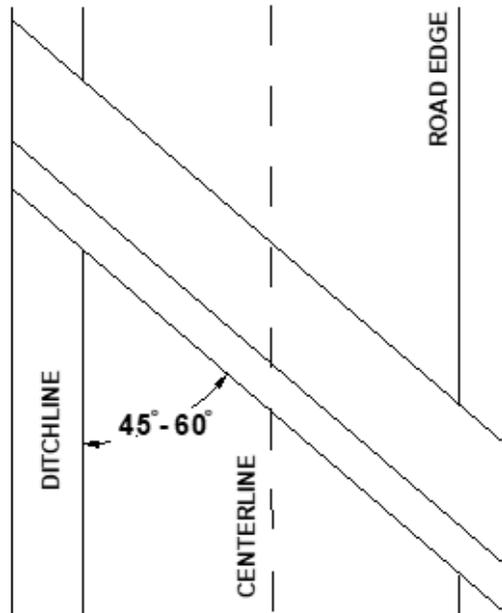

OUTSLOPED


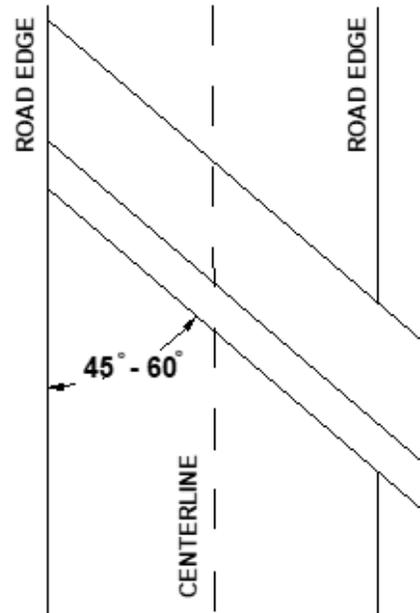


EXHIBIT G


TANK TRAP SPECIFICATIONS

PROFILE DITCHED AND OUTSLOPED

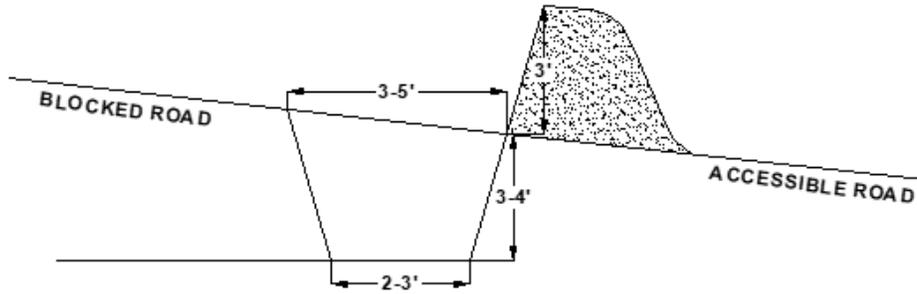


CROSS SECTION

DITCHED




OUTSLOPED

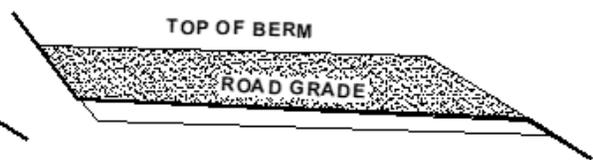


CONSTRUCT DITCHOUT THRU ANY EXISTING BERM.
CROSS DRAINAGE GRADIENT MINIMUM 3%

PLAN VIEW

DITCHED

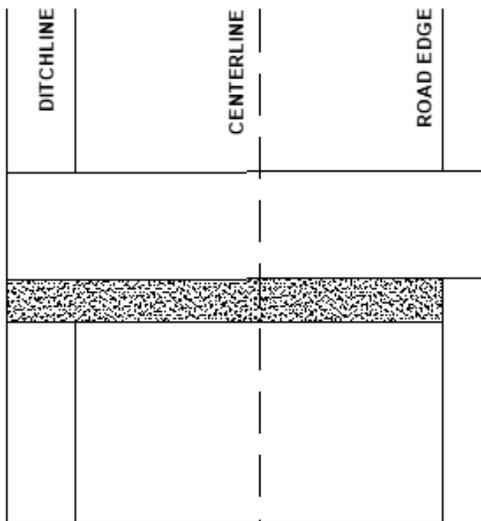

OUTSLOPED

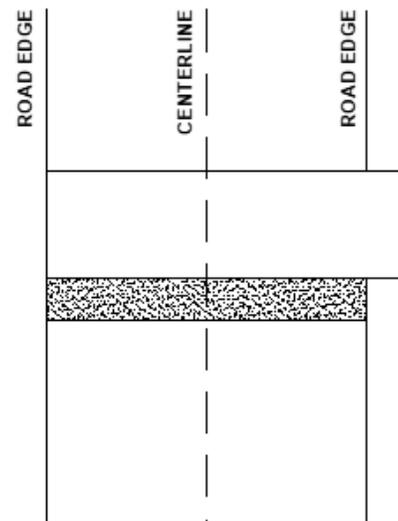

It should be sloped to drain with a relief ditch through the down slope edge of the road. The trench shall be behind the berm for approaching traffic.

EXHIBIT H

ROAD VACATING SPECIFICATIONS

PURCHASER shall vacate road between the following points: C to D & E to F.

Specific objectives for this project include:

Woody Debris. Woody debris shall be placed on the surface of pullback/fill material.

Block Roads. Use excavated material from fill removals, boulders to block roads from vehicle access, as directed by STATE.

Erosion Control. Erosion control shall be completed in a progressive manner. Grass seed and straw mulch shall be applied for every 500 feet of road vacated, prior to continuing work.

Fill Removal and Stream Channel Development. Remove fills to the natural stream course level(s). Stream channel(s) shall be excavated/developed to specified widths. Developed stream banks shall be sloped at natural contours or no steeper than 2:1, as directed by STATE. Do not place excavated material within a riparian management area. If a riparian management area is not required, do not place excavated material within 75 ft. of stream channel.

Culvert Removal. Remove drainage structures and culverts. Removed culverts shall be hauled to an approved refuse site off of STATE land.

Dry Conditions. All work shall be performed during dry conditions acceptable to STATE.

SPECIFIC INSTRUCTIONS/SPECIFICATIONS:

<u>Segment</u>	<u>Station</u>	<u>Work Description</u>
C to D	0+00	Point C. <input type="checkbox"/> Begin road vacating. <input type="checkbox"/> Construct tank trap. <input type="checkbox"/> Begin ripping road surface. <input type="checkbox"/> Place slash over road prism.
	1+70	Hiking trail on left and right. <input type="checkbox"/> Maintain trail access.
	2+85	Point E. Junction with E to F on right.
	5+35	Roadside landing on right. <input type="checkbox"/> Rip roadside landing. <input type="checkbox"/> Place slash over roadside landing.
	8+00	Roadside landing on left. <input type="checkbox"/> Rip roadside landing. <input type="checkbox"/> Place slash over roadside landing.
	11+45	Roadside landing on right. <input type="checkbox"/> Rip roadside landing. <input type="checkbox"/> Place slash over roadside landing.
	18+55	180' approach to landing on left. <input type="checkbox"/> Rip road surface on left. <input type="checkbox"/> Rip landing on left. <input type="checkbox"/> Place slash over road prism and landing on left.
	End	21+65

EXHIBIT H
ROAD VACATING SPECIFICATIONS

SPECIFIC INSTRUCTIONS/SPECIFICATIONS:

<u>Segment</u>	<u>Station</u>	<u>Work Description</u>
E to F	0+00	Point E. <input type="checkbox"/> Begin road vacating. <input type="checkbox"/> Begin ripping road surface. <input type="checkbox"/> Place slash over road prism.
	7+50	Existing culvert. <input type="checkbox"/> Remove existing culvert.
	7+85	Roadside landing on right. <input type="checkbox"/> Rip roadside landing. <input type="checkbox"/> Place slash over landing.
	20+45	Existing culvert. <input type="checkbox"/> Remove existing culvert. <input type="checkbox"/> Restore stream bank to 4 feet <input type="checkbox"/> Mulch and grass seed stream channel. <input type="checkbox"/> End-haul all waste material to waste area.

<u>Segment</u>	<u>Station</u>	<u>Work Description</u>
H to I	0+00	Point H. <input type="checkbox"/> Construct tank trap.

<u>Segment</u>	<u>Station</u>	<u>Work Description</u>
H to J	0+00	Point H. <input type="checkbox"/> Construct tank trap.

EXHIBIT I

SEEDING AND MULCHING

This work shall consist of preparing seedbeds and furnishing and placing required native seed, fertilizer, and straw mulch. Straw mulch shall consist of straw that is free of noxious weeds. Apply seed and fertilizer to all waste areas, and bare soils resulting from Project Nos. 1, 2 & 3. Apply straw mulch to all bare soils within 100' of streams resulting from Project Nos. 1, 2 & 3 and to all waste areas.

Seeding Seasons. Seeding shall be performed only from March 1 through June 15 and August 15 through October 31. Seeding materials shall not be applied during windy weather or when the ground is excessively wet or frozen. Areas of disturbed soil shall be seeded by the end of the project period in which work was started. PURCHASER shall notify STATE within 24 hours of seeding and fertilizer application.

APPLICATION METHODS FOR SEED AND FERTILIZER

Dry Method. Mechanical seeders, seed drills, landscape seeders, cultipacker seeders, fertilizer spreaders, or other approved mechanical seeding equipment shall be used to apply the seed and fertilizer in the amounts and mixtures specified. Hand-operated seeding devices may be used when seed and fertilizer are applied in dry form.

APPLICATION RATES FOR SEED AND FERTILIZER

Native Grass Seed. Listed grass seed below shall be applied at specific broadcast rates that coincide with grass seed selected by purchaser in accordance with the table below. The seed mixture shall be approved by STATE or comprised of at least three of the following and sufficiently mixed before application:

Native Grass Species	lbs	Coverage Ft²	Broadcast Rate lbs/acre
Barley Meadow	1	1740	50-62.5
Bentgrass Spike	1	43560	2-2.5
Bluegrass Pine	1	21780	2-2.5
Brome Alaska	1	1980	2-2.5
Brome California	1	1740	50-62.5
Brome Columbia	1	1980	44-55
Fescue Native Red	1	2200	20-25
Fescue Roemers	1	3630	24-30
Fescue sand	1	3110	28-35
Fescue Western	1	2900	15
Hairgrass Slender	1	7260	12-15
Hairgrass Tufted	1	10890	8-10
Junegrass Prairie	1	43560	2-2.5
Lemmons Needlegrass	1	2900	30-37.5
Oatgrass California	1	1240	70-87.5
Sloughgrass American	1	4355	20-25
Wheatgrass Slender	1	2180	20
Wildrye Blue	1	2175	40-50

Fertilizer: Chemical analysis shall be 16-20-0 and shall be applied at the rate of 200 pounds per acre. Fertilizer shall not be applied within 100 feet of streams.

Mulching Period. Straw mulch shall be applied within 24 hours of spreading grass seed and fertilizer.

EXHIBIT I

SEEDING AND MULCHING

APPLICATION RATES FOR MULCH

Place straw mulch to a reasonably uniform thickness of 1½ to 2½ inches. This rate requires between 2 and 3 tons of dry mulch per acre.

Application Locations:

Road Segment	Location
C to D	0+00 to 21+65
E to F	Culvert No. 2
E to F	Waste Area at 23+65
H to I	0+00 to 1+50
H to J	0+00 to 1+25