



**Oregon Department of Forestry**  
 2600 State St Salem OR 97310  
 PART III: EXHIBITS

**EXHIBIT B**  
**TIMBER SALE OPERATIONS PLAN**  
 (See page 2 for instructions)

Date Received by State: \_\_\_\_\_

(5) State Brand Information ( Complete)

(1) Contract Number: TL-341-2025-W00971-01

(2) Sale Name: North Miami

(3) Contract Expiration Date: 10/31/2028

(4) Purchaser Name: \_\_\_\_\_

(6) State Representatives:

<u>Name</u>	<u>Circle One</u>	<u>Phone No.</u>	<u>Cell No.</u>	<u>Alt Phone</u>
	Logging Projects All			
	Logging Projects All			
	Logging Projects All			
	Logging Projects All			

(7) Purchaser Representatives:

<u>Name</u>	<u>Circle One</u>	<u>Phone No.</u>	<u>Cell No.</u>	<u>Alt Phone</u>
	Logging Projects All			
	Logging Projects All			
	Logging Projects All			
	Logging Projects All			
	Logging Projects All			
	Logging Projects All			
	Logging Projects All			

(8) Name of Subcontractors and Start Dates:

<u>Project No.</u>	<u>Subcontractor Name.</u>	<u>Start Date</u>	<u>Completion Date</u>	<u>Cell No.</u>	<u>Alt Phone</u>

	<u>Subcontractor Name.</u>	<u>Start Date</u>	<u>Cell No.</u>	<u>Alt Phone</u>
FELLING				
YARDING				

(9) Comments:

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

(10) Operations Map: Attach a copy of timber sale Exhibit A or other suitable map which plainly shows the items listed on the instruction sheet.



**Oregon Department of Forestry**

2600 State St Salem OR 97310

PART III: EXHIBITS

**EXHIBIT B**


**INSTRUCTION SHEET FOR OPERATIONS PLAN**

**SUBMIT ONE COPY OF PLAN STATE**

Operations shall be limited to the work shown in the plan until a revised plan or supplemental plan is submitted covering additional work. Compliance with this plan is not in lieu of compliance with any federal requirements related to the federal Endangered Species Act including without limitation PURCHASER'S independent obligation to avoid take of a T&E species and PURCHASER'S obligation to comply with terms and conditions of any incidental take Permit(s) that include required minimization and mitigation measures in any applicable Habitat Conservation Plan. If STATE has prepared a required Forest Practices Act (FPA) "Written Plan" for operations, PURCHASER shall comply with all provisions of the Written Plan.

**Explanation of Item No.(from Page 1)**

- (5) All sales require you to use a brand furnished by STATE. If the State brand has not been assigned when the plan is submitted, it will be furnished and assigned later. Complete drawing. If more than one brand is assigned to the sale, complete both drawings.
- (6) The contract requires you to have a designated representative available on the sale area or work location who is authorized to receive in your behalf any notice or instruction given by STATE and to take action in regard to performance under the contract. If logging and project work is widely separated, a representative is required for each.
- (7) The STATE representative will be designated when your plan is approved and is the person who will inspect and issue instructions regarding performance.
- (8) Show names of subcontractors to be used for any or all phases of the operations. If subcontractors are not Known, or are changed later, give notification to the STATE representative prior to commencement of work by subcontractor.
- (9) Show projected dates for commencement of both projects and logging. If projected dates need to be changed at a later date, notification must be given to the STATE representative by supplemental plan or otherwise, prior to commencement of such operations.
- (10) The STATE representative will furnish extra copies of Exhibit A of the contract for your use in preparing the operations map. The map shall use the following legend and show:
  1. Landing locations, approximate setting boundaries, and probable sequence of logging the settings. Number the settings in sequence.
  2. Locations of spur roads planned for construction, other than required by the timber sale contract. Provide spur road specifications
  3. Locations of proposed tractor yarding roads. Show if and how marked on the ground.
  4. Locations of temporary stream crossings.
  5. List the sequence of performing project work.
  6. Location of rock sources - attach pit development plans.

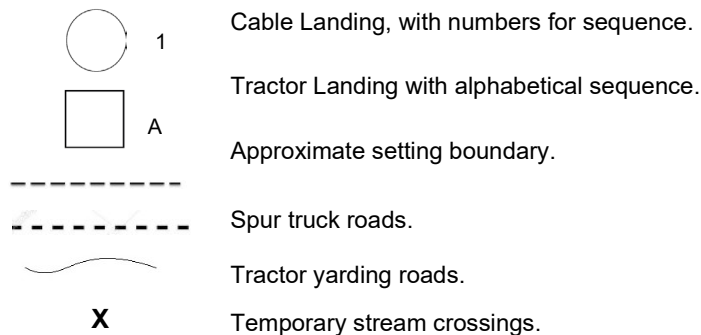




**Oregon Department of Forestry**  
 2600 State St Salem OR 97310  
 PART III: EXHIBITS  
**EXHIBIT B**  
**OPERATIONS PLAN**


**Completion Timeline**

Indicate on the appropriate timeline below, the dates by which you plan to complete the work as required under this contract. The purpose of this section is to develop a plan that will ensure you complete the work as required, and meet the interim completion date(s) and contract expiration date. This plan is incorporated and made a part of the contract. When, in the opinion of STATE, operations are not commencing in a manner that meets the intent of this plan, you may be placed in violation of contract and your operations suspended until an amended plan is submitted and approved by STATE.

Projects

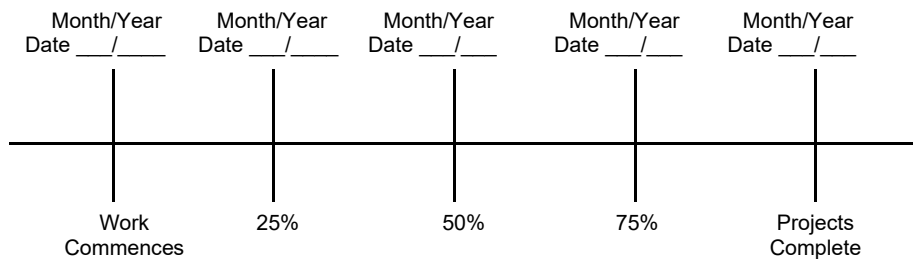

Harvest & Other Requirements

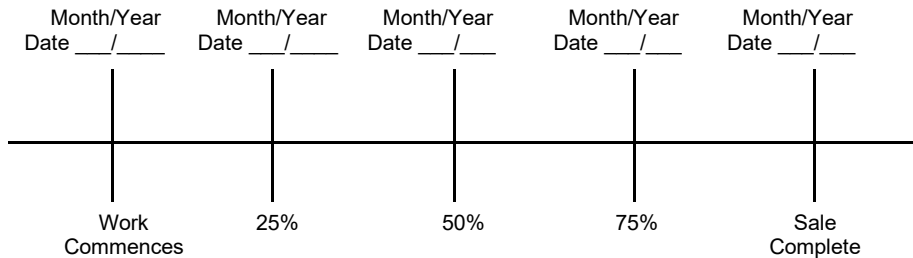

The Federal Endangered Species Act (ESA) prohibits a person from taking any federally listed threatened or endangered species. Taking under the federal ESA may include alteration of habitat. STATE's approval of this plan does not certify that PURCHASER's operation under the plan is lawful under the federal ESA or that the plan is consistent with the terms and conditions of any applicable incidental take Permit(s) including any required minimization and mitigation measures proposed in the applicable Habitat Conservation Plan. As provided in the timber sale contract, PURCHASER's must comply with all applicable state, federal, and local laws, including without limitation any Permit(s) issued thereunder.

PURCHASER's compliance with this plan is not in lieu of compliance with any federal requirements related to the federal Endangered Species Act.

APPROVED; Date: \_\_\_\_\_

SUBMITTED BY:  
PURCHASER

STATE OF OREGON - DEPARTMENT OF FORESTRY

\_\_\_\_\_  
Title \_\_\_\_\_

\_\_\_\_\_  
Title \_\_\_\_\_



**Oregon Department of Forestry**  
**EXHIBIT C - SAWMILL GRADE (WESTSIDE SCALE)**  
**SCALING INSTRUCTIONS - LOCATION APPROVAL - BRAND INFORMATION**  
**Tillamook - NWOA**

(1) ORIGINAL REGISTRATION  Date \_\_\_\_\_  
 REVISION NUMBER 000  Date \_\_\_\_\_  
 CANCELLATION  Date \_\_\_\_\_

(2) TO: \_\_\_\_\_  
 (Third Party Scaling Organization)

(3) FROM: Tillamook Phone (503) 842-2545  
 (State Forestry District)  
 Address: 5005 THIRD ST  
TILLAMOOK, OR 97141-2999

(4) PURCHASER: \_\_\_\_\_  
 Mailing Address: \_\_\_\_\_  
 \_\_\_\_\_  
 Phone Number: \_\_\_\_\_

(5) MINIMUM SCALING SPECIFICATIONS	
SPECIES	MINIMUM NET VOLUME
Conifers	10
Hardwoods	10

\*Apply minimum volume test to whole logs over 40' Westside

(6) WESTSIDE SCALE:  
 Use Region 6 actual taper rule. Logs over 40'.

(7) Weight Scale Sample      YES      NO  
                                     


(8) APPROVED SCALING LOCATIONS (as shown on the ODF Approved Locations web-site )	Species	Yard	Truck	Weight

(9) **SALE NAME:** North Miami  
 COUNTY: Tillamook

(10) **STATE CONTRACT NUMBER:**  
TL-341-2025-W00971-01

(11) **STATE BRAND REGISTRATION NUMBER:**  
 \_\_\_\_\_

(12) **STATE BRAND INFORMATION:**



(13) PAINT REQUIRED:      YES        
 COLOR: Orange

(14) SPECIAL REQUESTS      (Check applicable)	
PEELABLE CULL (all species).....	<input checked="" type="checkbox"/>
<b>NO DEDUCTIONS ALLOWED FOR MECHANICAL DAMAGE</b> .....	<input checked="" type="checkbox"/>
ADD-BACK VOLUME - Deductions due to delay...	<input checked="" type="checkbox"/>
OTHER :	

(15) **REMARKS:**  
 "Mule Trains"  
 1. Loads are required to have load tickets for each set of bunks.  
 2. If truck and pup are to be weighed, weigh and process separately for gross and tare weights.

Operator's Name (Optional inclusion by District): \_\_\_\_\_

(16) SIGNATURES:  
 \_\_\_\_\_  
 Purchaser or Authorized Representative      Date  
 \_\_\_\_\_  
 State Forester Representative      Date  
 \_\_\_\_\_  
 State Forester Representative PRINT NAME

**Notify the District within one hour when branding or painting is inadequate for quick identification, the receipts are missing, not correctly or completely filled out, and/or when logs presented for scaling are impossible to scale accurately.**  
 General Distribution: TPSO, Approved Scaling Locations and Purchaser.



**Oregon Department of Forestry**  
**EXHIBIT C - SAWMILL GRADE**  
**INSTRUCTIONS FOR EXHIBIT C**  
**Tillamook - NWOA**

(1) Check appropriate box. REVISION NUMBER requires comments. CANCELLATION requires logging and hauling to be complete, recall branding hammers.

(2) Designate Third Party Scaling Organization (TPSO).

Columbia River Log Scaling & Grading Bureau  
P.O.Box 7002, Eugene, OR 97401  
Phone: (541) 342-6007 Fax: (541) 342-2631  
Email: [services@crls.com](mailto:services@crls.com)

Pacific Rim Log Scaling Bureau, Inc.  
8288 28th Court North East, Lacey, WA 98516  
Phone: (360) 528-8710 Fax: (360) 528-8718  
Email: [office@prlsb.com](mailto:office@prlsb.com)

Mountain Western Log Scaling & Grading Bureau  
2560 NW Medical Park Drive, OR 97471  
Phone: (541) 673-5571 Fax: (541) 672-6381  
Email: [info@mwlsgb.com](mailto:info@mwlsgb.com)

Yamhill Log Scaling & Grading Bureau  
P.O.Box 709, Forest Grove, OR 97116  
Phone: (503) 359-4474 Fax: (503) 359-4476  
Email: [yamhilllog@frontier.com](mailto:yamhilllog@frontier.com)

Northwest Log Scalpers Inc.  
6137 NE 63rd St, Vancouver, WA, 98661  
Phone: (360) 553-7212 ext. 4 Fax:(360) 553-7213  
Email: [info@nwlogscalpers.com](mailto:info@nwlogscalpers.com)

(3) State District office, address and phone.

(4) Enter Purchaser's business name, address, and phone number as it appears on the Contract.

(5) Minimum Scaling Specifications.

(6) Westside - Region 6 actual taper segment scale. Check Yes or No. Special Service Rules on file with TPSO. See: Segment Scaling and Grading of Long Logs - All Species - State Forestry Department Scaling Practices (Westside).

(7) Weight Scale Sample - Check box if sale is to be a Weight Scale Sample. All specifics for handling, scaling and processing will be attached or explained in the Remarks section item (15).

(8) Show scaling locations only applicable to TPSO. Location name should appear as it does on the ODF Approved Scaling Location web site: [https://apps.odf.oregon.gov/Divisions/management/asset\\_management/scalinglocation.asp](https://apps.odf.oregon.gov/Divisions/management/asset_management/scalinglocation.asp) Locations with scaling and processing directions specific to their location should be on a separate form. Species should be identified if not capable of receiving "all" species. Check appropriate box for either: yard, truck scale, or weight. Refer to the web site listed above for the locations approval status.

(9) Enter sale name and county.

(10) Enter sale Contract number.

(11) Enter Oregon's State Brand Registry Number (**REQUIRED**).

(12) Show brand assigned to timber sale. One brand only. If more than one brand is assigned to the sale: (1) make a separate form for each brand and (2) on each form, explain and show other brand(s) in the Remarks section item (15).

(13) Check yes for Paint Required and designate "Orange" for color. Non required removal volumes may sometimes require blue paint.

(14) Special Requests. These are requests that will be applied to ODF timber sales. All boxes applicable to the timber sales designated in the Exhibit C form must be "marked". If "Other" is indicated, it must contain a description and any necessary comments.

(15) Use this space to designate any weight scale sample instructions or any other explanations to clarify scaling, processing and/or mailing requirements. If additional scaling locations are approved, revise original or current form showing all (old and new) locations. Check REVISION box at top of form and explain under remarks. Route as indicated.

(16) Require purchaser to sign and date completed form in addition to State Forester Representative, sign and print name on the form. Signatures not required on revisions.



**Oregon Department of Forestry  
 EXHIBIT C - PULP SORT  
 PROCESSING INSTRUCTIONS - LOCATION APPROVAL  
 BRAND INFORMATION**

Tillamook, NWOA

(1) ORIGINAL REGISTRATION  Date \_\_\_\_\_  
 REVISION NUMBER 000  Date \_\_\_\_\_  
 CANCELLATION  Date \_\_\_\_\_

(2) TO: \_\_\_\_\_  
 (Approved Pulp Processing Facility)

(3) FROM: Tillamook Phone (503) 842-2545  
 (State Forestry District)  
 Address: 5005 THIRD ST  
TILLAMOOK, OR 97141-2999

(4) PURCHASER: \_\_\_\_\_

(5) Scaling Bureau (TPSO) Processing Weight receipts:  
 \_\_\_\_\_

Mailing Address: \_\_\_\_\_

Phone Number: \_\_\_\_\_


(9) SALE NAME: North Miami

COUNTY: Tillamook

(10) STATE CONTRACT NUMBER:  
TL-341-2025-W00971-01

(11) STATE BRAND REGISTRATION NUMBER: \_\_\_\_\_

(12) STATE BRAND INFORMATION:



(13) REMARKS:  
 "Mule Trains"  
 1. Loads are required to have load tickets for each set of bunks.  
 2. Truck and pup are to be weighed and processed separately for gross and tare weights.

Operator's Name (Optional inclusion by District):  
 \_\_\_\_\_

(14) SIGNATURES:

\_\_\_\_\_  
 Purchaser or Authorized Representative Date

\_\_\_\_\_  
 State Forester Representative Date

\_\_\_\_\_  
 State Forester Representative PRINT NAME

(6) STATE Definition of Approved Pulp Sort:  
 • Top portion of the tree (tops).  
 • All logs with a diameter (Big End) greater than 8 inches marked with blue paint.

(7) PULP FACILITY PROCESSING INSTRUCTIONS:  
 • Pulp loads shall be weighed in lieu of scaling.  
 • One Ton = 2000 lbs (Short Ton).  
 • Pulp loads shall have a yellow Log Load Receipt attached.  
 • Gross weight and truck tare weight for each load shall be machine printed on the weight receipt.  
 • Weigher shall sign the weight receipt.  
 • Weigher shall record the Log Load Receipt number on the weight receipt.  
 • Weigher shall attach the Weight receipt to the Log Load Receipt and mail them weekly to the TPSO processing the Weight receipt.

(8) TPSO PROCESSING INSTRUCTIONS  
 • Submit data files daily (or each day of activity).  
 • Mail or deliver scale tickets weekly to ODF Headquarters in Salem.

**Notify the District within one hour when branding is inadequate for quick identification, the logs are marked with orange paint, the receipts are missing, not correctly or completely filled out, and/or logs do not meet the specifications of the STATE definition of Approved Pulp Sort.**

**General Distribution: TPSO, Approved Scaling Locations and Purchaser.**



## Oregon Department of Forestry EXHIBIT C - PULP SORT INSTRUCTIONS FOR EXHIBIT C

Tillamook, NWOA

- (1) Check appropriate box. REVISION NUMBER requires comments. CANCELLATION requires logging and hauling to be complete, recall branding hammers.
- (2) Approved Pulp Processing Facility. Write in as written in the Approved Log Delivery Location [https://apps.odf.oregon.gov/Divisions/management/asset\\_management/scalinglocation.asp](https://apps.odf.oregon.gov/Divisions/management/asset_management/scalinglocation.asp)
- (3) State District office, address and phone.
- (4) Enter Purchaser's business name, address, and phone number as it appears on the Contract.
- (5) Third Party Scaling Organization that will be processing the weight tickets, mailing address, and phone number.

Columbia River Log Scaling & Grading Bureau  
P.O.Box 7002, Eugene, OR 97401  
Phone: (541) 342-6007 Fax: (541) 342-2631  
Email: [services@crls.com](mailto:services@crls.com)

Pacific Rim Log Scaling Bureau, Inc.  
8288 28th Court North East, Lacey, WA 98516  
Phone: (360) 528-8710 Fax: (360) 528-8718  
Email: [office@prlsb.com](mailto:office@prlsb.com)

Mountain Western Log Scaling & Grading Bureau  
2560 NW Medical Park Drive, Roseburg, OR 97471  
Phone: (541) 673-5571 Fax: (541) 672-6381  
Email: [info@mwlsgb.com](mailto:info@mwlsgb.com)

Yamhill Log Scaling & Grading Bureau  
P.O.Box 709, Forest Grove, OR 97116  
Phone: (503) 359-4474 Fax: (503) 359-4476  
Email: [yamhilllog@frontier.com](mailto:yamhilllog@frontier.com)

Northwest Log Scalers Inc.  
6137 NE 63rd St, Vancouver, WA, 98661  
Phone: (360) 553-7212 ext. 4 Fax: (360) 553-7213  
Email: [info@nwlogscalers.com](mailto:info@nwlogscalers.com)

- (6) Big end of log is not to exceed 2 inches greater than the minimum removal specifications in the contract. Example: Minimum removal specifications 6 inches and 20 board feet, then the Big end of log not to exceed 8 inches. When conifer and hardwood removal specifications are different, use the smaller removal diameter to determine this specification.
- (9) Enter sale name and county.
- (10) Enter sale Contract number.
- (11) Enter Oregon's State Brand Registry Number **(REQUIRED)**.
- (12) Show brand assigned to timber sale. One brand only, if more than one brand is assigned to the sale: (1) make a separate form for each brand and (2) on each form, explain and show other brand(s) in the Remarks section Item (13).
- (13) Use this section to list any special instructions or the reason for any revisions in section item (1).
- (14) Require purchaser to sign and date completed form in addition to State Forester Representative, sign and print name on the form. Signatures not required on revisions.

EXHIBIT D

FOREST ROAD SPECIFICATIONS

POINT TO POINT	STATION TO STATION	SUBGRADE WIDTH (feet)	SURFACE WIDTH (feet)	DRAINAGE	DITCH SHAPE	DITCH DEMINIONS (WIDTH X DEPTH) (feet)
A to B	0+00 to 109+55	-	14	Ditch	V	3X1
A to B	109+55 to 114+30	-	14	Outslope	-	-
A to B	114+30 to 128+60	-	14	Ditch	V	3X1
A to B	128+60 to 131+30	-	14	Outslope	-	-
A to B	131+30 to 387+25	-	14	Ditch	V	3X1
A to B	387+25 to 410+60	-	12	Ditch	V	3X1
A to B	410+60 to 413+10	-	12	Outslope	-	-
A to B	413+10 to 434+15	-	12	Ditch	V	3X1
A to B	434+15 to 450+15	-	12	Outslope	-	-
A to B	450+15 to 458+10	-	12	Ditch	V	3X1
A to B	458+10 to 467+10	-	12	Outslope	V*	3X1*
A to B	467+10 to 525+00	-	12	Ditch	V	3X1
C to D	0+00 to 207+00	-	12	Existing	V	3X1
E to F	0+00 to 19+35	-	12	Existing	-	-
I to J	0+00 to 3+40	14	12	Outslope	-	-
K to L	0+00 to 19+65	-	12	Existing	V	3X1
K to L	19+65 to 20+80	-	12	Outslope	-	-
K to L	20+80 to 28+10	-	12	Existing	V	3X1
K to L	28+10 to 29+00	-	12	Outslope	-	-
K to L	29+00 to 39+80	-	12	Existing	V	3X1
K to L	39+80 to 40+85	-	12	Outslope	-	-
K to L	40+85 to 137+00	-	12	Existing	V	3X1
K to L	137+00 to 141+40	-	12	Outslope	-	-
K to L	141+40 to 254+30	-	12	Existing	V	3X1
K to L	254+30 to 263+20	-	12	Outslope	-	-
K to L	263+20 to 289+05	-	12	Existing	V	3X1
K to L	289+05 to 297+85	-	12	Outslope	-	-
K to L	297+85 to 310+30	-	12	Existing	V	3X1
K to L	310+30 to 312+55	-	12	Outslope	-	-

EXHIBIT D

FOREST ROAD SPECIFICATIONS

K to L	312+55 to 323+60	-	12	Existing	V	3X1*
K to L	323+60 to 324+80	-	12	Outslope	-	-
K to L	324+80 to 347+55	-	12	Existing	V	3X1
K to L	347+55 to 390+65	-	12	Outslope	-	-
M to N	0+00 to 1+90	16	12	Outslope	-	-
O to P	0+00 to 14+20	14	12	Outslope	-	-
Q to R	0+00 to 4+10	16	12	Outslope	-	-
S to T	0+00 to 2+60	16	12	Outslope	-	-

\* = Clean ditchlines in this section of road

**CLEARING.** This work shall consist of clearing, removing, and disposing of all trees, snags, down timber, brush, surface objects, and protruding obstructions within the clearing limits. Trees outside the clearing limits shall not be felled unless approved in writing by STATE. All danger trees, leaners, and snags outside the clearing limits which could fall and hit the road shall be felled. Where clearing limits have not been marked, clearing limits shall be as follows:

- Construction – 10 feet back from the top of the cut slope and 5 feet back from the toe of fill slopes.
- Improvements and reconstructions - 10 feet back from the shoulder of the subgrade or the ditch, whichever is widest.

**GRUBBING.** This work shall consist of the removal or digging out of stumps and protruding objects. All stumps shall be completely removed within the limits of required grubbing. Stumps overhanging cutslopes shall be removed. Grubbing limits shall be as follows:

- Construction - From the top of the cutslope to the toe of the fill.
- Improvements and reconstructions - 4 feet back from the shoulder of the subgrade or the ditch, whichever is widest.
- Sidecast pullback – From top of pullback to toe of pullback.

**CLEARING AND GRUBBING DISPOSAL.** Clearing and grubbing debris shall not be placed or permitted to remain in or under any road embankment sections. Clearing and grubbing debris shall not be left lodged against standing trees. Clearing and grubbing debris may be scattered through openings in the timber outside of the cleared right-of-way, except for the following areas where debris shall be fully contained and hauled to a designated waste area:

- Where end-haul is required
- On side slopes exceeding 55 percent
- On unstable areas
- In any stream channel (Type F, N or D) or where material may enter the stream channel.
- Grubbed stumps from cable landing construction, reconstruction

Clearing, grubbing, and associated disposal shall be completed prior to subgrade approval.

EXHIBIT D

FOREST ROAD SPECIFICATIONS

EXCAVATION. Excavation and grading shall not be done when weather and/or ground conditions are such that damage will result to existing subgrade or cause excessive erosion.

Excavation shall conform to STATE-specified lines, grades, dimensions, and plans when provided.

Suitable excavated material shall be used for the formation of fills, shoulders, and drainage structure backfills. Embankment materials shall be free of woody debris, brush, muck, sod, frozen material, and other deleterious materials. All fills and drainage structure backfills shall be machine compacted according to the "Compaction and Processing Requirements" in Exhibit E.

Unless road plans show otherwise, all roads shall be on a balanced cross section, except when the slope is over 55 percent, the road shall be on full bench for the width specified.

Sidecast includes any road generated excess excavation material which is not essential as part of the road prism, is not compacted, and is below the roadway. Sidecast shall not be placed where it will enter a stream course or where material will accumulate in areas deemed a high landslide hazard location by STATE. Leaving sidecast below the road is only permissible if specifically allowed in "Full Bench and End Haul Requirements" in this Exhibit.

All bank excavation and sidecast pullback on a project road segment shall be completed prior to subgrade approval.

ROAD WIDTH LIMITATIONS. PURCHASER shall obtain advance written approval from STATE to construct the road to a greater width than specified. Extra subgrade width shall be required for:

Fill Widening. Add to each fill shoulder 1 foot for fills 3 feet to 6 feet high; 2 feet for fills over 6 feet high.

Curve Widening. Widen the inside shoulder of all curves as specified in the road plans or as follows: 400 divided by the radius of the curve equals the amount of extra width.

DRAINAGE

Ditch. Construct ditch as specified in Exhibit D. Subgrade shall be crowned at 4 to 6 percent. Construct ditchouts away from subgrade at locations marked in the field or as directed by STATE.

Outslope. Road subgrade shall be outsloped at 4 to 6 percent.

Existing. Road subgrade and drainage shall be maintained in its current configuration, outsloped where outsloped, and ditched where ditched

TURNOUTS. Increase roadbed width an additional 8 feet for both subgrade and surfacing. Length shall be at least 25 feet, or as staked on the ground, plus 25-foot approaches at each end.

Location: Intervisible but not greater than 750 feet apart.

SLOPES

Rock  
Common

Back Slopes  
Vertical to 1/4 :1  
3/4 :1

Fill Slopes  
Not Steeper  
Than 1 1/2: 1

Top of cutslopes shall be rounded.

LANDINGS. Landings shall be constructed as posted in the field, no less than 50 feet wide and no more than 70 feet wide unless otherwise approved by STATE. Surface is to be crowned for drainage with general grade no more than 4 percent and no less than 2 percent. All cuts shall be ditched. Surface the landing as shown in the "Road Surfacing" table in Exhibit E. Deposit stumps associated with landing construction/reconstruction at the designated waste area.

TURNAROUNDS. Increase subgrade width an additional 30 feet for a length of 16 feet with 20' radius returns at locations marked in the field.

SEASONAL WINTERIZATION. All unsurfaced roads or unfinished subgrades shall be waterbarred in accordance with the specifications in Exhibit H, and blocked from vehicular traffic prior to October 31, annually and as directed by STATE.

EXHIBIT D

FOREST ROAD SPECIFICATIONS  
ADDITIONAL ROAD INSTRUCTIONS

A to B: At station 11+65, cut culvert approximately 2ft from road edge and remove the cut off section from State land.

Remove bank sluff in ditch at station 111+50. Endhaul piled waste in turnout at station 412+55.

Excavate culvert at station 285+85, relay it 3ft deeper, and add 10ft section as per Exhibit G.

Construct or clean existing ditches with an excavator where they do not meet the specifications in Exhibit D, spread and compact. Where side slopes are greater than 55%, endhaul to designated waste area, spread and compact. Clean culverts and install approximately 5 culvert markers at culvert locations where markers are missing or damaged. Construct or clean ditchouts where necessary.

Special Ditching instructions:

56+05 to 60+50**	143+55 to 146+05#	212+65^		
------------------	-------------------	---------	--	--

\*\* = Realign ditch to drain into inlet. # = Ditch 150ft down road ^ = Ditch 50ft up spur

Remove stumps from road prism at stations 500+35, 504+85, and 516+30.

Remove flume from culvert at station 316+35 and replace with rip rap as per Exhibit E

Pullback the existing sidecast between the following stations, according to specifications in Exhibit J and as marked in the field. Haul material to designated waste area, spread and compact.

From Station	To Station	Depth(ft)	Width(ft)
10+85	12+00	2	0.5
136+60	136+90	12	6
137+40	138+15	20	20
140+50	140+85	15	5
144+60	145+10	20	5
296+50	297+00	20	2
411+10	411+75	8	3
461+85	462+05	8	6
463+20	463+60	4	2
468+80	469+45	9	3
490+00	490+50	8	2
501+30	501+70	12	2

Widen road into the cutbank as marked in the field and as directed by State.

From Station	To Station	Distance Into Cutbank(ft)
410+60	412+15	3
502+30	503+25	10
524+10	525+00	8

C to D: Construct or clean existing ditches with an excavator between the following road stations to meet the specifications in Exhibit D. Endhaul material to designated waste area, spread and compact.

204+10 to 207+00

Clean culverts and install approximately 11 culvert markers at culvert locations where markers are missing or damaged.

E to F: Clear and grub turnaround at station 12+00.

Remove all vegetative material from landing at station 19+35 and endhaul to Waste Area #9.

EXHIBIT D

FOREST ROAD SPECIFICATIONS  
ADDITIONAL ROAD INSTRUCTIONS

I to J: Construct fill between stations 0+25 and 1+00 in accordance with Exhibit E and as directed by State, using waste material from segment A to B.

K to L: Between stations 157+05 and 157+60, construct fill reinforcement wall as per Exhibit O by removing material to construct a 12ft wide X 35ft long level pad for rip rap to be placed on and sloping excavation at a ½:1 slope back up to the road. Endhaul material to designated waste area, spread and compact. Replace material removed with a rip rap wall and backfill with pitrun as directed by State and as marked in the field to the level of the road. No work in the stream is allowed.

Remove bank sluff in ditch at station 34+45 and remove material in road at station 369+85.

Remove stumps from road prism at stations 350+80, and 369+85.

Excavate entire road between stations 186+30 and 186+75 and endhaul material. Reconstruct road in accordance with Exhibits E and G, and using fill reinforcement as per Exhibit O. Fall two trees onsite marked with red & white stripped flagging.

Construct or clean existing ditches with an excavator where they do not meet the specifications in Exhibit D, spread and compact. Where side slopes are greater than 55%, endhaul to designated waste area, spread and compact. Clean culverts and install approximately 5 culvert markers at culvert locations where markers are missing or damaged. Construct or clean ditchouts where necessary.

Pullback the existing sidecast between the following stations, according to specifications in Exhibit J and as marked in the field. Haul material to designated waste area, spread and compact.

From Station	To Station	Depth(ft)	Width(ft)
265+60	266+80	9	4

Grub all stumps within 10ft of road edge between stations 376+55 and 390+65.

Widen road or remove sluff between stations 265+60 and 360+20 where subgrade and ditch do not meet specifications in Exhibit D.

Starting at station 353+25, pluck trees along road right-of-way and remove vegetative material on running surface, and endhaul to Woody Debris Waste Area at station 368+70 or Waste Area #24.

Construct minimum 70ft landing at station 390+65.

M to N: Pluck trees along road right-of-way and remove vegetative material on running surface. Dispose of by endhauling or piling.

O to P: Construct turnout at station 7+70.

Widen road between stations 8+00 and 14+20 where subgrade does not meet specifications in Exhibit D and endhaul to Waste Area #25.

Construct minimum 70ft landing at station 14+20.

Q to R: Remove stumps larger than 12in within 10ft of road edge.

Construct minimum 70ft landing at station 4+10.

S to T: Construct minimum 70ft landing at station 2+60.

EXHIBIT D  
FULL BENCH AND END-HAUL REQUIREMENTS

POINT TO POINT	STA. TO STA.
A to B	0+00 to 22+45
A to B	46+95 to 194+35
A to B	195+75 to 253+40
A to B	259+65 to 282+60
A to B	283+20 to 343+65
A to B	363+10 to 497+60
A to B	501+30 to 519+45
A to B	524+10 to 525+00
C to D	All

POINT TO POINT	STA. TO STA.
E to F	16+30 to 19+35
K to L	14+15 to 252+20
K to L	255+85 to 302+15
K to L	311+00 to 313+50
K to L	335+80 to 342+00
K to L	347+55 to 379+10
K to L	387+05 to 390+40
O to P	0+00 to 14+20

Full Bench and End-Haul Areas General Requirements

Sidecast includes any road generated excess excavation material which is not essential as part of the road prism, is not compacted, and is below the roadway. Material shall not be sidecast unless specified above.

Clearing and grubbing debris shall be end-hauled.

When controlled blasting is required, it shall be accomplished using timing devices, delayed charges, low intensity shots, or other suitable means to contain material within the road prism.

Containment/Sidecast

Full Containment: Sidecast material lost over the outside edge of the road shall not exceed 6 inches in depth, measured perpendicular to the natural ground slope. Pioneer excavation shall be removed by digging, loading, and hauling rather than by pushing or scraping methods.

Tree bases and stumps may have up to 12 inches of material directly above them. Any amount of material exceeding the containment requirements shall be removed by whatever means necessary and end-hauled to a designated waste area.

Waste Area Location

- (1) As shown on Exhibit A and as marked in the field.
- (2) Setback from slope break shall be a minimum of 20 feet horizontal measurement.

Waste Area Treatment

- (1) Deposit at waste area, spread evenly, compact, and provide adequate drainage.
- (2) Pile woody debris separate from other waste material.
- (3) Mulch and seed all waste areas in accordance with Exhibit N.
- (4) No trees shall be felled in waste areas outside of the timber sale boundaries.
- (5) Waste shall have a maximum limit as specified:

Waste Area	Max Volume (cy)
#3	500
#8	500
#11	200

EXHIBIT E

ROAD SURFACING

ROAD SEGMENT:		A to B		STATIONS:		0+00		to		525+00	
Application	Rock Size and Type	Location	Approx. Total (CY)								
Spot Rock	Crushed 1 1/2"-0"	298+30	30								
18" Culvert Backfill/Bedding	Crushed 2 1/2"-0"	20yds/ culvert	140								
18" Energy Dissipator	Rip Rap 12"-6"	5yds/Culvert	35								
24" Culvert Backfill/Bedding	Crushed 2 1/2"-0"	20yds/ culvert	20								
24" Energy Dissipator	Rip Rap 12"-6"	5yds/Culvert	15								
Culvert Backfill/Bedding	Crushed 2 1/2"-0"	276+65	30								
Culvert Backfill/Bedding	Crushed 2 1/2"-0"	285+85	30								
Culvert Backfill/Bedding	Crushed 2 1/2"-0"	314+35	30								
Landing Rock	Jawrun 3"-0"	502+80	25								
Landing Rock	Jawrun 3"-0"	525+00	10								
Energy Dissipator	Rip Rap 12"-6"	303+80	10								
Spot Rock	Crushed 1 1/2"-0"	As Directed	300								
Leveling Rock	Crushed 2 1/2"-0"	As Directed	100								
Energy Dissipator	Rip Rap 12"-6"	316+35	10								
Spot Rock	Crushed 2 1/2"-0"	298+30	100								

ROAD SEGMENT:		C to D		STATIONS:		0+00		to		207+00	
Application	Rock Size and Type	Location	Approx. Total (CY)								
Spot Rock	Crushed 2 1/2"-0"	0+00 - 113+10	50								

ROAD SEGMENT:		E to F		STATIONS:		0+00		to		19+35	
Application	Rock Size and Type	Location	Approx. Total (CY)								
Spot Rock	Crushed 2 1/2"-0"	As Directed	100								
Turnaround	Jawrun 3"-0"	12+00	30								
Landing Rock	Jawrun 3"-0"	19+35	80								

ROAD SEGMENT:		I to J		STATIONS:		0+00		to		3+40	
Application	Rock Size and Type	Location	Compacted Depth	Volume (CY) per	Number of Units	Curve Widening (CY)	Approx. Total (CY)				
Road Rock	Jawrun 3"-0"	0+00 to 3+40	9 "	station	50	3.40	10	180			
Application	Rock Size and Type	Location	Approx. Total (CY)								
Approach Widening	Jawrun 3"-0"	0+00	30								
Landing Rock	Jawrun 3"-0"	3+40	60								

EXHIBIT E

ROAD SURFACING

ROAD SEGMENT:		K to L		STATIONS:			0+00		to 390+65	
Application	Rock Size and Type	Location		Compacted Depth	Volume (CY) per		Number of Units	Curve Widening (CY)	Approx. Total (CY)	
Road Rock	Crushed 1 1/2"-0"	292+95 to 376+55		4 "	station	20	83.60	80	1,750	
Road Rock	Pitrun 6"-0"	353+25 to 390+65		12 "	station	65	37.40	90	2,540	
Turnouts	Crushed 1 1/2"-0"	K to L		4 "	TO	10	12		120	
Turnouts	Pitrun 6"-0"	K to L		12 "	TO	30	5		150	
Application	Rock Size and Type	Location		Approx. Total (CY)						
Spot Rock	Crushed 1 1/2"-0"	As Directed		500						
Culvert Backfill/Bedding	Crushed 1 1/2"-0"	20yds/ culvert		160						
Energy Dissipator	Rip Rap 12"-6"	5yds/Culvert		40						
Fill Repair	Pitrun 6"-0"	157+05		160						
Fill Armor	Rip Rap 48"-24"	157+05		80						
Fill Repair	Pitrun 6"-0"	186+30		565						
Fill Armor	Rip Rap 48"-24"	186+30		200						
Widening	Pitrun 6"-0"	265+60		10						
Widening	Pitrun 6"-0"	353+25		25						
Widening	Pitrun 6"-0"	357+55		70						
Landing Rock	Pitrun 6"-0"	390+65		80						

ROAD SEGMENT:		M to N		STATIONS:			0+00		to 1+90	
Application	Rock Size and Type	Location		Approx. Total (CY)						
Approach Widening	Pitrun 6"-0"	0+00		50						

ROAD SEGMENT:		O to P		STATIONS:			0+00		to 14+20	
Application	Rock Size and Type	Location		Compacted Depth	Volume (CY) per		Number of Units	Curve Widening (CY)	Approx. Total (CY)	
Road Rock	Pitrun 6"-0"	0+00 to 14+20		12 "	station	65	14.20	50	970	
Turnouts	Pitrun 6"-0"	O to P		12 "	TO	30	2		60	
Application	Rock Size and Type	Location		Approx. Total (CY)						
Approach Widening	Pitrun 6"-0"	0+00		60						
Landing Rock	Pitrun 6"-0"	14+20		70						

EXHIBIT E  
ROAD SURFACING

ROAD SEGMENT:		Q to R		STATIONS:			0+00	to	4+10
Application	Rock Size and Type	Location	Compacted Depth	Volume (CY) per		Number of Units	Curve Widening (CY)	Approx. Total (CY)	
Road Rock	Pitrun 6"-0"	0+00 to 4+10	12 "	station	66	4.10	20	290	
Application	Rock Size and Type	Location	Approx. Total (CY)						
Approach Widening	Pitrun 6"-0"	0+00	30						
Landing Rock	Pitrun 6"-0"	4+10	80						

ROAD SEGMENT:		S to T		STATIONS:			0+00	to	2+60
Application	Rock Size and Type	Location	Compacted Depth	Volume (CY) per		Number of Units	Curve Widening (CY)	Approx. Total (CY)	
Road Rock	Pitrun 6"-0"	0+00 to 2+60	12 "	station	65	2.60	10	180	
Turnarounds	Pitrun 6"-0"	0+00	12 "	TA	40	1	40		
Application	Rock Size and Type	Location	Approx. Total (CY)						
Approach Widening	Pitrun 6"-0"	0+00	30						
Landing Rock	Pitrun 6"-0"	1+40	60						

TOTAL ROCK	48"-24" Rip rap	12"-6" Rip Rap	6"-0" Pitrun	3"-0 Jawrun	2 1/2"-0 Crushed	1 1/2"-0 Crushed
9,785CY	280CY	110CY	5,520CY	415CY	600CY	2,860CY

EXHIBIT E  
ROAD SURFACING

Roads shall be uniformly graded and approved by STATE prior to rocking.  
 Additional rock for curve widening is required and has been included in the volume estimates.  
 Turnouts, turnarounds, landings and junctions shall be rocked concurrently with the road.  
 End-dumping of riprap shall not be allowed, unless otherwise approved in writing by STATE.  
 Any additional turnarounds or turnouts created during any operation associated with this timber sale shall be rocked at PURCHASER's expense and as instructed by STATE.

For typical cross section, turnout and turnaround see Forestry Department Drawing Nos. 351-C, 351-D and TOTA-1 at the Forestry Department district office.

Materials. The material shall be fragments of rock crushed to the required size. The material shall be free from vegetation and lumps of clay. STATE may require screening and/or rejecting of materials utilized for the purpose of removing excess fine material. Excess fines are present, when greater than 5 percent of a total rock sample weight, passes a #200 sieve. River gravel shall not be used.

Sieve size	Percent Passing	
	1.5 inch	2½ inch
4	--	--
3	--	100
2.5	--	60-100
2	100	--
1.5	95-100	50-70
1.25	--	--
1	--	30-50
¾	55-90	0-16
¼ or #4	35-50	0-5
#10	15-35	
#40	5-20	

<u>For 6"-0" Pitrun</u>	Passing	10" sieve	100%
	Passing	6" sieve	60-85%
	Passing	3" sieve	30-50%
	Passing	¼ " sieve	10% maximum

For 12"-6" Rip rap 50 percent or more of the material shall measure at least 12 inches in one dimension. Material shall be clean, well graded, and free of 2"-0" fines.

For 48" – 24" Rip rap 50% or more of the rock shall be at 48 inches in one dimension. 100% of the rock shall be at least 24 inches in one dimension.

Control of rip rap and pitrun gradation shall be by visual inspection by STATE. Pitrun shall be reasonably free of organic material and shall not contain an excessive amount of oversized (cobbles or boulders) or undersized (clay, silt or sand) particles.

The referenced sieve shall have square openings as set forth in AASHTO M 92, Woven Cloth Series. The determinations of size and gradings shall be as set forth in AASHTO T 27.

## EXHIBIT E

### ROCK ACCOUNTABILITY

PURCHASER shall obtain subgrade approval from STATE prior to rocking. Rocking shall be limited to periods when weather conditions are acceptable to STATE and when sediment will not enter streams. Additional surfacing needed because of construction season or construction practice is not included in the preceding ROAD SURFACING table, and shall be furnished at PURCHASER expense.

Rock accountability shall be determined by depth measurement. STATE shall be given 24 hours' notice prior to rocking.

Depth Measurement. Rock shall be spread and compacted according to the depths specified in Exhibit E. Truck measure volumes are given, but shall not limit the amount of rock spread. Depth shall be determined in the most compacted area of the surface cross section. The depth of compacted aggregates shall not vary more than 1 inch from the depth specified in the "Road Surfacing" table in Exhibit E. The average depth for each road segment shall be the specified depth or greater. If additional rock is required because of insufficient depth, the locations and volumes to be added shall be determined by STATE. The conversion from compacted yardage to truck yardage is 1.3 multiplied by the compacted yardage equals truck yardage

Landings, Junctions, Turnouts, Turnarounds, and Heliports shall have a minimum rock volumes as shown in Exhibit E and visual inspections by STATE.

Curve Surfacing. Extra surface width shall be required for the inside of all curves as follows: 400 divided by the radius of the curve equals the amount of extra width to be surfaced at the depths shown in Exhibit E.

Load Records. Notify STATE before spreading the rock and maintain a record of all rock delivered for spreading. Make the record available for STATE inspection. A report listing the amount of rock delivered must be submitted no later than the 15th of each month.

EXHIBIT E

COMPACTION AND PROCESSING REQUIREMENTS

**Moisture Content:** Compaction must take place when moisture content of the materials being compacted is favorable for effective compaction as determined by STATE.

**Compaction Pass:** A pass is defined as traveling a road section forward and then backward over that same section.

**Subgrade.** Subgrade surfaces of the road segments listed below shall be graded and compacted prior to rocking. Compaction shall be accomplished by traveling all surfaces from shoulder to shoulder until the surface is smooth and hard and visible deformation ceases. At least 3 passes shall be made over the entire width and length of the road. Compaction shall be accomplished by using one or more of the approved equipment options listed below:

Subgrade shall be crowned or outsloped at 4 to 6 percent as specified in the “Forest Roads Specifications” table in Exhibit D.

ROAD SEGMENT	COMPACTION EQUIPMENT OPTIONS
I to J, S to T	Vibratory Roller

**Fills.** Embankments and fills shall be placed in approximately horizontal layers not more than 8 inches in depth. Each layer shall be separately, and thoroughly, compacted. Compaction equipment shall be operated over the entire width of each layer until visible deformation of the layers ceases. At least 3 passes shall be made over the entire width and length of each layer.

Placing individual rocks or boulders with more depth than the allowed layer thickness shall be permitted, provided the embankment will accommodate them. Such rocks and boulders shall be at least 6 inches below the subgrade. They shall be carefully distributed and the voids filled with finer material, forming a dense and compacted mass. Compaction shall be accomplished by using one or more of the approved equipment options listed below:

ROAD SEGMENT	COMPACTION EQUIPMENT OPTIONS
Culvert Backfills	Vibratory Hand-Operated or Backhoe-Mounted Tamper
All Other Fills	Vibratory Roller

**Pitrun Rock.** Pitrun surfacing rock shall be spread on roads with a crawler tractor and continuously walked-in. Rock spreading shall begin at nearest point from the rock source and progress toward the end of the project, unless otherwise approved in writing by STATE. Compaction shall be accomplished by using the approved equipment listed below or others approved by STATE:

Rock shall be compacted and processed during the same project period it is spread, unless otherwise approved in writing by STATE.

Rock shall be crowned or outsloped at 4 to 6 percent as specified in the “Forest Roads Specifications” table in Exhibit D.

ROAD SEGMENT	COMPACTION EQUIPMENT OPTIONS
All	Crawler Tractor

EXHIBIT E

COMPACTION AND PROCESSING REQUIREMENTS

Crushed Rock. The rock shall be uniformly mixed and spread in layers on the approved roadbed. Each layer of crushed rock shall be moistened or dried to uniform moisture content suitable for maximum compaction and compacted in layers not to exceed 6 inches in depth. When more than 1 layer is required, each shall be shaped, compacted, and approved by STATE before the succeeding layer is placed. Any irregularities or depressions that develop during compaction of the top layer shall be corrected by loosening the material at these places and adding or removing material until the surface is smooth and uniform. Each layer shall be compacted with a minimum of 3 passes over the entire width and length of the road until the surface is smooth and hard and visible deformation ceases. Compaction shall be accomplished by using one or more of the approved equipment options listed below:

Rock shall be compacted and processed during the same project period it is spread, unless otherwise approved in writing by STATE.

Rock shall be crowned or outsloped at 4 to 6 percent as specified in the "Forest Roads Specifications" table in Exhibit D.

ROAD SEGMENT	COMPACTION EQUIPMENT OPTIONS
All	Vibratory Roller

Existing Crushed Rock. The existing rock shall be unearthed to a minimum depth of 4 inches or to 1 inch below the bottom of potholes, whichever is greater. The existing rock shall then be uniformly mixed and moistened or dried to a uniform moisture content suitable for maximum compaction and compacted. Any irregularities or depressions that develop during compaction shall be corrected by loosening the material at these places and adding or removing material until the surface is smooth and uniform. The existing rock shall be compacted with a minimum of 3 passes over the entire width and length of the road. Compaction shall be accomplished by using the approved equipment listed below or others approved by STATE:

Existing crushed rock shall be compacted and processed after completion of all project work and log hauling, unless otherwise approved in writing by STATE.

Rock shall be crowned or outsloped at 4 to 6 percent as specified in the "Forest Roads Specifications" table in Exhibit D.

ROAD SEGMENT	COMPACTION EQUIPMENT OPTIONS
All	Vibratory Roller

## EXHIBIT E

### COMPACTION EQUIPMENT OPTIONS

Vibratory Rollers. The drum shall have a smooth surface, a diameter not less than 48 inches, a width not less than 58 inches, and a turning radius of 15 feet or less. Vibration frequency shall be regulated in steps to 1400, 1500, and 1600 VPM, corresponding to engine speeds of 1575, 1690, and 1800 RPM. The centrifugal force developed shall be 7 tons at 1600 VPM. It shall be activated by a power unit of not less than 25 horsepower. The vibratory roller shall be self-propelled and operated at speeds ranging from 0.9 miles to 1.8 miles per hour, as directed by STATE.

Tampingfoot Compactors. Tampingfoot compactors shall exert a minimum pressure of 250 pounds per square inch on the ground area in contact with the tamping feet. The compactor shall cover a minimum width of 60 inches per pass and weigh a minimum of 16,000 pounds.

Vibratory Hand-Operated or Backhoe-Mounted Tamper. Vibratory hand-held or hydraulic tampers shall be used for compaction of backfill materials around culverts (and/or bridge approach embankment materials around abutments). The tamper shoe dimensions shall be a minimum of 10" X 13" and capable of a centrifugal force of 2,250 pounds.

Crawler Tractors. A dozer/track-type tractor weighing a minimum of 45,000 pounds as directed by STATE shall be operated over the pit-run or jaw-run rock so that the entire surface comes in contact with the tracks.

## EXHIBIT F

### ROCK QUARRY DEVELOPMENT AND USE

1. PURCHASER shall prepare a written development plan for the quarry area. The plan shall be submitted to STATE for approval prior to conducting any operation in quarry area. The plan shall include, but not be limited to:
  - (a) Location of quarry floor, benches, and roads to benches.
  - (b) Disposal site for woody debris, overburden and reject material.
  - (c) Time lines for rock quarry use.
  - (d) Erosion control measures.
  - (e) Oversize material location
2. PURCHASER shall schedule and coordinate quarry and stockpile usage with other existing or planned activity requiring quarry or stockpile usage. **PURCHASER shall notify STATE 5 days prior to the start of quarry development activities.**
3. Fall all timber within the posted right-of-way boundary and remove all merchantable timber. All woody debris, including stumps and slash shall be hauled to the designated disposal areas.
4. Where overburden removal limits have not been marked, they shall extend for a distance of at least 20 feet beyond the developed rock source. Overburden removal limits, when marked, are designated by orange right-of-way boundary tags. Overburden shall be hauled to a designated waste area. Overburden shall be spread evenly, grass seeded, and compacted at the waste area and woody debris stacked separately. Areas of overburden removal shall be inspected for completeness and approved by STATE prior to drilling or rock removal.
5. PURCHASER shall conduct the Operations relative to the disposal of waste material in such manner that silt, rock, debris, dirt, or clay shall not be washed, conveyed, or otherwise deposited in any stream. All waste shall be deposited at an approved "waste disposal site."
6. The quarry floor shall be developed to provide drainage away from the quarry. All quarry and stockpile site drainage ditches shall be developed and maintained. Drainage ditches shall not discharge into streams.
7. Benches shall be constructed and maintained at intervals of 40 feet or less in height and shall be a minimum of 20 feet in width. Any gravel or talus slopes shall be left with a working face at an angle of 60 percent or less. There shall be a minimum of one bench with an access road to it. Said bench shall be easily accessible with tractors.
8. The STATE shall be notified two working days prior to the beginning of drilling operations. Working days shall be defined as Monday through Friday, 6:00 a.m. to 2:30 p.m.
9. Controlled blasting techniques shall be utilized for any blasting operations, and shall be accomplished using timing devices, delayed charges, low intensity shots, or other suitable means to contain as much material as possible within the quarry development area (full containment). Each low intensity shot shall be shot into the previous shots' void in order to contain all the material in the quarry development area. Each shot shall also have a "tattle-tale" end cap so that it is known if all charges were detonated. The purchaser shall detonate or remove all non-detonated explosives from STATE LANDS. PURCHASER shall maintain a comprehensive blasting log that contains all pertinent data for all blasting operations. The blasting log shall be submitted to the STATE after the completion of all blasting activity. The blasting log is intended for STATE record keeping purposes only.
10. Quarry face shall be developed in a uniform manner. All quarry backslopes shall be left in a stable condition.

## EXHIBIT F

### ROCK QUARRY DEVELOPMENT AND USE

11. Oversized material that is produced shall be piled in the vicinity of the quarry as directed by STATE.
12. Oversized material that is produced or encountered during development shall be broken down and utilized for crushing.
13. The quarry site shall be left in a condition free from overburden and debris. Access roads to the quarry, benches, and the quarry floor shall be cleared of unused shot rock and dirt at the termination of use. Access roads shall be waterbarred to provide drainage as specified in Exhibit H and blocked as directed by STATE. Unused shot rock material that is produced shall be piled in the vicinity of the quarry as directed by STATE. Dirt, overburden, and reject material shall be hauled to designated waste area.
14. Proper winterization and storm-water control measures such as waterbarring, drainage, utilization of filter bales, mulching and/or blocking access shall be constructed and maintained to protect the watershed and Project Work, as directed by STATE.
15. Apply grass seed to the waste area, as specified in Exhibit N.

EXHIBIT F  
ROCK QUARRY DEVELOPMENT AND USE

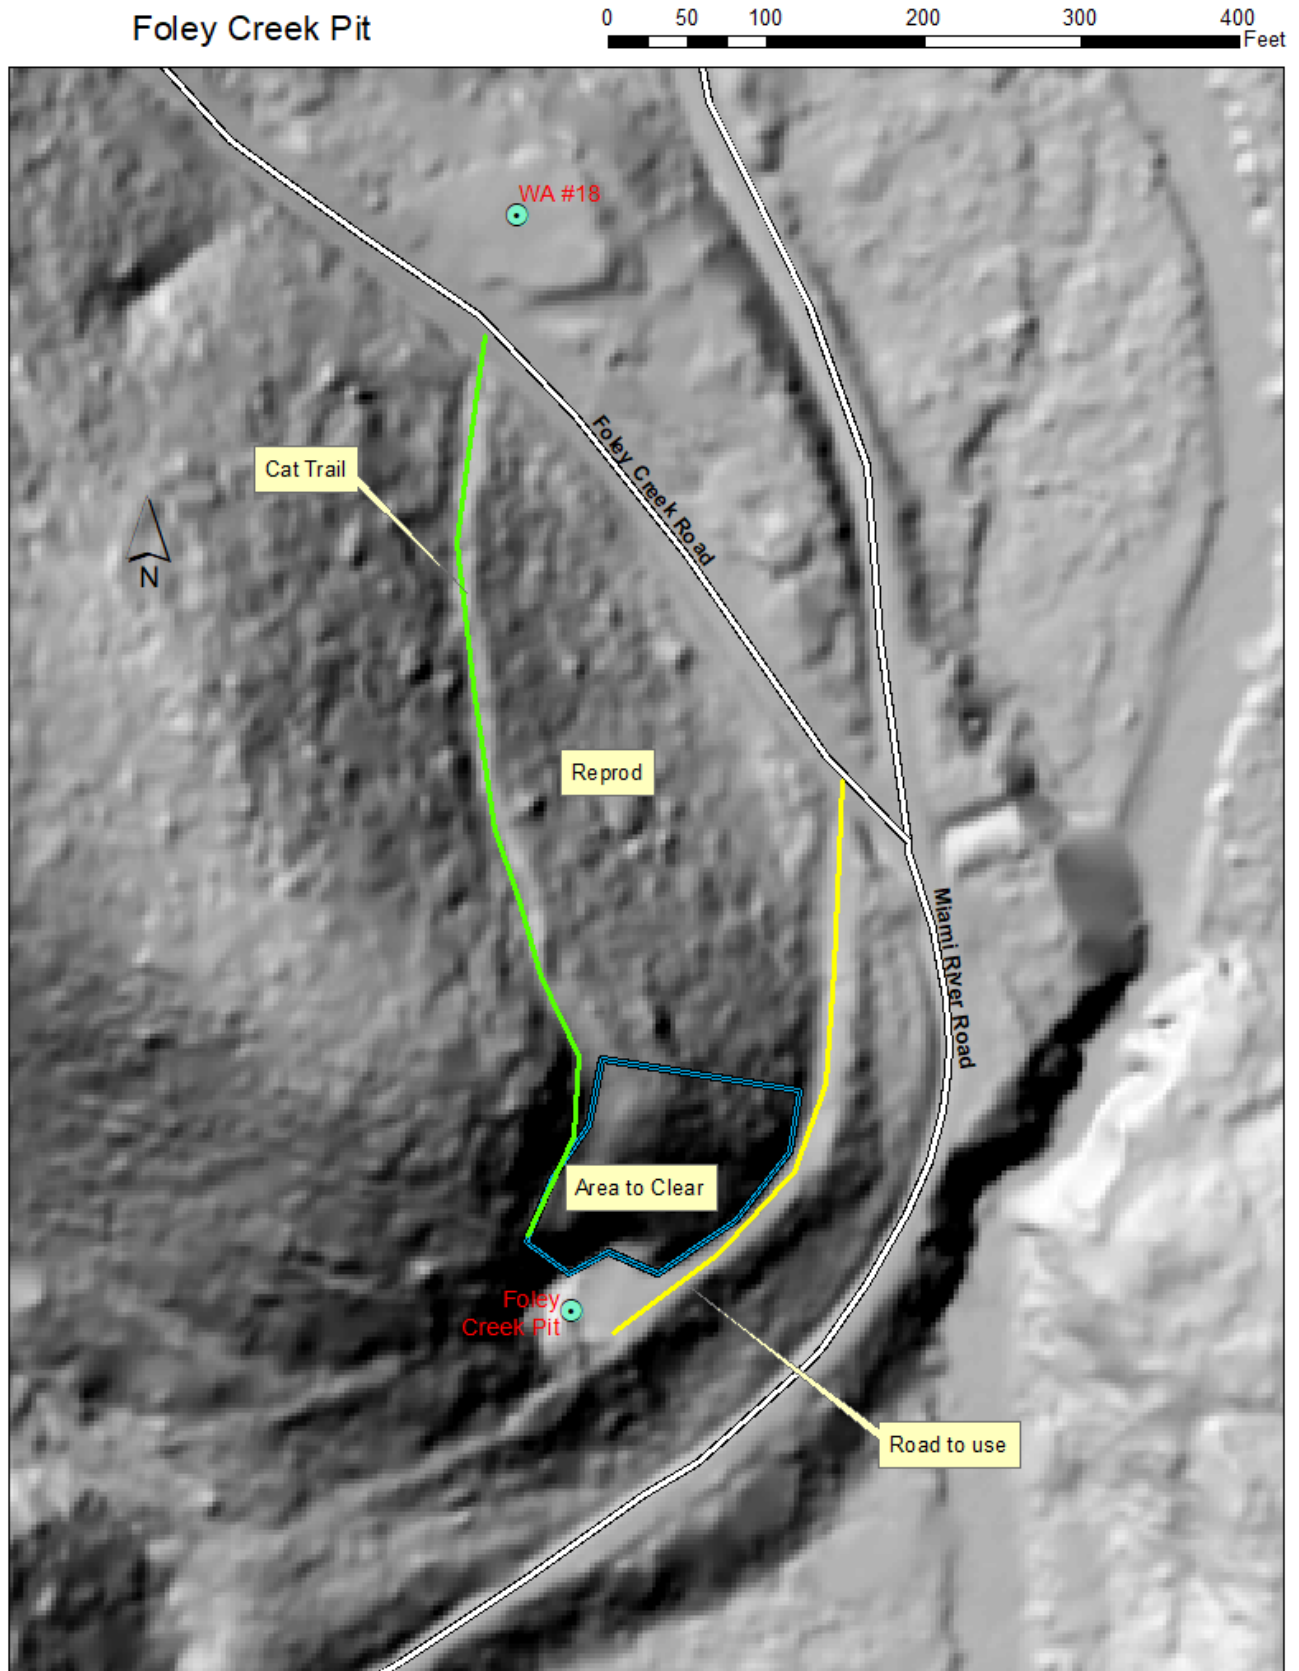


EXHIBIT G  
CULVERT SPECIFICATIONS

All culvert materials shall be furnished and installed by PURCHASER, unless otherwise specified in the Contract. Culverts 30 inches in diameter and smaller shall be constructed of corrugated polyethylene. Polyethylene culverts shall be double-walled and meet the requirements of AASHTO M-294-11, Type S, or ASTM F2648.

Lengths of individual culvert sections shall be not less than 10 feet, unless otherwise provided for in special instructions. The shortest culvert section length shall be placed at the inlet end.

Joining shall be done with bands of like material and corrugations. Manufacturers' instructions shall be followed for prefabricated pipe assembly. Polyethylene joints shall be made with split couplings, corrugated to engage the culvert corrugations, and shall engage a minimum of 4 corrugations, 2 on each side of the culvert joint.

Culverts shall be located according to the alignment and grade as shown on the Plan and Profile, and/or as staked in the field, or as specified in special instructions.

The STATE Representative shall determine final culvert locations and stake the locations in the field prior to installation.

Cross drain culverts on road grades in excess of 3 percent shall be skewed at least 30 degrees from perpendicular to the road centerline, except that cross drain culverts at the low point of dips in roads shall not be skewed.

Culvert grade shall slope away from ditch grade at least 5 percent unless otherwise specified.

The foundation and trench walls for all culverts shall be free from logs, stumps, limbs, stones, and other objects which would dent or damage the culvert. The culvert trench shall be excavated 3 culvert diameters wide to permit compaction and working on each side of the culvert. Tamping shall be done in 6-inch lifts, 1 culvert diameter each side of the culvert to 95 percent density or over. Bedrock shall be excavated as required to provide a uniform foundation for the full length of the culvert. Minimum bedding depth shall be 6 inches.

A bedding of granulated material or crushed rock as specified in Exhibit E shall be placed to provide a wide band of support and to transmit the load from above evenly over the entire length of the culvert.

Backfill shall consist of granulated material, crushed rock as specified in Exhibit E, or job-excavated soil free of stumps, limbs, rocks, or other objects which would damage the culvert.

Transporting of the culvert shall be done carefully. Dragging or allowing free fall from trucks or into trenches shall not be permitted.

Minimum height of cover over top of culvert to subgrade when road is to be rockered shall be 12".

The ends of each culvert shall be free of logs and debris which would restrict the free flow of water. The intake end of relief culverts shall be provided with a sediment catching basin 3 feet in diameter at the bottom. The outlet end of any culvert which would allow water to erode embankment soil shall be provided with an energy dissipator, half round, or other approved slope protection device. Construct lead-off ditches away from culvert outlets where the slope gradients restrict the free flow of water.

Tamping is required on all culverts. Backfills on culverts over 30 inches in diameter shall be compacted with a vibratory hand-operated or Backhoe mounted tamper.

The intake end of culverts shall be marked by installing a 5 foot long, rust-resistant painted steel fence post two feet into the ground, within 6 inches of the inlet on the downgrade side.

All culverts scheduled for replacement shall become property of the PURCHASER and shall be removed from STATE land in the same project period in which replacement occurred.

Damaged culvert inlets and/or outlets shall be repaired by opening them with a hydraulic jack, or cutting off the culvert end to allow for free passage of water at peak flow levels.

A manufacturer's certification that the product was manufactured, tested, and supplied in accordance with this specification shall be furnished to STATE upon request.

EXHIBIT G

CULVERT LIST

CULVERT NO.	DIAMETER (Inches)	LENGTH (Feet)	ROAD SEGMENT Point to Point	STATION
1	18	40	A to B	59+70
2	24	30	A to B	94+20
3	18	30	A to B	94+75
4	18	30	A to B	131+30
5	18	30	A to B	134+25
6	24	40	A to B	276+65
7	18	10	A to B	285+85
8	18	30	A to B	303+80
9	24	30	A to B	314+35
10	18	30	A to B	424+00
11	18	30	A to B	503+25
12	18	40	K to L	19+65
13	18	40	K to L	28+10
14	18	40	K to L	39+80
15	24	30	K to L	74+75
16	30	30	K to L	186+50
17	18	40	K to L	312+55
18	18	30	K to L	324+80
19	18	30	K to L	372+05

\* = Additional 10ft to add to existing culvert and relaid 3ft deeper.

TOTAL LENGTHS BY DIAMETER		
18 INCH	24 INCH	30 INCH
450 Feet	130 Feet	30 Feet

EXHIBIT G

TYPICAL EMBEDDED ENERGY DISSIPATOR



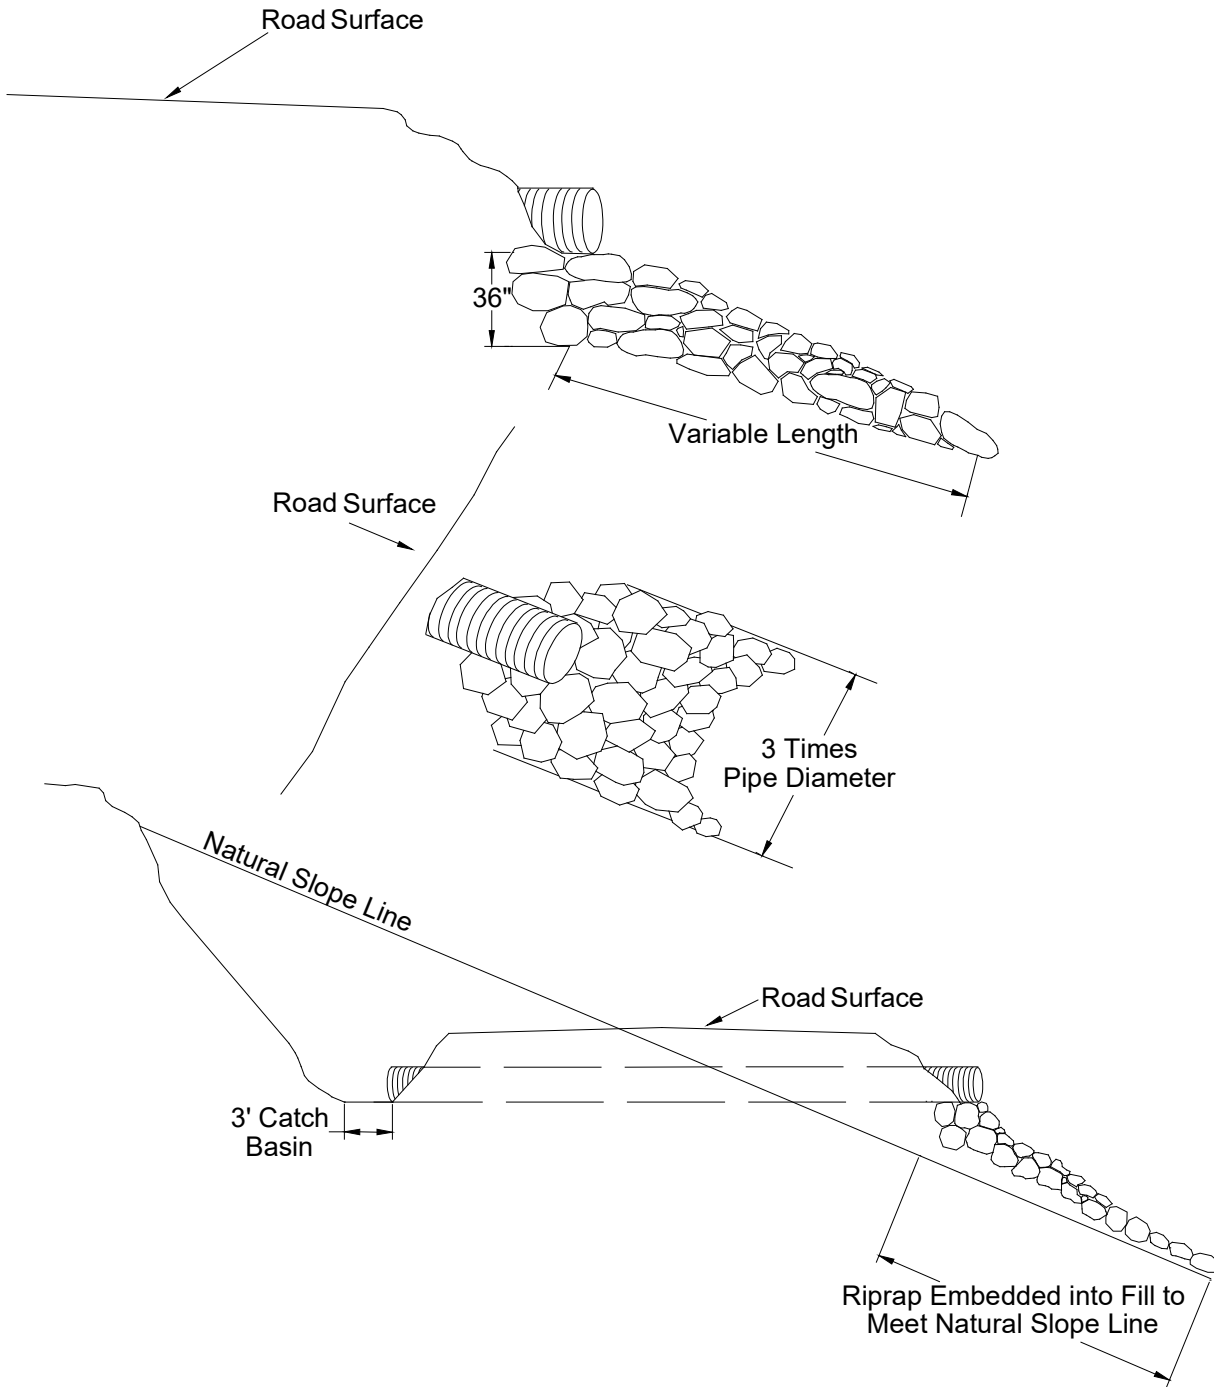


EXHIBIT H

WATERBAR SPECIFICATIONS

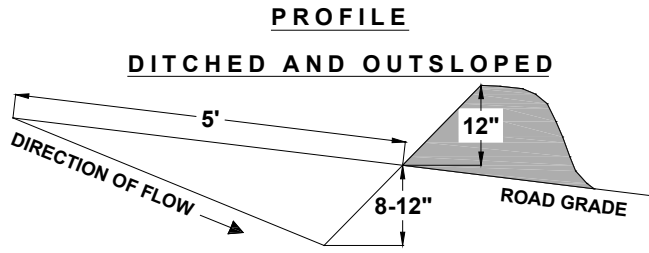

SPACING OF WATERBARS	
ROAD GRADE	DISTANCE
< 6 %	400'
6 - 10 %	200'
11 - 15 %	150'
> 15 %	100'

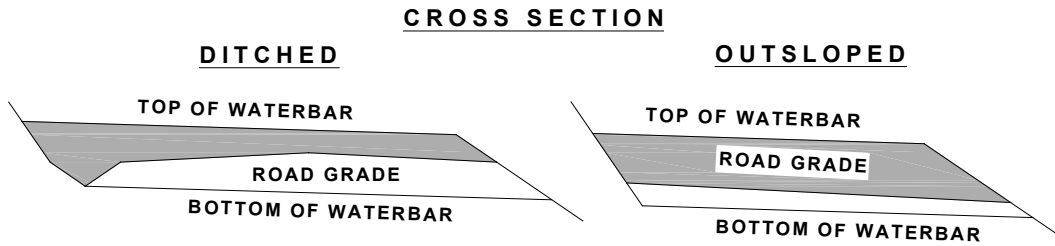

CONSTRUCT DITCHOUT THRU ANY EXISTING BERM.  
CROSS DRAINAGE GRADIENT MINIMUM 3%.



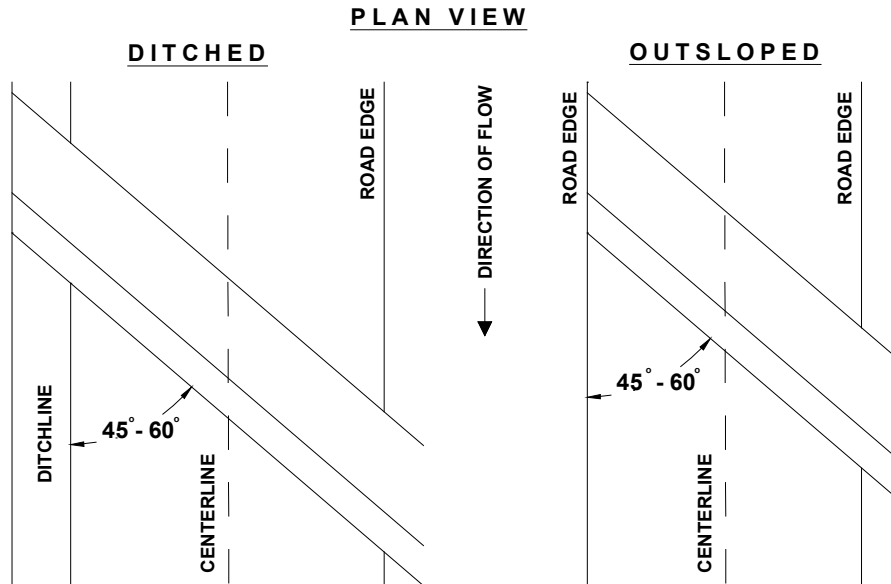


EXHIBIT I  
TANK TRAP SPECIFICATIONS

**PROFILE  
DITCHED AND OUTSLOPED**

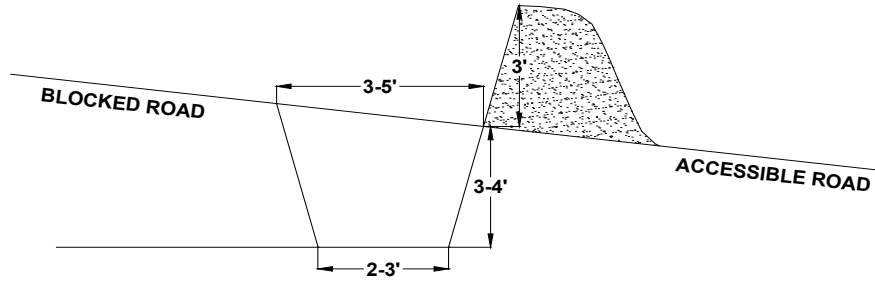


**CROSS SECTION**

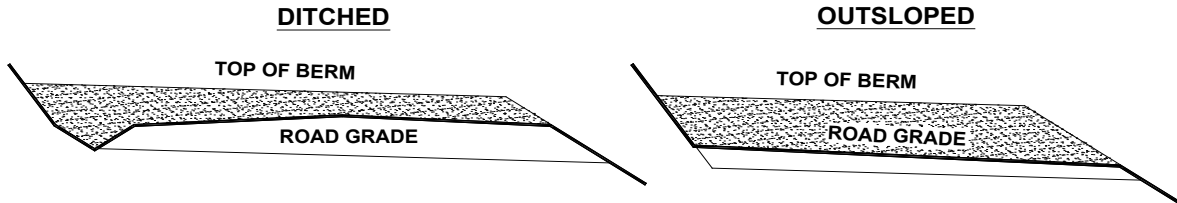

CONSTRUCT DITCHOUT THRU ANY EXISTING BERM.  
CROSS DRAINAGE GRADIENT MINIMUM 3%

**PLAN VIEW**

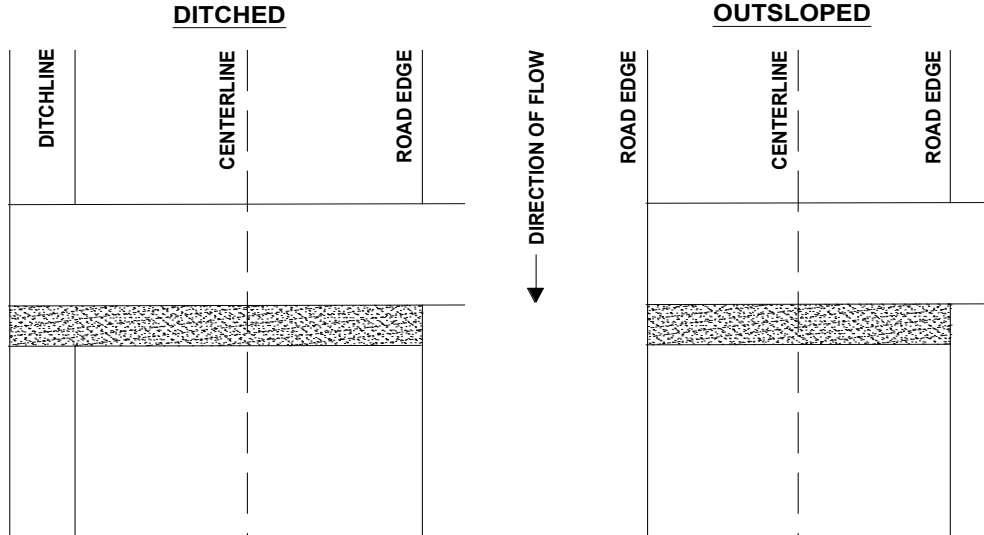

It should be sloped to drain with a relief ditch through the down slope edge of the road. The trench shall be behind the berm for approaching traffic.

EXHIBIT J  
TYPICAL SIDECAST PULLBACK


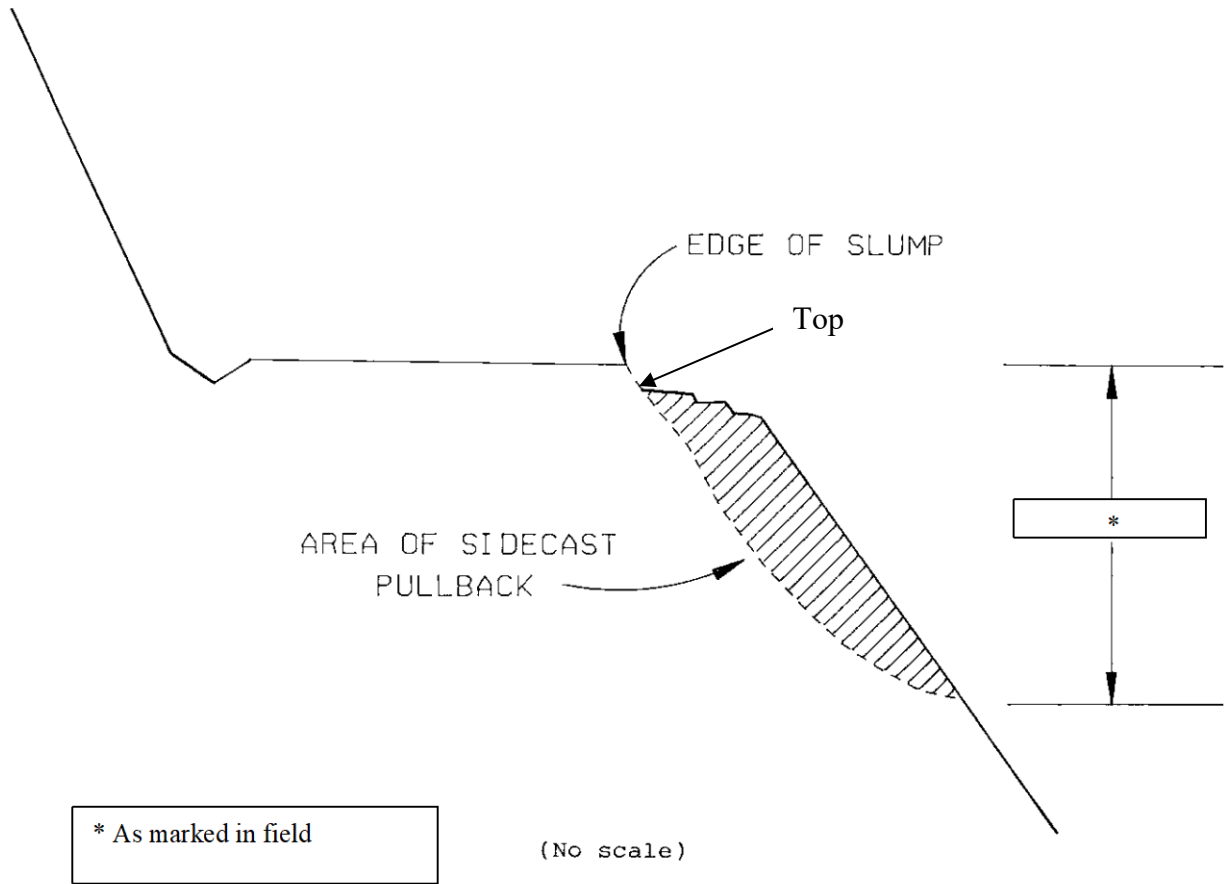


EXHIBIT J

TYPICAL CROSS SECTION VIEW OF SIDECAST PULLBACK AND ROAD REALIGNMENT

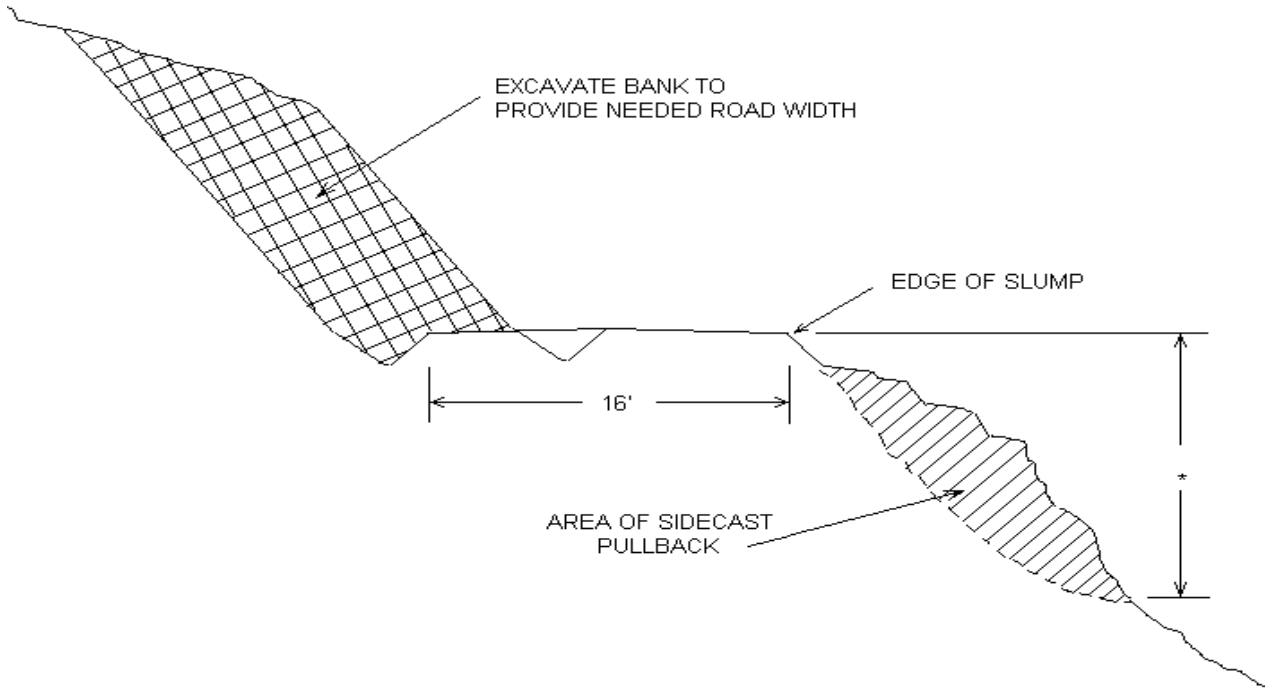

(No Scale)

\* As marked in field

EXHIBIT K  
ROAD CLOSING SPECIFICATIONS

PURCHASER shall close the following road: U to V. Specific objectives for this project include:

GENERAL ROAD CLOSING INSTRUCTIONS

- (1) Remove gate and posts and transport to Oregon Department of Forestry Tillamook Office.
- (2) Block road at station 0+50 with stumps, logs, and slash. Construct tank trap in accordance with Exhibit I.
- (3) Erosion Control. Erosion control shall be completed in a progressive manner. Grass seed shall be applied for every 500 feet of road closed, prior to continuing work. Apply seed to excavated material and bare soils in accordance with the specifications in Exhibit N. Applied mulch shall be a reasonably uniform thickness of 3/4 to 1 1/4 inches and provide a uniform cover.
- (4) Construct Waterbars. Construct waterbars as directed by STATE according and to the specifications in Exhibit H. Install waterbars at 100ft spacing.
- (5) Equipment. A minimum 1 1/2 cubic-yard, track mounted excavator shall be used for all excavation, culvert removal, streambed preparation, road blocking, and waterbarring, unless otherwise approved in writing by STATE.
- (6) Dry Conditions. All work shall be performed during dry conditions acceptable to STATE.
- (7) Support. Support including transport, other equipment, replacements, supplies, maintenance, and repairs, shall be furnished as required to complete the project and shall be furnished without cost to STATE, other than as agreed under the contract terms.

## EXHIBIT L

### SPECIFICATIONS FOR LANDING SLASH PILING

Piling Slash: All piles shall be as compact as possible. Piles shall be built to a height of 3 to 4 feet and then covered to prevent water from reaching the Slash. Each pile shall be covered with polyethylene plastic sheeting. State shall supply the materials used for covering the Slash. Additional woody debris shall be piled on top of the covered piles to complete the piling, as directed by STATE.

Placement of Piles: Piles shall be placed in a location to minimize damage from burning to standing green trees, snags, and culverts. Piles shall be placed as follows:

- (a) No less than 50 feet from any snag, green tree, or culvert, unless otherwise approved by STATE.
- (b) Cull log segments suitable for firewood shall be piled separately from Slash at a distance of no closer than 50 feet from the Slash piles.

## EXHIBIT M

### SPECIFICATIONS FOR SKID ROAD CLOSURE

All skid/forwarder roads shall be closed by PURCHASER prior to the timber sale completion.

Skid roads shall be closed by constructing a barrier which makes the road impassable to vehicular traffic. Where skid roads meet permanent forest roads, PURCHASER shall block access to vehicular traffic by placing several root wads across the road.

All berms or holes caused by logging Operations shall be flattened out to as close to the natural slope as possible.

Scatter locally available woody material (logs, stumps, brush, Slash, etc.) on the closed running surface.

Waterbar the subgrade and running surface at a spacing of no more than 100 feet and as specified in Exhibit H, "Waterbar Specifications."

Apply seed to the roadbed as specified in Exhibit N, "Seeding and Mulching."

EXHIBIT N  
SEEDING AND MULCHING

SEEDING

This work shall consist of preparing seedbeds and furnishing and placing required seed.

Seeding Seasons. Seeding shall be performed only from March 1 through June 15 and August 15 through October 15. Seeding materials shall not be applied during windy weather or when the ground is excessively wet or frozen. Areas of disturbed soil shall be seeded by the end of the project period in which work was started.

Soil Preparation. Areas to be seeded that have been damaged by erosion or other causes shall be restored prior to seeding. All areas to be seeded shall be finished and then cultivated to provide a reasonably firm, but friable seedbed. A minimum of 1/2 inch of surface soil shall be in a loose condition.

Application Methods for Seed

Dry Method. Mechanical seeders, seed drills, landscape seeders, cultipacker seeders, or other approved mechanical seeding equipment shall be used to apply the seed in the amounts and mixtures specified. Hand-operated seeding devices may be used when seed is applied in dry form.

Application Rates for Seed

Seed listed below shall be applied at the following rates per acre:

SPECIES	Lb./Acre	MIXTURE	PURE LIVE SEED	Repellent
Fine Fescue	24	40%	98%	0
Annual Ryegrass	12	20%	98%	0
Perennial Ryegrass	18	30%	98%	0
White Dutch Clover	6	10%	98%	0

Seeding will be considered acceptable when all other specified requirements in Exhibit N have been completed and a healthy, uniform, close stand of grass has been established, unless otherwise approved in writing by STATE.

MULCHING

This work shall consist of furnishing and placing required mulch. Mulch shall consist of straw that is free of noxious weeds.


Mulching Period. Straw mulch shall be applied within 24 hours of spreading grass seed.

Application Rates for Mulch

Place straw mulch to a reasonably uniform thickness of 3/4 to 1 1/4 inches. This rate requires between 1 and 1 1/2 tons of dry mulch per acre.

EXHIBIT O  
FILL REINFORCEMENT

Excavate material for the height and width indicated in Exhibit D. Endhaul all material and construct rip rap wall to reinforce outside edge of fill.

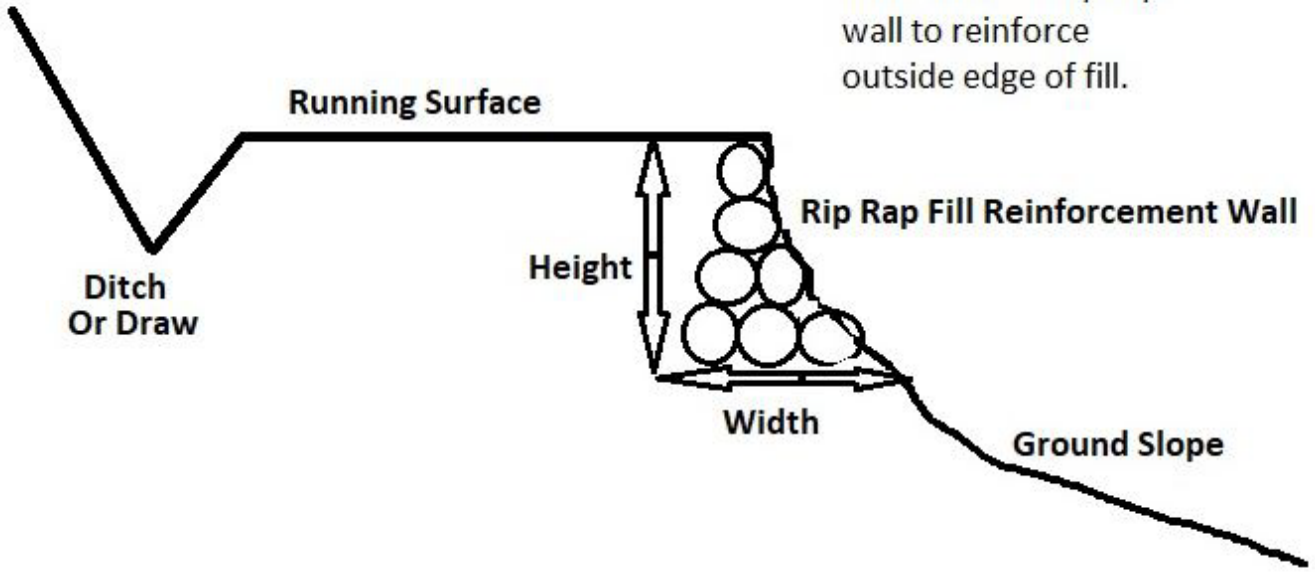

## WRITTEN PLAN

PROTECTED WATERS: Miami River, a large fish bearing stream.  
East Foley Creek, a large fish bearing stream

LOCATIONS: Section 29, T2N, R9W, W.M. Tillamook County, Oregon.  
Section 21, T2N, R9W, W.M. Tillamook County, Oregon.  
Section 20, T2N, R9W, W.M. Tillamook County, Oregon.  
Section 6, T2N, R9W, W.M. Tillamook County, Oregon.

ACTIVITIES: Culvert replacement in stream within 100ft of fish stream.  
Hazard tree removal within 100ft of fish stream.  
Road repair and rebuild adjacent to fish stream.  
Culvert repair within 100ft of fish stream.  
Sidecast pullback adjacent to fish stream.

### PROTECTION MEASURES:

- All necessary measures will be taken to prevent sediment from entering "live" streams, including but not limited to:
  - Fill material will be placed and compacted in 8 inch lifts. Fill slopes will be constructed at a 1 ½:1 fill width to height ratio.
  - Waste material will be end-hauled to stable locations.
  - Riprap placement will be accomplished by placing rock by machine rather than end dumping.
  - All disturbed soil will be grass seeded and mulched.
  - Water will be diverted around work site.
  - Work will only be done between July 1<sup>st</sup> and September 15<sup>th</sup>.
  - Spill kits will be available onsite while the machine work is conducted.
  - Culvert has been sized for 100 year flood event.

PREPARED BY: Matthew Wolford, Road Specialist  
August 23, 2023