


Oregon Department of Forestry

2600 State St Salem OR 97310

PART III: EXHIBITS
EXHIBIT B
TIMBER SALE OPERATIONS PLAN

(See page 2 for instructions)

Date Received by State: _____

(5) State Brand Information (Complete)

(1) Contract Number: WO-341-2025-W01092-01

(2) Sale Name: Thin Bear

(3) Contract Expiration Date: 10/31/2026

(4) Purchaser Name: _____

(6) State Representatives:

<u>Name</u>	<u>Circle One</u>	<u>Phone No.</u>	<u>Cell No.</u>	<u>Alt Phone</u>
	Logging Projects All			
	Logging Projects All			
	Logging Projects All			
	Logging Projects All			

(7) Purchaser Representatives:

<u>Name</u>	<u>Circle One</u>	<u>Phone No.</u>	<u>Cell No.</u>	<u>Alt Phone</u>
	Logging Projects All			
	Logging Projects All			
	Logging Projects All			
	Logging Projects All			
	Logging Projects All			
	Logging Projects All			
	Logging Projects All			

(8) Name of Subcontractors and Start Dates:

<u>Project No.</u>	<u>Subcontractor Name.</u>	<u>Start Date</u>	<u>Completion Date</u>	<u>Cell No.</u>	<u>Alt Phone</u>

	<u>Subcontractor Name.</u>	<u>Start Date</u>	<u>Cell No.</u>	<u>Alt Phone</u>
FELLING				
YARDING				

(9) Comments:

(10) Operations Map: Attach a copy of timber sale Exhibit A or other suitable map which plainly shows the items listed on the instruction sheet.



Oregon Department of Forestry

2600 State St Salem OR 97310

PART III: EXHIBITS

EXHIBIT B


INSTRUCTION SHEET FOR OPERATIONS PLAN

SUBMIT ONE COPY OF PLAN STATE

Operations shall be limited to the work shown in the plan until a revised plan or supplemental plan is submitted covering additional work. Compliance with this plan is not in lieu of compliance with any federal requirements related to the federal Endangered Species Act including without limitation PURCHASER'S independent obligation to avoid take of a T&E species and PURCHASER'S obligation to comply with terms and conditions of any incidental take Permit(s) that include required minimization and mitigation measures in any applicable Habitat Conservation Plan. If STATE has prepared a required Forest Practices Act (FPA) "Written Plan" for operations, PURCHASER shall comply with all provisions of the Written Plan.

Explanation of Item No.(from Page 1)

- (5) All sales require you to use a brand furnished by STATE. If the State brand has not been assigned when the plan is submitted, it will be furnished and assigned later. Complete drawing. If more than one brand is assigned to the sale, complete both drawings.
- (6) The contract requires you to have a designated representative available on the sale area or work location who is authorized to receive in your behalf any notice or instruction given by STATE and to take action in regard to performance under the contract. If logging and project work is widely separated, a representative is required for each.
- (7) The STATE representative will be designated when your plan is approved and is the person who will inspect and issue instructions regarding performance.
- (8) Show names of subcontractors to be used for any or all phases of the operations. If subcontractors are not Known, or are changed later, give notification to the STATE representative prior to commencement of work by subcontractor.
- (9) Show projected dates for commencement of both projects and logging. If projected dates need to be changed at a later date, notification must be given to the STATE representative by supplemental plan or otherwise, prior to commencement of such operations.
- (10) The STATE representative will furnish extra copies of Exhibit A of the contract for your use in preparing the operations map. The map shall use the following legend and show:
 1. Landing locations, approximate setting boundaries, and probable sequence of logging the settings. Number the settings in sequence.
 2. Locations of spur roads planned for construction, other than required by the timber sale contract. Provide spur road specifications
 3. Locations of proposed tractor yarding roads. Show if and how marked on the ground.
 4. Locations of temporary stream crossings.
 5. List the sequence of performing project work.
 6. Location of rock sources - attach pit development plans.

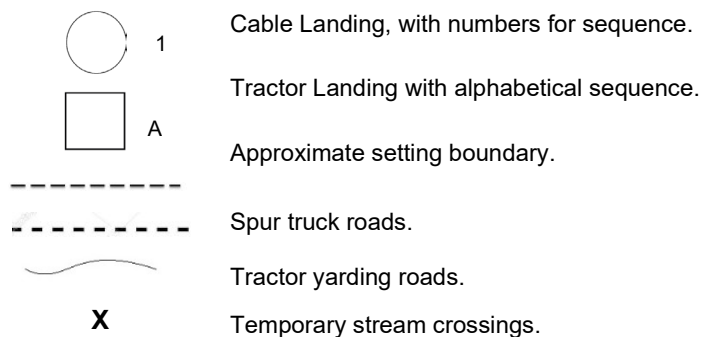



Oregon Department of Forestry
 2600 State St Salem OR 97310
 PART III: EXHIBITS
EXHIBIT B
OPERATIONS PLAN

Completion Timeline

Indicate on the appropriate timeline below, the dates by which you plan to complete the work as required under this contract. The purpose of this section is to develop a plan that will ensure you complete the work as required, and meet the interim completion date(s) and contract expiration date. This plan is incorporated and made a part of the contract. When, in the opinion of STATE, operations are not commencing in a manner that meets the intent of this plan, you may be placed in violation of contract and your operations suspended until an amended plan is submitted and approved by STATE.

Projects

Month/Year Date ____/____/____	Month/Year Date ____/____/____	Month/Year Date ____/____/____	Month/Year Date ____/____/____	Month/Year Date ____/____/____

Work Commences	25%	50%	75%	Projects Complete

Harvest & Other Requirements

Month/Year Date ____/____/____	Month/Year Date ____/____/____	Month/Year Date ____/____/____	Month/Year Date ____/____/____	Month/Year Date ____/____/____

Work Commences	25%	50%	75%	Sale Complete

The Federal Endangered Species Act (ESA) prohibits a person from taking any federally listed threatened or endangered species. Taking under the federal ESA may include alteration of habitat. STATE's approval of this plan does not certify that PURCHASER's operation under the plan is lawful under the federal ESA or that the plan is consistent with the terms and conditions of any applicable incidental take Permit(s) including any required minimization and mitigation measures proposed in the applicable Habitat Conservation Plan. As provided in the timber sale contract, PURCHASER's must comply with all applicable state, federal, and local laws, including without limitation any Permit(s) issued thereunder.

PURCHASER's compliance with this plan is not in lieu of compliance with any federal requirements related to the federal Endangered Species Act.

APPROVED; Date: _____

SUBMITTED BY:
PURCHASER

STATE OF OREGON - DEPARTMENT OF
FORESTRY

Title _____

Title _____



Oregon Department of Forestry
EXHIBIT C - SAWMILL GRADE (WESTSIDE SCALE)
SCALING INSTRUCTIONS - LOCATION APPROVAL - BRAND INFORMATION
West Oregon - NWOA

(1) ORIGINAL REGISTRATION ☐ Date _____
REVISION NUMBER 000 ☐ Date _____
CANCELLATION ☐ Date _____

(2) TO: _____
(Third Party Scaling Organization)

(3) FROM: West Oregon Phone (541) 929-3266
(State Forestry District)
Address: 24533 ALSEA HWY
PHILOMATH, OR 97370

(4) PURCHASER: _____
Mailing Address: _____
Phone Number: _____

(5) MINIMUM SCALING SPECIFICATIONS	
SPECIES	MINIMUM NET VOLUME
Conifers	10
Hardwoods	10

*Apply minimum volume test to whole logs over 40' Westside

(6) WESTSIDE SCALE: _____
Use Region 6 actual taper rule. Logs over 40'.

(8) APPROVED SCALING LOCATIONS (as shown on the ODF Approved Locations web-site)	YES NO		Species	Yard	Truck	Weight
	<input type="checkbox"/>	<input checked="" type="checkbox"/>				

(9) SALE NAME: Thin Bear
COUNTY: Lincoln

(10) STATE CONTRACT NUMBER:
WO-341-2025-W01092-01

(11) STATE BRAND REGISTRATION NUMBER:

(12) STATE BRAND INFORMATION:



(13) PAINT REQUIRED: YES ☒
COLOR: Orange

(14) SPECIAL REQUESTS (Check applicable)	
PEELABLE CULL (all species).....	<input checked="" type="checkbox"/>
NO DEDUCTIONS ALLOWED FOR MECHANICAL DAMAGE	<input checked="" type="checkbox"/>
ADD-BACK VOLUME - Deductions due to delay...	<input checked="" type="checkbox"/>
OTHER :	

(15) REMARKS:
"Mule Trains"
1. Loads are required to have load tickets for each set of bunks.
2. If truck and pup are to be weighed, weigh and process separately for gross and tare weights.

Operator's Name (Optional inclusion by District): _____

(16) SIGNATURES:

Purchaser or Authorized Representative Date

State Forester Representative Date

State Forester Representative PRINT NAME

Notify the District within one hour when branding or painting is inadequate for quick identification, the receipts are missing, not correctly or completely filled out, and/or when logs presented for scaling are impossible to scale accurately.
General Distribution: TPSO, Approved Scaling Locations and Purchaser.



Oregon Department of Forestry
EXHIBIT C - SAWMILL GRADE
INSTRUCTIONS FOR EXHIBIT C
West Oregon - NWOA

- (1) Check appropriate box. REVISION NUMBER requires comments. CANCELLATION requires logging and hauling to be complete, recall branding hammers.

- (2) Designate Third Party Scaling Organization (TPSO).

Columbia River Log Scaling & Grading Bureau
P.O.Box 7002, Eugene, OR 97401
Phone: (541) 342-6007 Fax: (541) 342-2631
Email: services@crls.com

Mountain Western Log Scaling & Grading Bureau
2560 NW Medical Park Drive, OR 97471
Phone: (541) 673-5571 Fax: (541) 672-6381
Email: info@mwlsqb.com

Northwest Log Scalpers Inc.
6137 NE 63rd St, Vancouver, WA, 98661
Phone: (360) 553-7212 ext. 4 Fax: (360) 553-7213
Email: info@nwlogscalpers.com

Pacific Rim Log Scaling Bureau, Inc.
8288 28th Court North East, Lacey, WA 98516
Phone: (360) 528-8710 Fax: (360) 528-8718
Email: office@prlsb.com

Yamhill Log Scaling & Grading Bureau
P.O.Box 709, Forest Grove, OR 97116
Phone: (503) 359-4474 Fax: (503) 359-4476
Email: yamhilllog@frontier.com

- (3) State District office, address and phone.

- (4) Enter Purchaser's business name, address, and phone number as it appears on the Contract.

- (5) Minimum Scaling Specifications.

- (6) Westside - Region 6 actual taper segment scale. Check Yes or No. Special Service Rules on file with TPSO. See: Segment Scaling and Grading of Long Logs - All Species - State Forestry Department Scaling Practices (Westside).

- (7) Weight Scale Sample - Check box if sale is to be a Weight Scale Sample. All specifics for handling, scaling and processing will be attached or explained in the Remarks section item (15).

- (8) Show scaling locations only applicable to TPSO. Location name should appear as it does on the ODF Approved Scaling Location web site: https://apps.odf.oregon.gov/Divisions/management/asset_management/scalinglocation.asp Locations with scaling and processing directions specific to their location should be on a separate form. Species should be identified if not capable of receiving "all" species. Check appropriate box for either: yard, truck scale, or weight. Refer to the web site listed above for the locations approval status.

- (9) Enter sale name and county.

- (10) Enter sale Contract number.

- (11) Enter Oregon's State Brand Registry Number (**REQUIRED**).

- (12) Show brand assigned to timber sale. One brand only. If more than one brand is assigned to the sale: (1) make a separate form for each brand and (2) on each form, explain and show other brand(s) in the Remarks section item (15).

- (13) Check yes for Paint Required and designate "Orange" for color. Non required removal volumes may sometimes require blue paint.

- (14) Special Requests. These are requests that will be applied to ODF timber sales. All boxes applicable to the timber sales designated in the Exhibit C form must be "marked". If "Other" is indicated, it must contain a description and any necessary comments.

- (15) Use this space to designate any weight scale sample instructions or any other explanations to clarify scaling, processing and/or mailing requirements. If additional scaling locations are approved, revise original or current form showing all (old and new) locations. Check REVISION box at top of form and explain under remarks. Route as indicated.

- (16) Require purchaser to sign and date completed form in addition to State Forester Representative, sign and print name on the form. Signatures not required on revisions.



**Oregon Department of Forestry
EXHIBIT C - PULP SORT
PROCESSING INSTRUCTIONS - LOCATION APPROVAL
BRAND INFORMATION**

West Oregon, NWOA

(1) ORIGINAL REGISTRATION ☐ Date _____
REVISION NUMBER 000 ☐ Date _____
CANCELLATION ☐ Date _____

(9) **SALE NAME:** Thin Bear

COUNTY: Lincoln

(2) TO: _____
(Approved Pulp Processing Facility)


(10) **STATE CONTRACT NUMBER:**

WO-341-2025-W01092-01

(3) FROM: West Oregon Phone (541) 929-3266
(State Forestry District)
Address: 24533 ALSEA HWY
PHILOMATH, OR 97370

(11) STATE BRAND REGISTRATION NUMBER: _____

(12) STATE BRAND INFORMATION:



(4) PURCHASER: _____

(5) Scaling Bureau (TPSO) Processing Weight receipts:

Mailing Address: _____

Phone Number: _____

(13) **REMARKS:**

"Mule Trains"

1. Loads are required to have load tickets for each set of bunks.
2. Truck and pup are to be weighed and processed separately for gross and tare weights.

(6) **STATE Definition of Approved Pulp Sort:**

- Top portion of the tree (tops).
- All logs with a diameter (Big End) greater than 8 inches marked with blue paint.

Operator's Name (Optional inclusion by District): _____

(7) PULP FACILITY PROCESSING INSTRUCTIONS:

- Pulp loads shall be weighed in lieu of scaling.
- One Ton = 2000 lbs (Short Ton).
- Pulp loads shall have a yellow Log Load Receipt attached.
- Gross weight and truck tare weight for each load shall be machine printed on the weight receipt.
- Weigher shall sign the weight receipt.
- Weigher shall record the Log Load Receipt number on the weight receipt.
- Weigher shall attach the Weight receipt to the Log Load Receipt and mail them weekly to the TPSO processing the Weight receipt.

(14) **SIGNATURES:**

Purchaser or Authorized Representative _____ Date _____

State Forester Representative _____ Date _____

State Forester Representative PRINT NAME _____

(8) TPSO PROCESSING INSTRUCTIONS

- Submit data files daily (or each day of activity).
- Mail or deliver scale tickets weekly to ODF Headquarters in Salem.

Notify the District within one hour when branding is inadequate for quick identification, the logs are marked with orange paint, the receipts are missing, not correctly or completely filled out, and/or logs do not meet the specifications of the STATE definition of Approved Pulp Sort.

General Distribution: TPSO, Approved Scaling Locations and Purchaser.



**Oregon Department of Forestry
EXHIBIT C - PULP SORT
INSTRUCTIONS FOR EXHIBIT C**

West Oregon, NWOA

- (1) Check appropriate box. REVISION NUMBER requires comments. CANCELLATION requires logging and hauling to be complete, recall branding hammers.
- (2) Approved Pulp Processing Facility. Write in as written in the Approved Log Delivery Location
https://apps.odf.oregon.gov/Divisions/management/asset_management/scalinglocation.asp
- (3) State District office, address and phone.
- (4) Enter Purchaser's business name, address, and phone number as it appears on the Contract.
- (5) Third Party Scaling Organization that will be processing the weight tickets, mailing address, and phone number.

Columbia River Log Scaling & Grading Bureau
P.O.Box 7002, Eugene, OR 97401
Phone: (541) 342-6007 Fax: (541) 342-2631
Email: services@crls.com

Pacific Rim Log Scaling Bureau, Inc.
8288 28th Court North East, Lacey, WA 98516
Phone: (360) 528-8710 Fax: (360) 528-8718
Email: office@prlsb.com

Mountain Western Log Scaling & Grading Bureau
2560 NW Medical Park Drive, Roseburg, OR 97471
Phone: (541) 673-5571 Fax: (541) 672-6381
Email: info@mwlsqb.com

Yamhill Log Scaling & Grading Bureau
P.O.Box 709, Forest Grove, OR 97116
Phone: (503) 359-4474 Fax: (503) 359-4476
Email: yamhilllog@frontier.com

Northwest Log Scalers Inc.
6137 NE 63rd St, Vancouver, WA, 98661
Phone: (360) 553-7212 ext. 4 Fax: (360) 553-7213
Email: info@nwlogscalers.com

- (6) Big end of log is not to exceed 2 inches greater than the minimum removal specifications in the contract. Example: Minimum removal specifications 6 inches and 20 board feet, then the Big end of log not to exceed 8 inches. When conifer and hardwood removal specifications are different, use the smaller removal diameter to determine this specification.
- (9) Enter sale name and county.
- (10) Enter sale Contract number.
- (11) Enter Oregon's State Brand Registry Number **(REQUIRED)**.
- (12) Show brand assigned to timber sale. One brand only, if more than one brand is assigned to the sale: (1) make a separate form for each brand and (2) on each form, explain and show other brand(s) in the Remarks section Item (13).
- (13) Use this section to list any special instructions or the reason for any revisions in section item (1).
- (14) Require purchaser to sign and date completed form in addition to State Forester Representative, sign and print name on the form. Signatures not required on revisions.

EXHIBIT D
FOREST ROAD SPECIFICATIONS

SUBGRADE WIDTH	SURFACED WIDTH	POINT TO POINT	STATION TO STATION	DRAINAGE
14 feet	n/a	A to B	0+00 to 5+20	Outsloped
14 feet	n/a	C to D	0+00 to 1+60	Outsloped
16 feet	14 feet	1 to 2	0+00 to 243+30	Crowned/Outsloped
14 feet	12 feet	3 to 4	0+00 to 3+50	Outsloped
14 feet	n/a	5 to 6	0+00 to 2+40	Outsloped
14 feet	n/a	7 to 8	0+00 to 9+20	Outsloped
14 feet	12 feet	9 to 10	0+00 to 5+30	Outsloped
14 feet	12 feet	11 to 12	0+00 to 1+80	Outsloped
14 feet	12 feet, n/a	13 to 14	0+00 41+40	Crowned/Outsloped

CLEARING. This work shall consist of clearing, removing, and disposing of all trees, Snags, Down Timber, brush, surface objects, and protruding obstructions within the clearing limits.

All danger trees, leaners, and Snags outside the clearing limits which could fall and hit the road shall be felled.

CLEARING CLASSIFICATION.

New Construction - Where clearing limits have not been marked, the clearing limits shall extend 5 feet back of the top of the cutslope and 5 feet out from the toe of the fill slope, or as directed by STATE.

Improvement - The "Road Brushing Specifications" in Exhibit E shall apply. Where clearing limits have not been marked, the clearing limits shall extend 5 feet back of the top of the cutslope and 5 feet out from the toe of the fill slope, or as directed by STATE.

GRUBBING. This work shall consist of the removal or digging out of stumps and protruding objects.

All stumps shall be completely removed within the limits of required grubbing. Stumps overhanging cut slopes shall be removed. Grubbing debris shall not be placed or permitted to remain in or under any road embankment sections.

GRUBBING CLASSIFICATION.

New construction - from the top of the cut slope to the toe of the fill.

Improvements and reconstructions - 4 feet back from the shoulder of the subgrade or ditch, whichever is widest, or as marked in the field.

EXHIBIT D

FOREST ROAD SPECIFICATIONS

CLEARING AND GRUBBING DISPOSAL. Clearing and grubbing debris shall not be placed or permitted to remain in or under any road embankment sections. Clearing and grubbing debris shall be left in a stable location, and not left lodged against standing trees. Clearing and grubbing debris may be scattered through openings in the timber outside of the cleared right-of-way, except for the following areas where debris shall be fully contained and hauled to a designated waste area:

- Where end-haul is required
- On unstable areas
- In any stream channel (Type F, N or D) or where material may enter the stream channel.

Clearing, grubbing, and associated disposal shall be completed prior to subgrade approval.

EXCAVATION. Excavation and grading shall not be done when weather and/or ground conditions are such that damage will result to existing subgrade or cause excessive erosion.

Excavation shall conform to STATE-specified lines, grades, dimensions, and plans when provided.

Unless road plans show otherwise, all roads shall be on a balanced cross section, except when the slope is over 50 percent, the road shall be on full bench for the width specified.

Suitable excavated material shall be used for the formation of fills, shoulders, and drainage structure backfills. Embankment materials shall be free of woody debris, brush, muck, sod, frozen material, and other deleterious materials.

Sidecast includes any road generated excess excavation material which is not essential as part of the road prism, is not compacted, and is below the roadway. Sidecast shall not be placed where it will enter a stream course. Leaving sidecast below the road is only permissible if specifically allowed in "Full Bench and End Haul Requirements" in this Exhibit.

All fills shall be machine compacted according to the "Compaction and Processing Requirements" in this Exhibit.

ROAD WIDTH LIMITATIONS. PURCHASER shall obtain advance written approval from STATE to construct the road to a greater width than specified. Extra subgrade width shall be required for:

Fill Widening. Add to each fill shoulder 1 foot for fills 3 feet to 6 feet high; 2 feet for fills over 6 feet high.

Curve Widening. Widen the inside shoulder of all curves as specified in the plans or as follows: 400 divided by the radius of the curve equals the amount of extra width.

DRAINAGE

Subgrade. Subgrade shall be crowned 4 to 6 percent or outsloped at 3 to 4 percent as shown on the "Forest Road Specifications" table in this Exhibit.

Ditch. Construct V shaped ditch 3 feet wide and to a depth of 1 foot below subgrade.

Ditchouts. Construct ditchouts to drain away from subgrade at locations marked in the field or as directed by STATE.

TURNOUTS. Increase roadbed width an additional 8 feet for both subgrade and surfacing. Length shall be at least 50 feet, or as staked on the ground, plus 25-foot approaches at each end.

Location: Intervisible but not greater than 750 feet apart and as marked in the field.

SLOPES

Solid Rock

Fractured Rock

Soil - side slopes 50% and over

Soil - side slopes less than 50%

Cut Slopes

Vertical to $\frac{1}{4}$:1

$\frac{1}{2}$:1

$\frac{3}{4}$:1

1 :1

Fill Slopes

1½:1

1½:1

Top of cut slope shall be rounded.

EXHIBIT D

FOREST ROAD SPECIFICATIONS

LANDINGS. Landings shall be constructed as posted in the field, no less than 50 feet wide and no more than 70 feet wide unless otherwise approved by STATE. Surface is to be crowned for drainage with general grade no more than 3 percent. Surface as shown in the "Road Surfacing" table in this Exhibit.

TURNAROUNDS. Increase subgrade width an additional 20 feet for a length of 20 feet at locations marked in the field.

SEASONAL WINTERIZATION. All unsurfaced roads or unfinished subgrades shall be waterbarred in accordance with the specifications in this Exhibit, and blocked from vehicular traffic prior to October 1, annually and as directed by STATE.

GENERAL ROAD CONSTRUCTION INSTRUCTIONS:

- (1) Timber Removal. Remove all trees within posted Right-of-Way Boundary or individually marked with an orange "C", as specified in Section 2210, Designated Timber.
- (2) Excavated Materials. Excavated materials shall be utilized for road construction and hauled in where necessary. Surplus excavation materials shall be hauled to the waste areas as marked in the field and/or designated on Exhibit A. Surplus excavated materials and waste materials shall be sloped and compacted for drainage. Fills shall be thoroughly compacted in accordance with this Exhibit.
- (3) Culvert Installation. Culverts in live streams shall be installed with the inlet and outlet on grade with the stream bottom, unless otherwise specified in writing. Fill construction backfill shall consist of select materials and may be obtained from borrow pits, as directed by STATE. Backfill materials shall be hauled in where necessary and thoroughly compacted in accordance with this Exhibit. STATE may require the use of crushed rock for culvert bedding.
- (4) Equipment. All excavation and riprap placement shall be performed using a minimum 1½ cubic-yard, track-mounted excavator.
- (5) Subgrade Preparation and Application of Surfacing Rock.
 - (a) Complete culvert installations, drainage ditches, ditchouts, fill construction, and other specified work prior to the application of surfacing rock.
 - (b) Subgrade shall be crowned at 4 to 6 percent or outsloped at 3 to 4 percent.
 - (c) Upon completion of above required work, apply, process, and compact surfacing rock in accordance with specifications in the "Compaction and Processing Requirements" in this Exhibit. Final road surface shall be crowned at 4 to 6 percent or outsloped at 3 to 4 percent.

EXHIBIT D

FOREST ROAD SPECIFICATIONS

SPECIFIC ROAD CONSTRUCTION INSTRUCTIONS (Project No. 1)

<u>Segment</u>	<u>Station</u>	<u>Work Description</u>
A to B	0+00 to 5+20	Construct outsloped, unsurfaced road with dozer and excavator. Shape and compact subgrade with grader and vibratory roller.
	0+00	Install 18"x40' CPP in existing ditch crossing with excavator. Utilize 10 CY of 1½"-0" rock as culvert bedding material. Compact bedding material with a hand-tamping device. Construct fill depth to a minimum depth of 18 inches. Compact fill in 8-inch lifts.
	0+00 to 0+50	Apply 10 CY of jaw-run rock as transition rock. Process and compact rock with dozer and vibratory roller.
	5+20 (Pt. B)	Construct a 40'x40' crowned, unsurfaced landing with dozer and excavator. Shape surface with grader and compact with vibratory roller.
C to D	0+00 to 1+60	Construct outsloped, unsurfaced road with dozer and excavator. Shape and compact subgrade with grader and vibratory roller.
	1+60 (Pt. D)	Construct a 40'x40' crowned, unsurfaced landing with dozer and excavator. Shape surface with grader and compact with vibratory roller.

EXHIBIT D

FOREST ROAD SPECIFICATIONS

GENERAL ROAD IMPROVEMENT, SURFACE ROCK REPLACEMENT AND MAINTENANCE INSTRUCTIONS:

- (1) Timber Removal. Remove all trees within posted Right-of-Way Boundary or individually marked with an orange "C", as specified in Section 2210, Designated Timber.
- (2) Roadside Brushing. Conduct roadside brushing as specified in this Exhibit.
- (3) Excavated Materials. Excavated materials shall be utilized for road and fill construction and hauled in where necessary. Surplus excavation materials shall be hauled to the waste areas as marked in the field and/or designated on Exhibit A. Surplus excavated materials and waste materials shall be sloped and compacted for drainage. Fills shall be thoroughly compacted in accordance with this Exhibit.
- (4) Bank Slough Removal. Excavate all bank slough. Bank slough material shall not be pulled across existing surfacing rock. Excavated material shall be hauled to the designated waste areas as marked in the field and/or designated on Exhibit A.
- (5) Culvert Replacement, Culvert Installation, Fill Reconstruction, and Fill Removal. Existing culvert geometry shall be modified to provide for optimum drainage and culvert performance. Modifications may include, skewing the culvert and/or installing the culvert at gradients equal to or exceeding the drainage (or ditch) gradient. Where fill reconstruction or culvert replacement is specified, fills shall be excavated to natural stream course levels. All woody debris encountered during fill excavation shall be removed. Fill reconstruction backfill shall consist of select materials and may be obtained from borrow pits, as directed by STATE. Unsuitable backfill material shall be hauled to the designated waste areas as marked in the field and/or designated on Exhibit A. Backfill materials shall be hauled in where necessary and thoroughly compacted in accordance with this Exhibit.
- (6) Culvert Cleaning and Repairs. Remove all debris from inside all existing culverts on the road improvement segment, as directed by STATE. Damaged culvert inlets and/or outlets shall be repaired by opening them with a hydraulic jack, or cutting off the culvert end to allow for free passage of water at peak flow levels.
- (7) Drainage Ditches. Restore or construct ditchlines, including ditchouts, as directed by STATE. Clean out all culvert inlets and outlets for a 10-foot radius. Re-establish or construct culvert sediment basins. Waste materials from drainage ditches and sediment basins shall not be pulled across existing surfacing rock, but shall be placed in nearby waste areas.
- (8) Sod Removal. Remove/separate sod from crushed rock surfacing as directed by STATE. Sod material shall be scattered in stable locations through openings in the timber outside of the cleared right-of-way. In areas where sod cannot be scattered in a stable location, material shall be end hauled to designated waste areas as shown on Exhibit A, or other stable locations as directed by STATE.
- (9) Equipment. All excavation and riprap placement shall be performed using a minimum 1½ cubic yard, track-mounted excavator.
- (10) Waste areas shall be uniformly sloped and compacted for drainage.

EXHIBIT D

FOREST ROAD SPECIFICATIONS

GENERAL ROAD IMPROVEMENT, SURFACE ROCK REPLACEMENT AND MAINTENANCE INSTRUCTIONS:

- (11) Subgrade Preparation and Application of Surfacing Rock.
- (a) Complete culvert installations, drainage ditches, fill reconstruction, ditchouts, and other specified work prior to the application of new surfacing rock.
 - (b) Cut out all potholes and/or washboard sections from the existing surfacing.
 - (c) Apply required patching and leveling rock, as directed by STATE.
 - (d) Process (grade and mix) the existing surface and added base rock. Provide for a crown of 4 to 6 percent or outslope of 3 to 4 percent, and compact in accordance to the "Compaction and Processing Requirements" in this Exhibit.
 - (e) Upon completion of above required work, apply, process, and compact surfacing rock in accordance to this Exhibit.

EXHIBIT D

FOREST ROAD SPECIFICATIONS

SPECIFIC ROAD IMPROVEMENT, SURFACE ROCK REPLACEMENT AND MAINTENANCE INSTRUCTIONS (Project No. 2):

<u>Segment</u>	<u>Station</u>	<u>Work Description</u>
1 to 2	0+00 to 243+30	Apply 110 CY of 1½"-0" spot rock to road surface as directed by STATE. Process and compact rock with grader and vibratory roller.
	89+60	Apply 20 CY of 1½"-0" rock to junction. Process and compact rock with grader and vibratory roller.
	89+60 to 95+00	Apply a 2" lift of 3"-0" patch rock to road surface (60 CY). Process and compact rock with grader and vibratory roller.
	126+05 to 243+30 (Pt. 2)	Brush road to specifications in Exhibit E and remove sod and brushing debris from road surface with grader.
	181+45	Remove trees within posted "Right-of-Way" tags on north side of road and pull stumps from old roadbed with excavator. Deck trees and stumps in a stable location. Outslope and compact junction with grader and vibratory roller. Apply 30 CY of jaw-run rock to junction to be used as a landing. Process and compact rock with dozer and vibratory roller.
	182+00	Construct Waste Area 1. Scatter material in timber opening and compact in accordance with this Exhibit.
	190+70	Construct ditchout with excavator at intersection with OHV trail to direct water off surfaced of road.
	195+50 to 201+15	Re-establish ditch with grader and scatter waste in a stable location.
	197+70 to 200+40	Round cutslope with excavator and remove trees marked with "C" in orange paint (approximately 7 trees). Deck trees in a stable location. Excavate and remove approximately 20 CY of material to Waste Area 1.
		Clean out culvert inlets and outlets (approx. 10).
3 to 4	0+00 to 3+50	Brush road to specifications in Exhibit E and hand fall trees within posted "Right-of-Way" tags. Re-open road with grader. Shape and compact surface with grader and vibratory roller. Apply 30 CY of 3"-0" spot rock as directed by STATE. Process and compact spot rock with grader and vibratory roller.
	1+10	Reopen landing with grader. Hand-fall trees within "Right-of-Way" tags and pull stumps with excavator. Deck trees and stumps in a stable location with excavator. Shape surface with grader and compact with vibratory roller. Apply 20 CY of jaw-run rock to landing. Process and compact rock with grader and vibratory roller.
	3+50	Re-open landing. Hand-fall trees within "Right-of-Way" tags and pull stumps with excavator. Deck trees and stumps in a stable location with excavator. Shape surface with grader and compact with vibratory roller. Apply 20 CY of jaw-run rock to landing. Process and compact rock with grader and vibratory roller.

EXHIBIT D

FOREST ROAD SPECIFICATIONS

SPECIFIC ROAD IMPROVEMENT, SURFACE ROCK REPLACEMENT AND MAINTENANCE INSTRUCTIONS (Project No. 2):

5 to 6	0+00 to 2+40 (Pt. 6)	Brush road to specifications in Exhibit E. Hand-fall trees marked with "C" in orange paint and pull stumps with excavator. Deck trees and stumps in a stable location with excavator. Re-align road with dozer within posted "Right-of-Way" tags. Shape surface with grader and compact with vibratory roller.
	2+40 (Pt. 6)	Construct 30'x40' outsloped, unsurfaced landing within posted "Right-of-Way" tags with dozer. Utilize approximately 40 CY of material from through-cut road berm on west side of road as fill. Compact fill in 8-inch lifts with vibratory roller. Shape subgrade with grader and compact with vibratory roller.
7 to 8	0+00 to 9+20	Brush road to specifications in Exhibit E.
	0+00 to 0+50	Apply 10 CY of jaw-run rock as transition rock. Process and compact rock with dozer and vibratory roller.
	0+00 to 4+65	Re-open road with grader. Shape subgrade with grader and compact with vibratory roller.
	4+65	Construct 30'x30' outsloped, unsurfaced landing with dozer. Shape subgrade with grader and compact with vibratory roller.
	4+65 to 9+20 (Pt. 8).	Re-align road subgrade with dozer and excavator. Hand-fall and deck trees and stumps in stable location with excavator. Shape and compact subgrade with grader and vibratory roller.
	8+10	Construct 30'x30' outsloped, unsurfaced landing with dozer. Shape subgrade with grader and compact with vibratory roller.
9 to 10	0+00 to 5+30	Brush road to specifications in Exhibit E. Shape surface with grader and compact with vibratory roller. Apply 30 CY of 1½"-0" spot rock as directed by STATE. Process and compact rock with grader and vibratory roller.
	5+30	Hand-fall trees marked with "Cut" in orange paint (approximately 21 trees). Deck trees in stable location. Pull stumps from existing landing with excavator. Shape and compact landing with grader and compact with vibratory roller. Apply 30 CY of jaw-run rock. Process and compact rock with dozer and vibratory roller.
11 to 12	0+00 to 1+80	Brush road to specifications in Exhibit E and remove sod and brushing debris from road surface with grader. Shape road surface with grader and compact with vibratory roller.
13 to 14	0+00 to 22+70	Apply 20 CY of 1½"-0" rock to road surface as directed by STATE. Process and compact rock with grader and vibratory roller.

EXHIBIT D

FOREST ROAD SPECIFICATIONS

SPECIFIC ROAD IMPROVEMENT, SURFACE ROCK REPLACEMENT AND MAINTENANCE INSTRUCTIONS (Project No. 2 cont'd):

13 to 14 (cont'd)	22+70 to 29+80	Brush road to specifications in Exhibit E and remove sod and brushing debris from road surface with grader. Shape and compact surface with grader and vibratory roller.
	29+80 to 41+40 (Pt. 14)	Re-open road with dozer within posted "Right-of-Way" tags. Shape and compact surface with grader and vibratory roller.
	41+40 (Pt. 14)	Re-open landing within posted "Right-of-Way" tags with dozer. Shape and compact subgrade with grader and vibratory roller.

EXHIBIT D

ROAD SURFACING

ROAD SEGMENT	A to B			POINT TO POINT		Sta. to Sta.		TOTAL VOLUME (CY)	TOTAL VOLUME (TONS)
Application	Rock Size and Type	Location	Depth of Rock (inches)	A to B		0+00 to 5+20			
				Volume (CY) per		Number of			
Transition rock	Jaw-Run	0+00 to 0+50	n/a	10	Load	1	Load	10	14
Culvert Bedding rock	1 1/2"-0"	0+00	n/a	10	Culvert	1	Culvert	10	14
Total Rock for Road Segment: A to B								20	27

ROAD SEGMENT	1 to 2			POINT TO POINT		Sta. to Sta.		TOTAL VOLUME (CY)	TOTAL VOLUME (TONS)
Application	Rock Size and Type	Location	Depth of Rock (inches)	1 to 2		0+00 to 243+30			
				Volume (CY) per		Number of			
Patch rock	3"-0"	89+60 to 95+00	2	11	Station	5.4	Stations	60	81
Landing rock	Jaw-Run	181+45	n/a	30	Landing	1	Landing	30	41
Junction Rock	1 1/2"-0"	89+60	n/a	10	Load	2	Loads	20	27
Spot rock	1 1/2"-0"	0+00 to 243+30	n/a	10	Load	11	Loads	110	149
Total Rock for Road Segment: 1 to 2								220	298

ROAD SEGMENT	3 to 4			POINT TO POINT		Sta. to Sta.		TOTAL VOLUME (CY)	TOTAL VOLUME (TONS)
Application	Rock Size and Type	Location	Depth of Rock (inches)	3 to 4		0+00 to 3+50			
				Volume (CY) per		Number of			
Landing rock	Jaw-Run	1+10 and 3+50	n/a	20	Landing	2	Landings	40	54
Spot rock	3"-0"	0+00 to 3+50	n/a	10	Load	3	Loads	30	41
Total Rock for Road Segment: 3 to 4								70	95

EXHIBIT D

ROAD SURFACING

ROAD SEGMENT	7 to 8			POINT TO POINT		Sta. to Sta.		TOTAL VOLUME (CY)	TOTAL VOLUME (TONS)
Application	Rock Size and Type	Location	Depth of Rock (inches)	7 to 8		0+00 to 9+20			
				Volume (CY) per		Number of			
Transition rock	Jaw-Run	0+00 to 0+50	n/a	10	Load	1	Load	10	14
Total Rock for Road Segment: 7 to 8								10	14

ROAD SEGMENT	9 to 10			POINT TO POINT		Sta. to Sta.		TOTAL VOLUME (CY)	TOTAL VOLUME (TONS)
Application	Rock Size and Type	Location	Depth of Rock (inches)	9 to 10		0+00 to 5+30			
				Volume (CY) per		Number of			
Landing rock	Jaw-Run	5+30	n/a	30	Landing	1	Landing	30	41
Spot rock	1 1/2"-0"	0+00 to 5+30	n/a	10	Load	3	Loads	30	41
Total Rock for Road Segment: 9 to 10							60	82	

ROAD SEGMENT	13 to 14			POINT TO POINT		Sta. to Sta.		TOTAL VOLUME (CY)	TOTAL VOLUME (TONS)
Application	Rock Size and Type	Location	Depth of Rock (inches)	13 to 14		0+00 to 41+40			
				Volume (CY) per		Number of			
Spot rock	1 1/2"-0"	0+00 to 22+70	n/a	10	Load	2	Loads	20	27
Total Rock for Road Segment: 13 to 14								20	27

ROCK CONVERSION FACTORS

Size	1 1/2"-0"	3"-0"	Jaw-Run
Tons/CY	1.35	1.35	1.35

Total Rock Volumes For Projects			
Rock Size	1 1/2"-0"	3"-0"	Jaw-Run
Rock Totals CY	190	90	120
Rock Totals TONS	257	122	162

Maintenance Rock Volumes in CY			
Rock Size	1 1/2"-0"	3"-0"	Jaw-Run
Rock Totals	80	-	-

Roads shall be uniformly graded, shaped and approved by STATE prior to rocking.

EXHIBIT D

ROCK ACCOUNTABILITY

PURCHASER shall obtain subgrade approval from STATE prior to rocking. Rocking shall be limited to periods when weather conditions are acceptable to STATE and when sediment will not enter streams. Additional surfacing needed because of construction season or construction practice is not included in the preceding ROAD SURFACING table, and shall be furnished at PURCHASER expense.

Rock accountability shall be determined by the following methods, as directed by STATE. STATE shall be given 24 hours' notice prior to rocking.

Load Records. Notify STATE before spreading the rock and maintain a record of all rock delivered for spreading. Make the record available for STATE inspection. A report listing the amount of rock delivered the prior month must be submitted no later than the 15th of each month.

EXHIBIT D

COMPACTION AND PROCESSING REQUIREMENTS

Moisture Content: Compaction must take place when moisture content of the materials being compacted is favorable for effective compaction as determined by STATE.

Compaction Pass: A pass is defined as traveling a road section forward and then backward over that same section.

Subgrade. Subgrade surfaces of the road segments listed below shall be graded and compacted. Compaction shall be accomplished by traveling all surfaces from shoulder to shoulder until the surface is smooth and hard and visible deformation ceases. At least 3 passes shall be made over the entire width and length of the road. Compaction shall be accomplished by using one or more of the approved equipment options listed below:

Subgrade shall be crowned at 4 to 6 percent or outsloped at 3 to 4 percent as specified in the "Forest Roads Specifications" table in Exhibit D.

ROAD SEGMENT	SUBGRADE COMPACTION OPTIONS
All road segments.	1

Fills. Embankments and fills shall be placed in (approximately) horizontal layers not more than 8 inches in depth. Each layer shall be separately, and thoroughly, compacted. Compaction equipment shall be operated over the entire width of each layer until visible deformation of the layers ceases. At least 3 passes shall be made over the entire width and length of each layer.

Placing individual rocks or boulders with more depth than the allowed layer thickness shall be permitted, provided the embankment will accommodate them. Such rocks and boulders shall be at least 6 inches below the subgrade. They shall be carefully distributed and the voids filled with finer material, forming a dense and compacted mass. Compaction shall be accomplished by using one or more of the approved equipment options listed below:

ROAD SEGMENT	FILLS COMPACTION OPTIONS
All road segments.	1 and 2

Crushed Rock. The rock shall be uniformly mixed and spread in layers on the approved roadbed. Each layer of crushed rock shall be moistened or dried to uniform moisture content suitable for maximum compaction and compacted in layers not to exceed 6 inches in depth. When more than 1 layer is required, each shall be shaped, compacted, and approved by STATE before the succeeding layer is placed. Any irregularities or depressions that develop during compaction of the top layer shall be corrected by loosening the material at these places and adding or removing material until the surface is smooth and uniform. Each layer shall be compacted with a minimum of 3 passes over the entire width and length of the road until the surface is smooth and hard and visible deformation ceases. Compaction shall be accomplished by using one or more of the approved equipment options listed below:

Rock shall be compacted and processed during the same project period it is spread, unless otherwise approved in writing by STATE.

Rock shall be crowned at 4 to 6 percent, or outsloped at 3 to 4 percent as specified in the "Forest Roads Specifications" table in Exhibit D.

EXHIBIT D

COMPACTION AND PROCESSING REQUIREMENTS

ROAD SEGMENT	CRUSHED COMPACTION OPTIONS
All road segments requiring crushed rock.	1

Jaw-Run Rock. The rock shall be uniformly mixed and spread in layers on the approved roadbed. Each layer of jaw-run rock shall be moistened or dried to uniform moisture content suitable for maximum compaction and compacted in layers not to exceed 8 inches in depth. When more than 1 layer is required, each shall be shaped and compacted before the succeeding layer is placed. Any irregularities or depressions that develop during compaction of the top layer shall be corrected by loosening the material at these places and adding or removing material until the surface is smooth and uniform. Each layer shall be compacted with a minimum of 3 passes over the entire width and length of the road. Compaction shall be accomplished by using one or more of the approved equipment options listed below:)

Rock shall be crowned at 4 to 6 percent, or outsloped at 3 to 4 percent as specified in the "Forest Roads Specifications" table in Exhibit D.

ROAD SEGMENT	PIT-RUN COMPACTION OPTIONS
Segments requiring jaw-run rock	1 and 3

- (1) Vibratory Rollers. The drum shall have a smooth surface, a diameter not less than 48 inches, a width not less than 58 inches, and a turning radius of 15 feet or less. Vibration frequency shall be regulated in steps to 1400, 1500, and 1600 VPM, corresponding to engine speeds of 1575, 1690, and 1800 RPM. The centrifugal force developed shall be 7 tons at 1600 VPM. It shall be activated by a power unit of not less than 25 horsepower. The vibratory roller shall be self-propelled and operated at speeds ranging from 0.9 miles to 1.8 miles per hour, as directed by STATE.
- (2) Vibratory Hand-Operated or Backhoe-Mounted Tamper. Vibratory hand-held or hydraulic tampers shall be used for compaction of backfill materials around culverts and bridge approach embankment materials around abutments. The tamper shoe dimensions shall be a minimum of 10" X 13" and capable of a centrifugal force of 2,250 pounds.
- (3) Dozer. A dozer/track-type tractor weighing a minimum of 45,000 pounds as directed by STATE shall be operated over the Jaw-run rock so that the entire surface comes in contact with the tracks.

EXHIBIT D

CRUSHED ROCK SPECIFICATIONS

Grading Requirements

<u>For 1½"-0"</u>	Passing	2" sieve	100%
	Passing	1½" sieve	90-100%
	Passing	¾" sieve	60-90%
	Passing	¼" sieve	30-50%
	Passing	No. 10 sieve	15-30%
	Passing	No. 40 sieve	7-15%
<u>For 3"-0"</u>	Passing	4" sieve	100%
	Passing	3" sieve	90-100%
	Passing	1½" sieve	60-90%
	Passing	¾" sieve	40-60%
	Passing	¼" sieve	20-40%
	Passing	No. 10 sieve	5-20%
<u>For 6"-0 Jaw-Run</u>	Passing	6" sieve	100%
	Passing	3" sieve	45-65%
	Passing	¼" sieve	0-10%

Control of gradation shall be by visual inspection by STATE.

EXHIBIT D

CULVERT SPECIFICATIONS

All culvert materials shall be furnished and installed by PURCHASER, unless otherwise specified in the Contract.

Culverts 36 inches in diameter and smaller shall be constructed of corrugated polyethylene, unless otherwise specified in the Contract. Culverts larger than 36 inches in diameter shall be constructed of corrugated aluminized Type 2 steel, unless otherwise specified in the Contract. Polyethylene culverts shall be double-walled and meet the requirements of AASHTO M-294-11, Type S, or ASTM F2648. Aluminized (Type 2) steel culverts shall meet the requirements of AASHTO M-36-03¹."

Polyethylene joints shall be made with split couplings, corrugated to engage the culvert corrugations, and shall engage a minimum of 4 corrugations, 2 on each side of the culvert joint.

Culverts shall be located according to the alignment and grade as shown on the Plan and Profile, and/or as staked in the field, or as specified in special instructions.

The STATE Representative shall determine final culvert locations and stake the locations in the field prior to installation.

Culverts in live streams shall be installed with the inlet and outlet on grade with the stream bottom, unless otherwise specified in writing.

Cross Drain Culverts

Cross drain culverts on road grades in excess of 3 percent shall be skewed at least 30 degrees from perpendicular to the road centerline, except that cross drain culverts at the low point of dips in roads shall not be skewed. Cross drains shall be skewed to fit the required culvert length to the road prism.

Cross drain culverts shall be installed at a slope steeper than the incoming ditch grade, but not less than 3 percent or greater than 10 percent.

Disconnect Culverts

The culvert inlet shall be located as close to the channel that it is disconnecting, while the culvert outlet shall be located as far from the channel as possible; discharge culvert outflow on the forest floor, allowing for filtration before the water enters the disconnected channel.

The foundation and trench walls for all culverts shall be free from logs, stumps, limbs, stones, and other objects which would dent or damage the culvert. The culvert trench shall be excavated 3 culvert diameters wide to permit compaction and working on each side of the culvert. Tamping shall be done in 6-inch lifts, 1 culvert diameter each side of the culvert. Bedrock shall be excavated as required to provide a uniform foundation for the full length of the culvert.

A bedding of crushed rock as specified shall be placed to provide a wide band of support and to transmit the load from above evenly over the entire length of the culvert for all culverts.

Backfill shall consist of crushed rock on improvement segments and crushed rock, or job-excavated soil free of stumps, limbs, rocks, or other objects which would damage the culvert on new construction segments.

Transporting of the culvert shall be done carefully. Dragging or allowing free fall from trucks or into trenches shall not be permitted.

Minimum height of cover over top of culvert to subgrade when road is to be rocked shall be as follows: 12" for culverts 18" to 36" and 18" for culverts 42" to 96", add 6" for roads which will not be rocked. Minimum vertical cover for other designs shall be as specified by STATE.

EXHIBIT D

CULVERT SPECIFICATIONS

Lengths of individual culvert sections shall be not less than 10 feet, unless otherwise provided for in special instructions. The shortest culvert section length shall be placed at the inlet end.

The ends of each culvert shall be free of logs and debris which would restrict the free flow of water.

The intake end of cross drain and disconnect culverts shall be provided with a sediment catching basin 3 feet in diameter at the bottom. The outlet end of any culvert which would allow water to erode embankment soil shall be provided with an energy dissipator, half round, or other approved slope protection device. Construct lead-off ditches away from culvert outlets where the slope gradients restrict the free flow of water.

Culverts 24 inches in diameter or larger shall have 1:1 beveled inlets.

All culverts scheduled for replacement shall become property of the PURCHASER and be removed from STATE land in the same project period in which replacement occurred. Damaged culvert inlets and/or outlets shall be repaired by opening them with a hydraulic jack, or cutting off the culvert end to allow for free passage of water at peak flow levels.

The intake ends of culverts in fills less than 3 feet to the top of the culvert shall be marked by driving white fiberglass posts within 6 inches of the downgrade side. Posts shall be a minimum of 6 feet long and 2½ inches wide, with the spade driven 2 feet into the ground. Install a culvert marker at each existing culvert that is missing a marker that could be reached by a grader blade.

Half rounds shall be installed within 72 hours of culvert installation, unless otherwise approved in writing by STATE. Steel posts used with half round installation shall be painted with rust preventative paint.

A manufacturer's certification that the product was manufactured, tested, and supplied in accordance with this specification shall be furnished to STATE upon request.

CULVERT LIST

CULVERT NO.	DIAMETER (Inches)	LENGTH (Feet)	MATERIAL TYPE	ROAD SEGMENT POINT TO POINT	STATION
1	18	40	CPP	A to B	0+00


CPP = Polyethylene

EXHIBIT D

WATERBAR SPECIFICATIONS

PROFILE


DITCHED AND OUTSLOPED

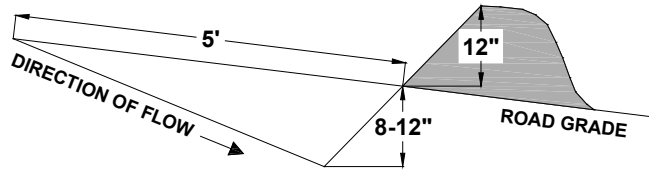


SPACING OF WATERBARS	
ROAD GRADE	DISTANCE
< 6 %	400'
6 - 10 %	200'
11 - 15 %	150'
> 15 %	100'

CROSS SECTION

DITCHED




OUTSLOPED

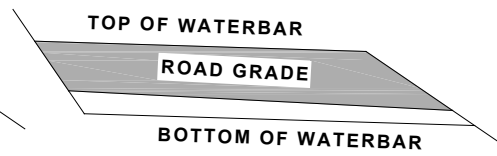

CONSTRUCT DITCHOUT THRU ANY EXISTING BERM.
CROSS DRAINAGE GRADIENT MINIMUM 3%.

PLAN VIEW

DITCHED

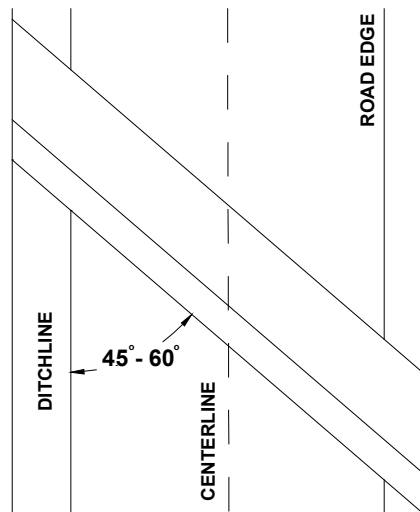

OUTSLOPED


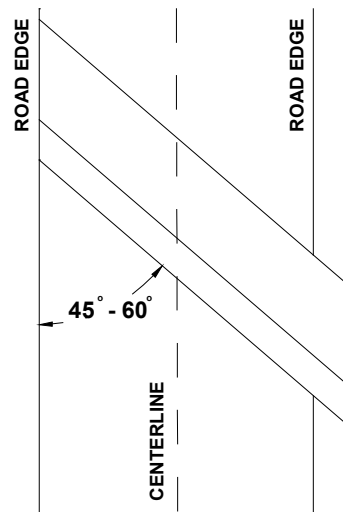


EXHIBIT D


TANKTRAP SPECIFICATIONS

PROFILE DITCHED AND OUTSLOPED

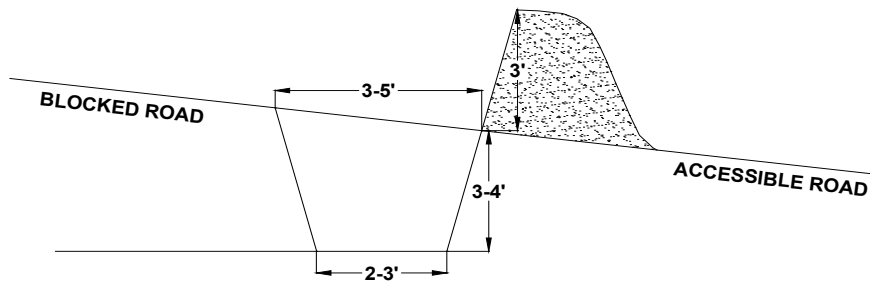


CROSS SECTION

DITCHED




OUTSLOPED

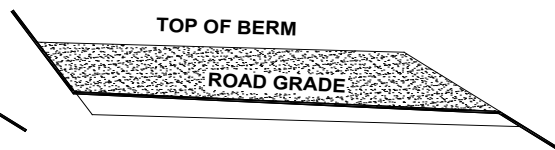


CONSTRUCT DITCHOUT THRU ANY EXISTING BERM.
CROSS DRAINAGE GRADIENT MINIMUM 3%

PLAN VIEW

DITCHED

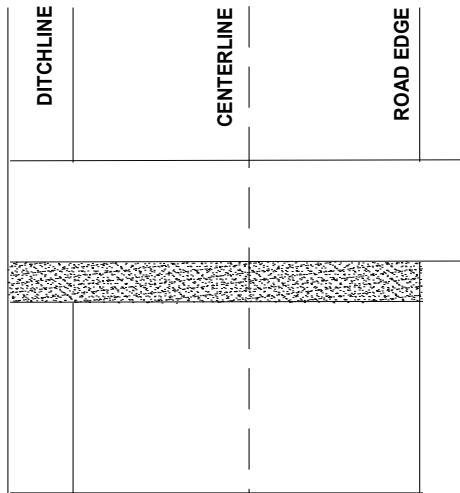

OUTSLOPED

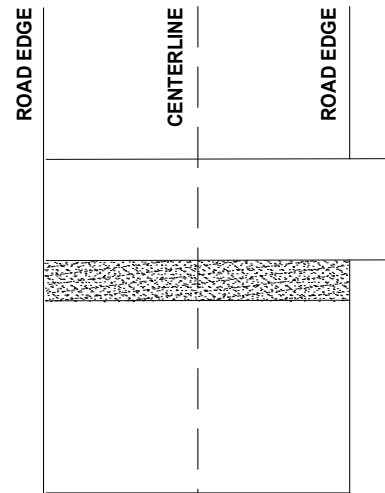

DIRECTION OF FLOW
↓

It should be sloped to drain with a relief ditch through the down slope edge of the road. The trench shall be behind the berm for approaching traffic.

EXHIBIT E
ROAD BRUSHING SPECIFICATIONS

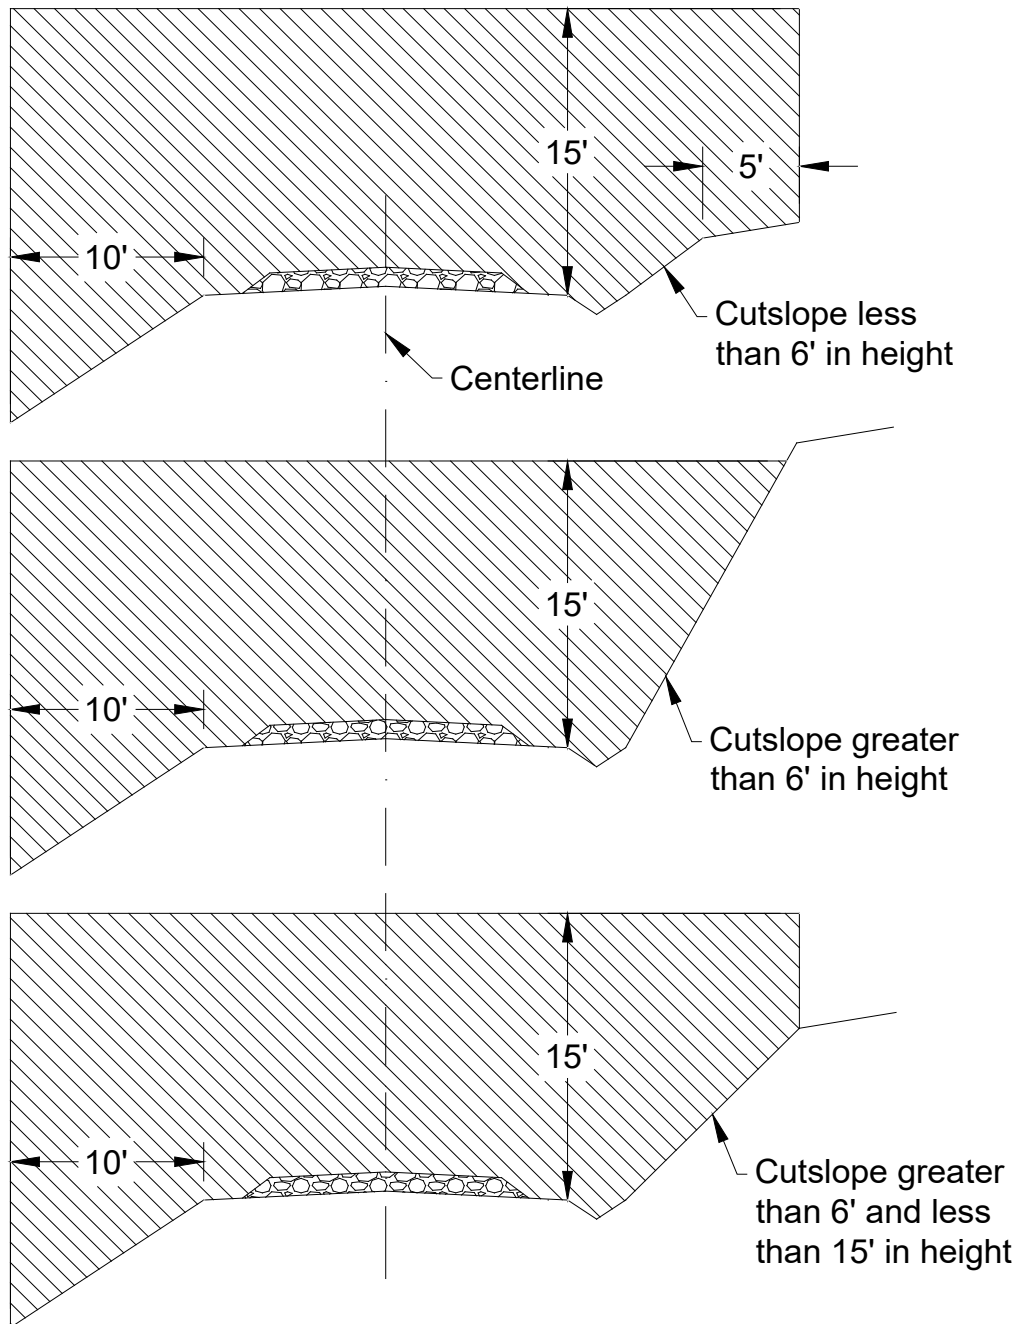


EXHIBIT E

ROAD BRUSHING SPECIFICATIONS

CUTTING REQUIREMENTS:

The minimum height of brushing shall be for all situations 15 feet from the road surface, and the minimum width of brushing on the down slope side of the road shall be 10 feet horizontal distance. The minimum width of brushing on the cutslope side of the road shall be dictated by the height of the cutslope as indicated in the three drawings above. In situations where site distance is an issue, brushing heights on the cutslope may vary from the above drawings, as directed by STATE. All turnouts and turnarounds encountered shall be brushed.

Brush and trees shall be cut to a maximum height of 6 inches above the ground surface or obstructions such as rocks or existing stumps. All vegetation on the road surface shall be cut flush to the road surface.

CLEAN-UP and DEBRIS REMOVAL:

Debris resulting from the brushing operation shall be removed from the roadway, cutslope, ditches, water courses, culvert inlets/outlets, and sediment catch basins. Debris shall be mulched or scattered downslope from the road or placed in other stable locations. Large debris, 6 inches or larger in diameter, shall be mulched or cut into lengths 6 feet or less to facilitate rapid decay, unless otherwise approved by STATE.

Trees larger than 6 inches in diameter at stump height, located within brushing limits but outside of the ditchline or shoulder, shall not be cut down, but shall be limbed for road visibility.

Existing debris on the roadway, cutslope, ditchline, or catch basin shall be removed and treated. Debris shall be mulched or scattered downslope from the road or placed in other stable locations. Large non-merchantable debris, 6 inches or larger in diameter, shall be mulched or cut into lengths 6 feet or less to facilitate rapid decay, unless otherwise approved by STATE.

Merchantable blown down trees encountered shall be bucked in lengths as directed by STATE, and placed in locations acceptable to STATE, or pushed out of the road prism.

When spur roads to be brushed end with a landing, the landing is to be brushed as directed by STATE.

CULVERT AND ROAD MARKER DAMAGES: Culvert and road markers damaged, or any portion of a marker damaged from PURCHASER activities shall be replaced.

EXHIBIT E
ROAD BRUSHING SPECIFICATIONS

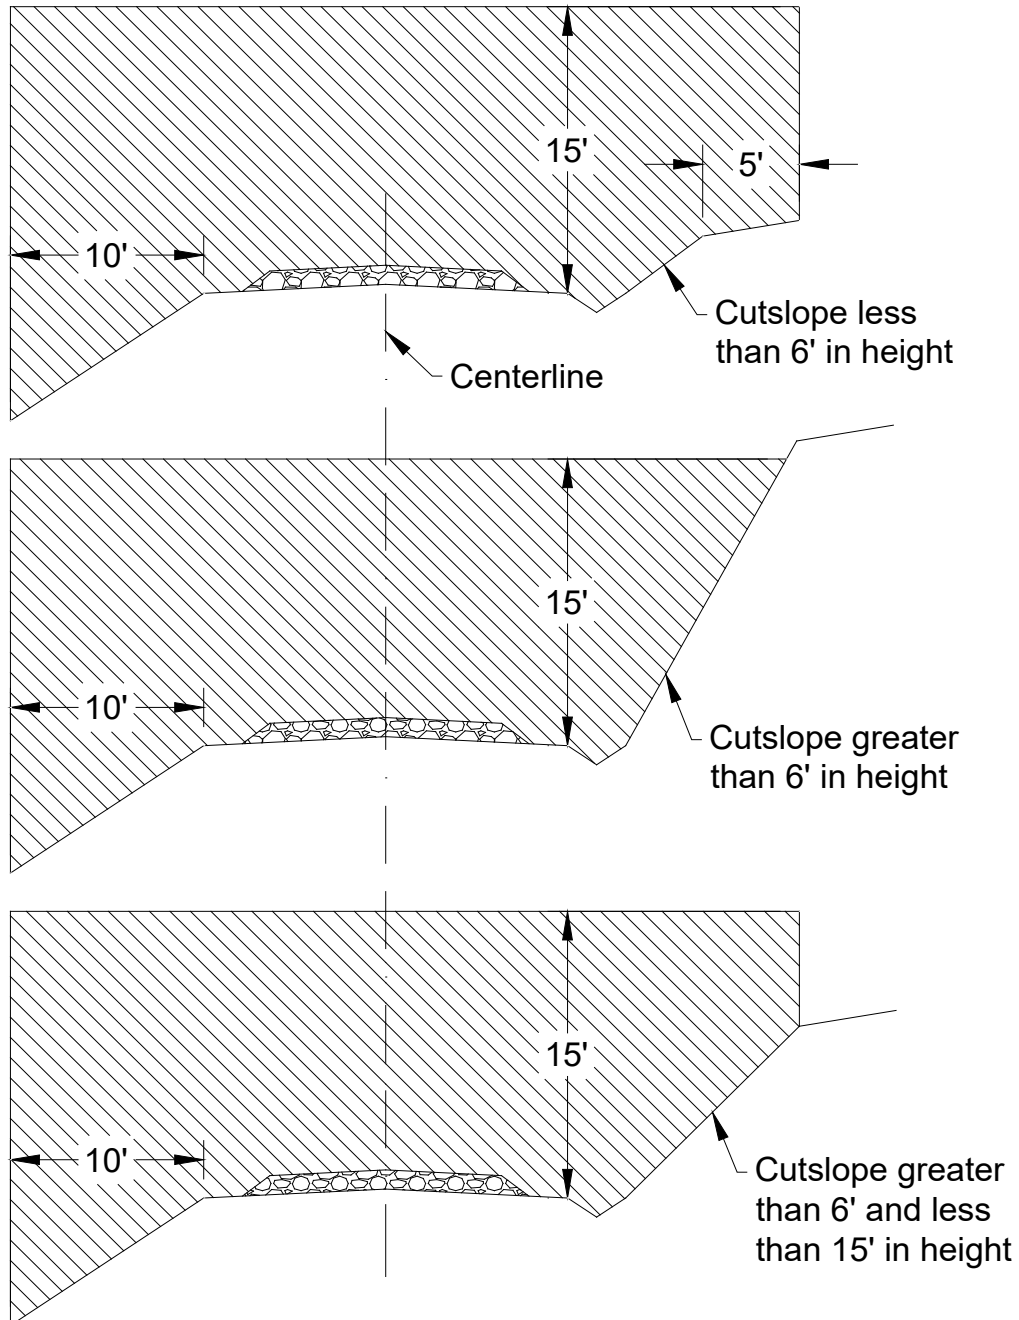


EXHIBIT E

ROAD BRUSHING SPECIFICATIONS

CUTTING REQUIREMENTS:

The minimum height of brushing shall be for all situations 15 feet from the road surface, and the minimum width of brushing on the down slope side of the road shall be 10 feet horizontal distance. The minimum width of brushing on the cutslope side of the road shall be dictated by the height of the cutslope as indicated in the three drawings above. In situations where site distance is an issue, brushing heights on the cutslope may vary from the above drawings, as directed by STATE. All turnouts and turnarounds encountered shall be brushed.

Brush and trees shall be cut to a maximum height of 6 inches above the ground surface or obstructions such as rocks or existing stumps. All vegetation on the road surface shall be cut flush to the road surface.

CLEAN-UP and DEBRIS REMOVAL:

Debris resulting from the brushing operation shall be removed from the roadway, cutslope, ditches, water courses, culvert inlets/outlets, and sediment catch basins. Debris shall be mulched or scattered downslope from the road or placed in other stable locations. Large debris, 6 inches or larger in diameter, shall be mulched or cut into lengths 6 feet or less to facilitate rapid decay, unless otherwise approved by STATE.

Trees larger than 6 inches in diameter at stump height, located within brushing limits but outside of the ditchline or shoulder, shall not be cut down, but shall be limbed for road visibility.

Existing debris on the roadway, cutslope, ditchline, or catch basin shall be removed and treated. Debris shall be mulched or scattered downslope from the road or placed in other stable locations. Large non-merchantable debris, 6 inches or larger in diameter, shall be mulched or cut into lengths 6 feet or less to facilitate rapid decay, unless otherwise approved by STATE.

Merchantable blown down trees encountered shall be bucked in lengths as directed by STATE, and placed in locations acceptable to STATE, or pushed out of the road prism.

When spur roads to be brushed end with a landing, the landing is to be brushed as directed by STATE.

CULVERT AND ROAD MARKER DAMAGES: Culvert and road markers damaged, or any portion of a marker damaged from PURCHASER activities shall be replaced.